


A = 3.96 * No. of Spaces

B = A + 3.96

* Available in 2 through 20 circuits

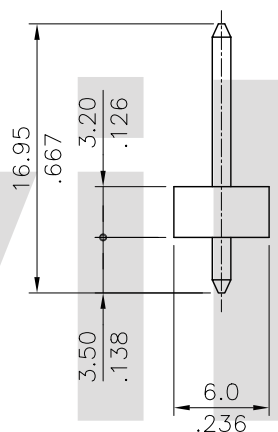

Material:


* Insulation: Glass filled polyester UL 94V-0

* Contact: Brass

Ordering Code:


CI77 ** P * V 00
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Circuits
- ③ Contact type: P= Pin header
- ④ Plating option:
 1= 3.05μm(120μ") Min. Tin
 over 0.76μm(30μ") Nickel
 2= Gold flash plated over
 1.27μm(50μ") Nickel
- ⑤ Tail Style: V= Straight
- ⑥ Other Option: 00= Color White (Standard)

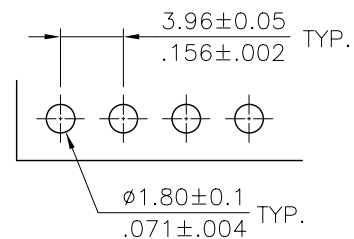

Recommended P.C. Board Layout

RoHS Compliant

4						DATE	UNIT: mm / inch	TITLE:	3.96MM(.156") BOARD MOUNT PIN HEADER	 瀚荃股份有限公司 CviLux Corporation
3						06/09-04'	TOLERANCE UNLESS OTHERWISE SPECIFIED	BOARD MOUNT PIN HEADER		
2						06/09-04'	.X ± 0.38/.015 X' ± 1'	MATERIAL:	DRAWING NO.	CI7701SE
1	SUN	6/09/04'	ECN04233			06/09-04'	.XX ± 0.25/.010 X' ±	FINISH:	PART NO.	CI77**P*V00
SYM	NAME	DATE	REVISIONS			06/09-04'	.XXX ± 0.10/.004 .XX' ±		SCALE	2 / 1
									SHEET	1 OF 1

CVILUX.CORP
 2004.06.09
 ISSUED