

Material:
* Insulation: Glass filled polyester UL 94V-0
* Contact: Brass

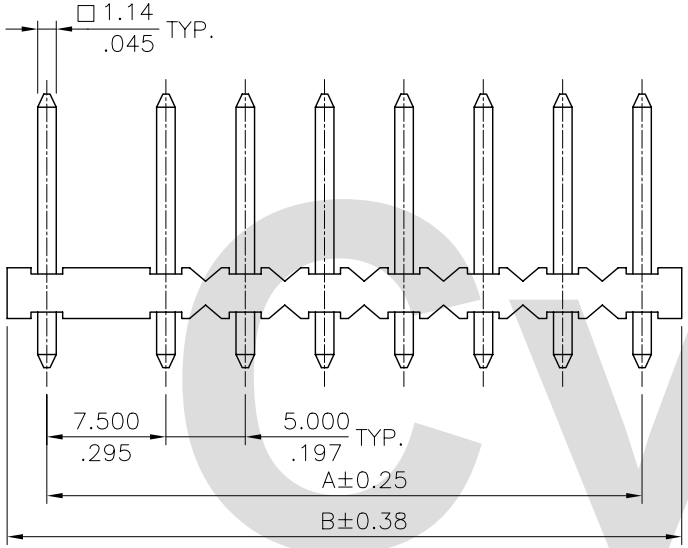

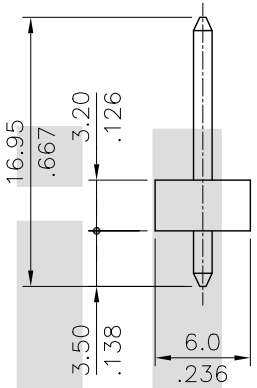

A = 5.00 * No. of Spaces + 2.50
B = A + 5.00
* Available in 2 through 20 circuits

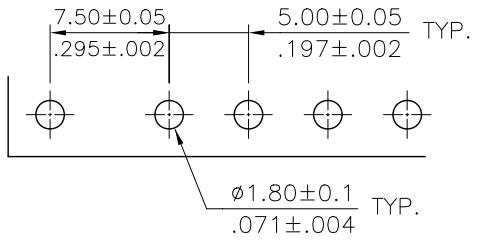

Recommended P.C. Board Layout

Ordering Code:

CI79 / ** / P / 1 / V / *0
① ② ③ ④ ⑤ ⑥

① Series No.
CI79= 7.5-5.0mm center spacing
② No. of Circuits
③ Contact type: P= Pin header
④ Plating option:
1= 3.05μm(120μ") Min. Tin over 0.76μm(30μ") Nickel
2= Gold flash plated over 1.27μm(50μ") Nickel
3= 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
4= 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
⑤ Tail Style: V= Straight
⚠ ⑥ Option: 00= Color White(Nature)
10= Color Black

RoHS Compliant

SYM	NAME	DATE	REVISIONS
4			
3			
2			
1	SUN	8/10/04'	ECN04305

CVILUX.CORP 2004.08.10 ISSUED

		DATE
DRAWN BY:	Sun	08/10-04'
ENGINEER:	Eisley	08/10-04'
CHECKED BY:	David	08/10-04'
APPROVED BY:	Alex	08/10-04'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X ± 0.38/.015	X.° ± 1°
.XX ± 0.25/.010	.X° ±
.XXX ± 0.15/.006	.XX° ±

TITLE: 7.50-5.00MM(.295"-.197") BOARD MOUNT PIN HEADER

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CI7901SD	PART NO.	CI79**P1V*0
SCALE	2 / 1	SHEET 1 OF 1	