
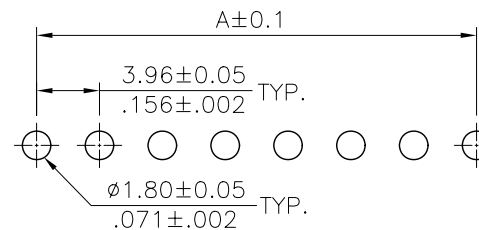


A = 3.96 x No. of Spaces

B = A + 3.96

\* Available in 2 through 24 circuits

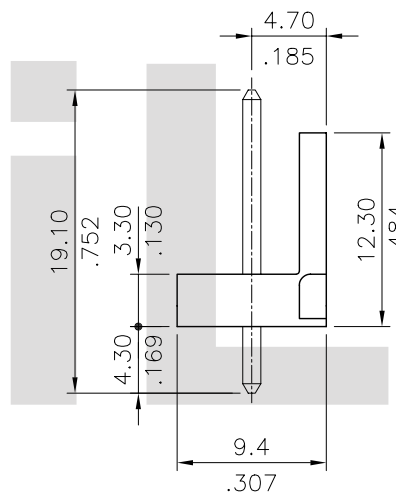

Recommended P.C. Board Layout

Material:

\* Insulation: Glass filled polyester UL 94V-0  
Color White(Nature)

\* Contact: Brass

Ordering Code:

CI82 \*\* P \* V OL  
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Circuits
- ③ Contact type: P= Pin header
- ④ Plating option:  
1= 3.05µm(120µ") Min. Tin  
over 0.76µm(30µ") Nickel  
2= Gold flash plated over  
1.27µm(50µ") Nickel  
3= 0.38µm(15µ") Gold plated  
over 1.27µm(50µ") Nickel  
4= 0.76µm(30µ") Gold plated  
over 1.27µm(50µ") Nickel
- ⑤ Tail Style: V= Straight
- ⑥ Option: OL= Without Locking Ramp

RoHS Compliant

4						DATE	UNIT: mm / inch	TITLE: 3.96MM(.156") STRAIGHT DIP HEADER	
3			DRAWN BY: Sun		10/03-03'	TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL:	
2			ENGINEER: Eisley		10/06-03'	.X ± 0.38/.015	X' ± 1"	FINISH:	
1	SUN	9/30/03'	ECN03330/ECR03030-0		CHECKED BY: David	10/08-03'	.XX ± 0.25/.010	.X' ±	
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	10/08-03'	.XXX ± 0.10/.004	.XX' ±	DRAWING NO. CI8203SD	PART NO. CI82**P*VOL
								SCALE 2 / 1	SHEET 1 OF 1