
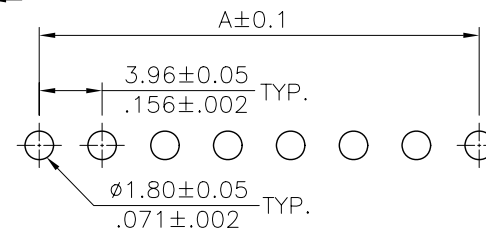


A = 3.96 x No. of Spaces

B = A + 3.96

* Available in 2 through 24 circuits

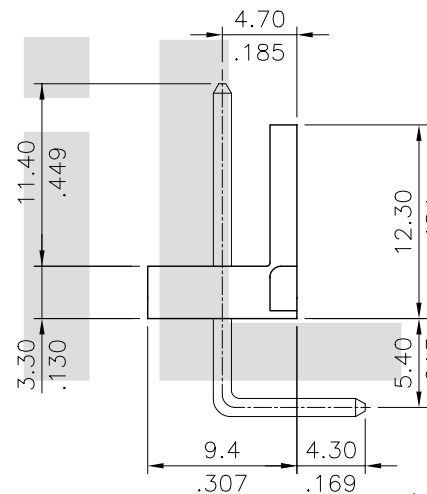

Material:

* Insulation: Glass filled polyester UL 94V-0
Color White(Nature)

* Contact: Brass

Ordering Code:

CI82 ** P * H 0L
① ② ③ ④ ⑤ ⑥

① Series No.

② No. of Circuits

③ Contact type: P= Pin header

④ Plating option:

1= 3.05μm(120μ") Min. Tin
over 0.76μm(30μ") Nickel

2= Gold flash plated over
1.27μm(50μ") Nickel

3= 0.38μm(15μ") Gold plated
over 1.27μm(50μ") Nickel


4= 0.76μm(30μ") Gold plated
over 1.27μm(50μ") Nickel

⑤ Tail Style: H= Right angle

⑥ Option: 0L= Without Locking Ramp

Recommended P.C. Board Layout

RoHS Compliant

4				<div>CVILUX.CORP</div> <div>2003.10.08</div> <div>ISSUED</div>			DATE	UNIT: mm / inch	TITLE: 3.96MM(.156") RIGHT ANGLE HEADER	<div></div> <div>瀚荃股份有限公司</div> <div>CviLux Corporation</div>			
3					DRAWN BY:	Sun	10/03-03'	TOLERANCE UNLESS OTHERWISE SPECIFIED			MATERIAL:		
2					ENGINEER:	Eisley	10/06-03'	.X ± 0.38/.015	X' ± 1"				
1	SUN	9/30/03'	ECN03330/ECR03030-0		CHECKED BY:	David	10/08-03'	.XX ± 0.25/.010	.X' ±		FINISH:	DRAWING NO.	CI8204SD
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	10/08-03'	.XXX ± 0.10/.004	.XX' ±		SCALE	2 / 1	SHEET	1 OF 1