
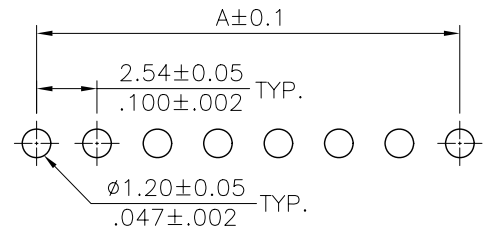


A = 2.54 x No. of Spaces
 B = A + 2.54
 * Available in 2 through 36 circuits

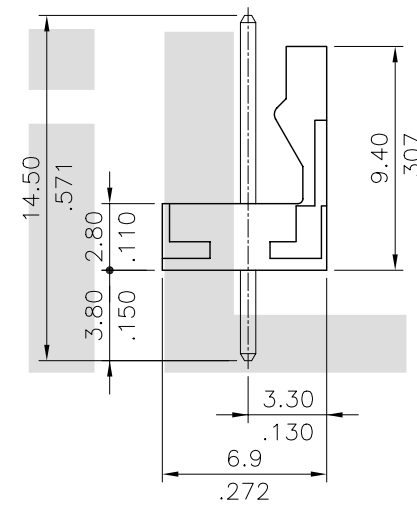

Material:
 * Insulation: Glass filled polyester UL 94V-0
 Color White(Nature)

* Contact: Brass

Ordering Code:

CI83 ** P * V 00
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Circuits
- ③ Contact type: P= Pin header
- ④ Plating option:
 1= 3.05µm(120µ") Min. Tin over 0.76µm(30µ") Nickel
 2= Gold flash plated over 1.27µm(50µ") Nickel
 3= 0.38µm(15µ") Gold plated over 1.27µm(50µ") Nickel
 4= 0.76µm(30µ") Gold plated over 1.27µm(50µ") Nickel
- ⑤ Tail Style: V= Straight
- ⑥ Option: 00= Standard

Recommended P.C. Board Layout

RoHS Compliant

							DATE	UNIT: mm / inch		TITLE: 2.54MM(.100") STRAIGHT DIP HEADER		瀚荃股份有限公司 CviLux Corporation				
					DRAWN BY:	Jim	03/13-06'	TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL:						
					ENGINEER:	Eisley	03/20-06'	.X ± 0.30/.012	X' ± 1'		FINISH:		DRAWING NO.	CI8301SD	PART NO.	CI83**P*V00
	1	Jim	3/13/06'		ECN06083/ECR06013-1	CHECKED BY:	David	03/20-06'	.XX ± 0.20/.008	.X' ±		SCALE		3 / 1	SHEET	1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	03/20-06'	.XXX ± 0.10/.004	.XX' ±								