

Material:




\* Insulation: Glass filled polyester UL 94V-0  
Color White(Nature)

\* Contact: Brass

Ordering Code:

CI83 \*\* P \* V OL  
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Circuits
- ③ Contact type: P= Pin header
- ④ Plating option:  
1= 3.05μm(120μ") Min. Tin  
over 0.76μm(30μ") Nickel  
2= Gold flash plated over  
1.27μm(50μ") Nickel  
3= 0.38μm(15μ") Gold plated  
over 1.27μm(50μ") Nickel  
4= 0.76μm(30μ") Gold plated  
over 1.27μm(50μ") Nickel
- ⑤ Tail Style: V= Straight
- ⑥ Option: OL= Without Locking Ramp

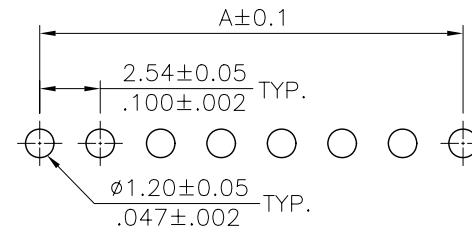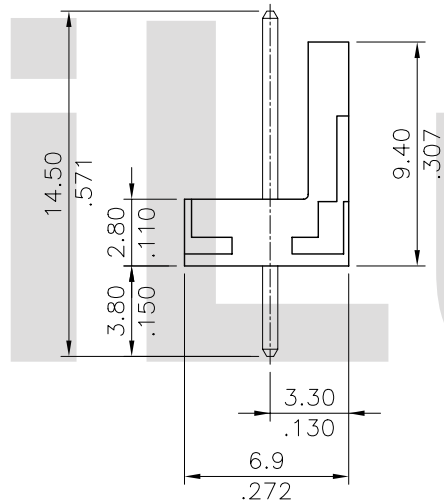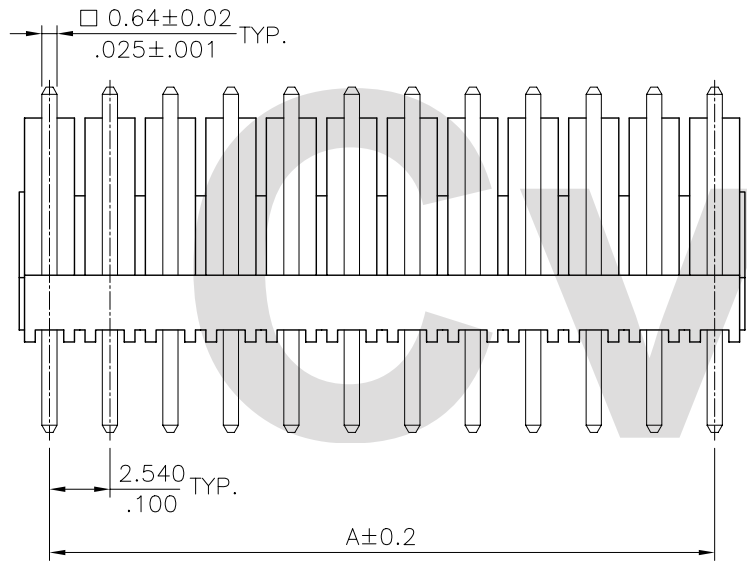


A = 2.54 x No. of Spaces

B = A + 2.54

\* Available in 2 through 36 circuits

Recommended P.C. Board Layout

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 2.54MM(.100") STRAIGHT DIP HEADER	 瀚荃股份有限公司 CviLux Corporation
3					2006.03.20 ISSUED	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
2					DRAWN BY: Jim	.X ± 0.30/.012	.X' ± 1"	DRAWING NO. CI8304SD
1	Jim	3/13/06'	ECN06083/ECR06013-1		ENGINEER: Eisley	.XX ± 0.20/.008	.X' ±	PART NO. CI83**P*VOL
SYM	NAME	DATE	REVISIONS		CHECKED BY: David	.XXX ± 0.10/.004	.XX' ±	SCALE 3 / 1
					APPROVED BY: Alex			SHEET 1 OF 1