

Materials :

Insulator : Nylon 46 UL 94V-0

Contact : Phosphor Bronze

Ordering Code:

CJ07 66 3 1 1 NF-G
 ① ② ③ ④ ⑤ ⑥

① Series No.

② Contacts:

66 = 6P6C ; 64 = 6P4C ; 62 = 6P2C

③ Plating option:

2 = Gold flash plated over
1.27μm(50μ") Nickel

3 = 0.38μm(15μ") Gold plated over
1.27μm(50μ") Nickel




4 = 0.76μm(30μ") Gold plated over
1.27μm(50μ") Nickel

④ Ports: 1 = 1 port


⑤ Insulator Color: 1 = Black

⑥ Other options:



NF-G = Without Flange

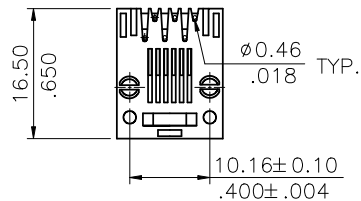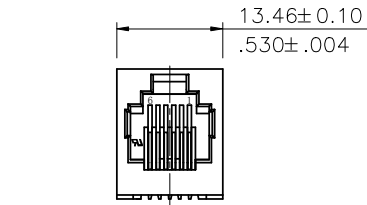

6 POSITION




Detail A

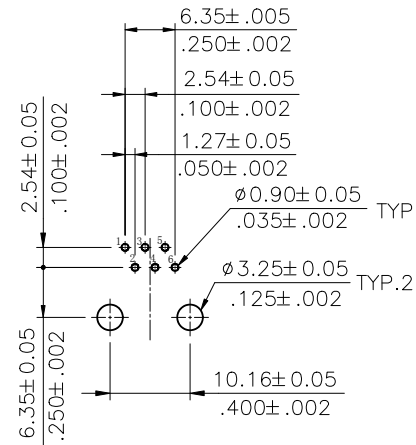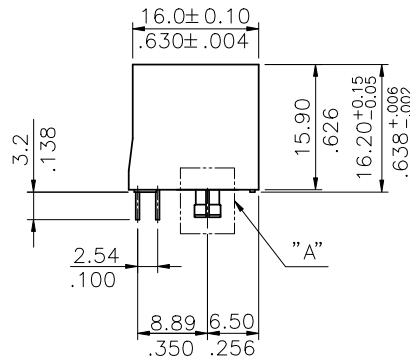

Recommended PC Board Layout

Lead Free Process

RoHS Compliant

| | | | | | | | | |
|-----|------|------|-----------|--------------------|-------------------|------------------------|---|--|
| ④ | | | | | DATE | UNIT: mm / inch | TITLE: BOARD MOUNT TOP ENTRY TELEPHONE JACK |  瀚荃股份有限公司 CviLux Corporation |
| ③ | | | | | DRAWN BY: Sun | 4/26-11' | TOLERANCE UNLESS OTHERWISE SPECIFIED | |
| ② | | | | | ENGINEER: Easley | 4/26-11' | .X ± 0.20/.008 X' ± 1" | MATERIAL: |
| ① | | | | | CHECKED BY: David | 4/26-11' | .XX ± 0.15/.006 X ± | FINISH: |
| SYM | NAME | DATE | REVISIONS | APPROVED BY: David | 4/26-11' | .XXX ± 0.05/.002 .XX ± | | DRAWING NO. CJ0708SA PART NO. CJ07***11NF-G |
| | | | | | | | | SCALE 1 / 1 SHEET 1 OF 1 |

