
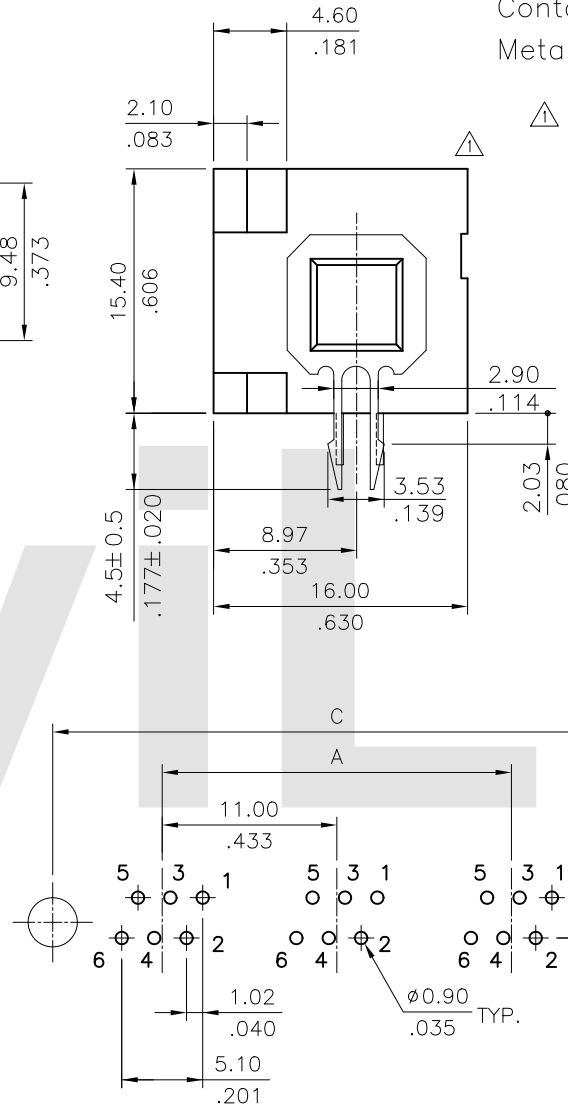
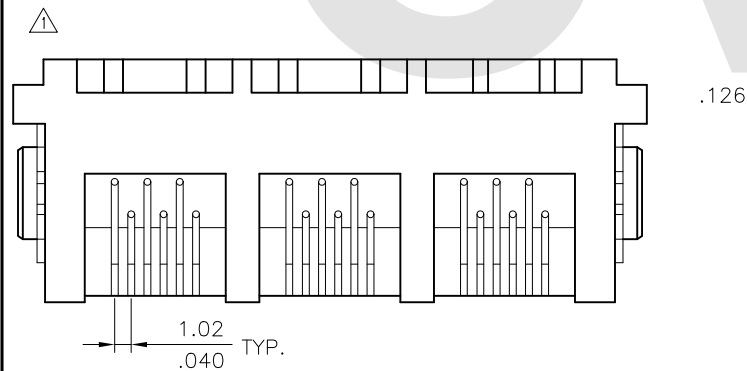


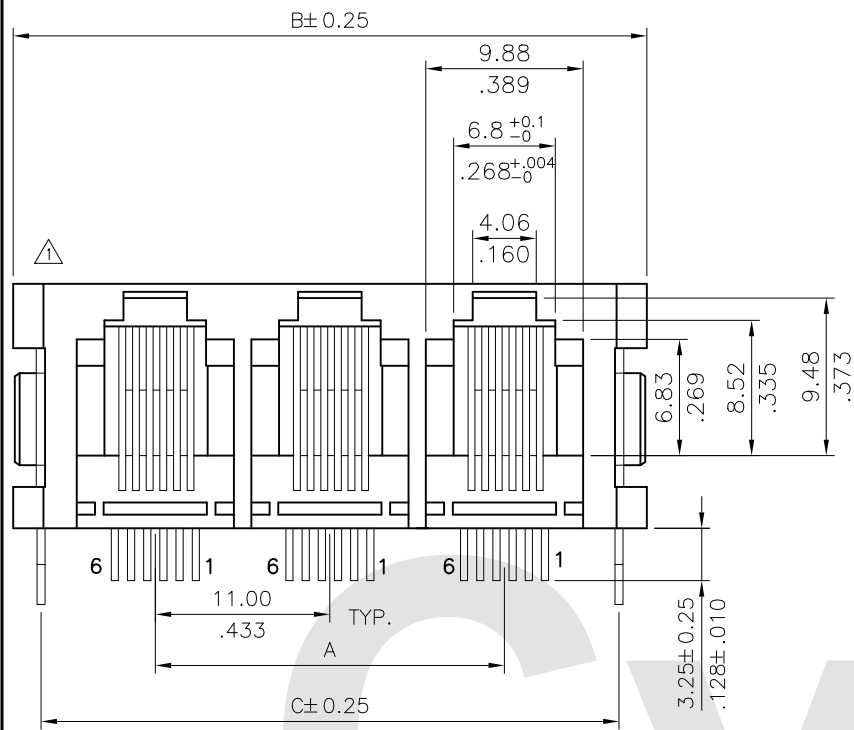

Material:

Insulation: Glass filled polyester UL 94V-0

Contact: Phosphor Bronze

Metal Peg: Phosphor Bronze with Tin plated

Ports	Dimension		
	A	B	C
1	0	17.00(.669)	13.8(.543)
2	11.00(.433)	28.00(1.102)	24.8(.976)
3	22.00(.868)	39.00(1.535)	35.8(1.409)
4	33.00(1.299)	50.00(1.969)	46.8(1.842)
5	44.00(1.732)	61.00(2.402)	57.8(2.276)
6	55.00(2.165)	72.00(2.835)	68.8(2.709)
7	66.00(2.598)	83.00(3.268)	79.8(3.142)
8	77.00(3.030)	94.00(3.701)	90.8(3.575)

Ordering Code

CJ30 66 2 * 9 00
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Contacts: 64=6P4C, 66=6P6C
62=6P2C
- ③ Plating option:
2= Gold flash plated over Nickel
3= 0.38um(15u") Gold plated
over 1.27um(50u") Nickel
- ④ Ports: see above table
- ⑤ Insulator Color: 9= Gray
- ⑥ Other options: 00= Standard

Recommended P.C. Board Layout

Lead Free Process

RoHS compliant

4			2016.08.04 ISSUED			DATE	UNIT: mm / inch		TITLE: 6 POSITION SIDE ENTRY MTEAL PEGS PCB GANG JACK	 瀚荃股份有限公司 CviLux Corporation			
3				DRAWN BY:	Karen	7/26-16'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
2				ENGINEER:	Sun	7/27-16'	.X ± 0.25 / .010	X: ± 1"					
1	Ken	7/20-16'	ECNT116157/ECRT116058	CHECKED BY:	Eisley	7/28-16'	.XX ± 0.13 / .005	.X ±	MATERIAL:		DRAWING NO.	CJ3001SC	PART NO.
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	7/28-16'	.XXX ± 0.05 / .002	.XX ±	FINISH:	SCALE	2 / 1	SHEET	1 OF 1