


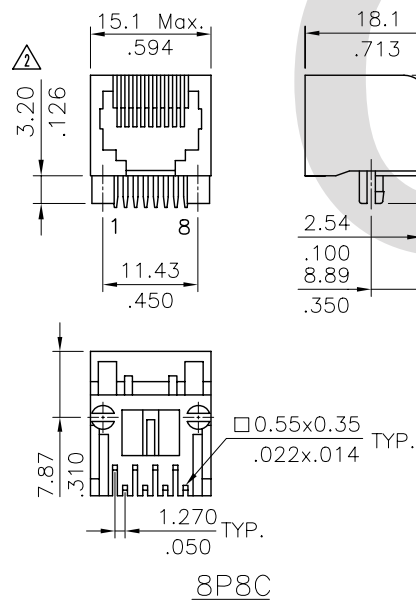


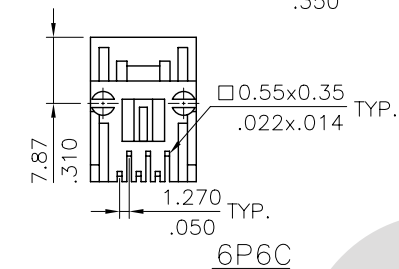



Insulator : Glass filled Polyester UL 94V-0
Contact : Phosphor Bronze

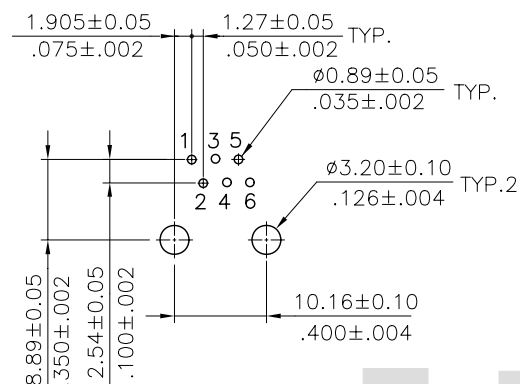

Recommended PC Board Layout

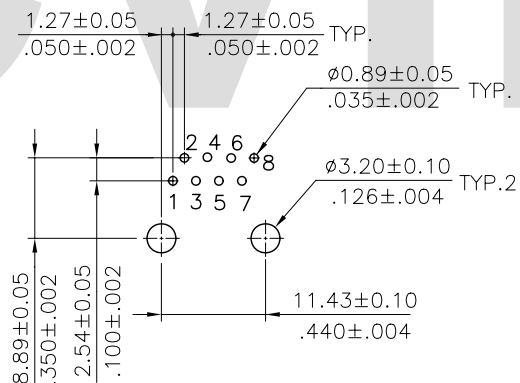

Recommended PC Board Layout

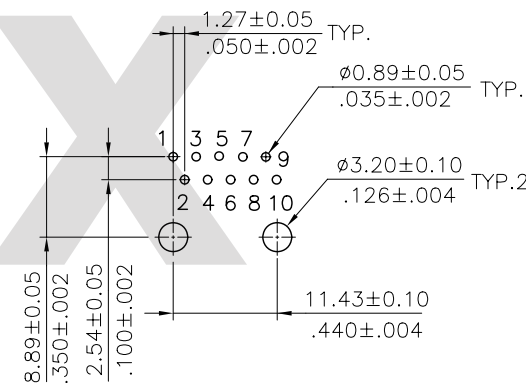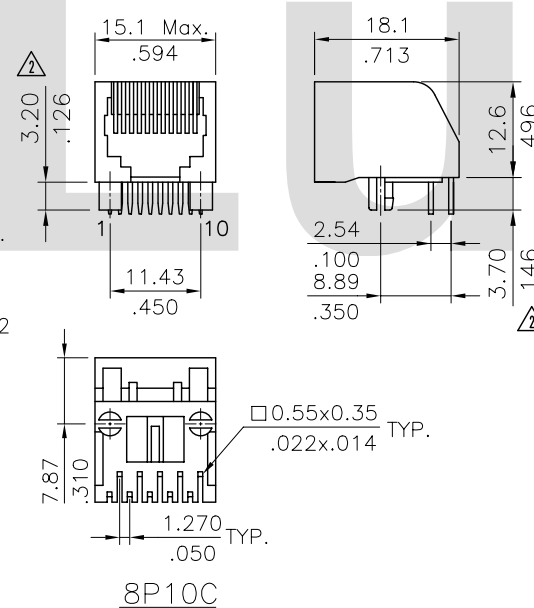

Recommended PC Board Layout

CJ31	**	*	1	1	00
①	②	③	④	⑤	⑥

- ① Series No.
- △ ② Contacts: 64=6P4C, 66=6P6C
88=8P8C, AA=8P10C
- ③ Plating option:
A= Selective Gold flash plated over Nickel
B= Selective 0.38μm(15μ") Gold plated over Nickel
C= Selective 0.76μm(30μ") Gold plated over Nickel
- ④ 1= Single port
- ⑤ Insulator Color: 1= Black
- ⑥ Other options: 00= Standard

RoHS Compliant

4				CVILUX CORP 2009.03.10 ISSUED		DATE	UNIT: mm / inch		TITLE: BOARD MOUNT LOW PROFILE SIDE ENTRY TELEPHONE JACK		 瀚荃股份有限公司 CviLux Corporation					
3					DRAWN BY:	Karen	3/2-09'	TOLERANCE UNLESS OTHERWISE SPECIFIED								
2	Karen	3/02-09'	ECN09068/ECR09007-0		ENGINEER:	Eisley	3/2-09'			.X ± 0.30 / .012 X" ± 1" .XX ± 0.20 / .008 .X" ±					MATERIAL:	
1	SUN	5/21/04'	ECN04205/ECR04047-0		CHECKED BY:	Eisley	3/2-09'	.XXX ± 0.08 / .003 .XX" ±				FINISH:				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	3/2-09'								DRAWING NO.	CJ3101SG	PART NO.
											SCALE	1 / 1	SHEET	1	OF	1