

Notes:

- * Insulation: LCP, UL 94V-0
- * Contact: Phosphor Bronze
- * For Lead-Free IR Reflow process

Ordering Code:


CB03 ** 2 S 1 00 -NH
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② NO. of Circuits:
- ③ Plating code:
2= Gold flash plated over
1.27μm(50μ") Nickel
- ④ Tail Style: S= SMT TYPE
- ⑤ Color: 1= Black
- ⑥ Options: 00= Standard
- ⑦ -NH= For Lead Free IR Processes
and Halogen-Free

A = 1.00 * No. of Spaces

B = A + 1.50

* Available in 2 through 50 circuits

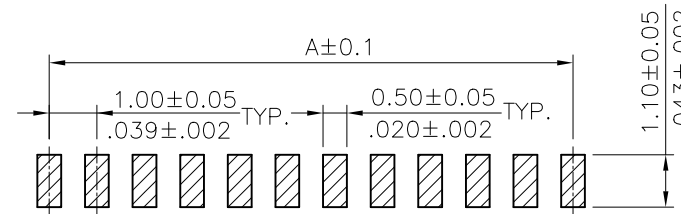

Recommended P.C. Board Layout

Halogen-Free

Lead Free Process

RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: 1.00MM(.039") SMT TYPE SINGLE ROW PIN HEADER	瀚荃股份有限公司 CviLux Corporation
③				DRAWN BY: Sandy	2/3-16'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
②				ENGINEER: Sun	2/15-16'	.X ± 0.30 / .012 .X' ± 1"		
①				CHECKED BY: Eisley	2/16-16'	.XX ± 0.20 / .008 .X' ±	FINISH:	
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	2/16-16'	.XXX ± 0.10 / .004 .XX' ±	DRAWING NO. CB0301SA	PART NO. CB03**2S100-NH
							SCALE 6 / 1	SHEET 1 OF 1

CVILUX CORP
 2016.02.18
 ISSUED