
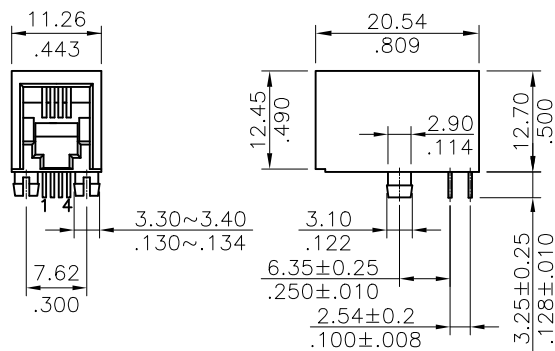
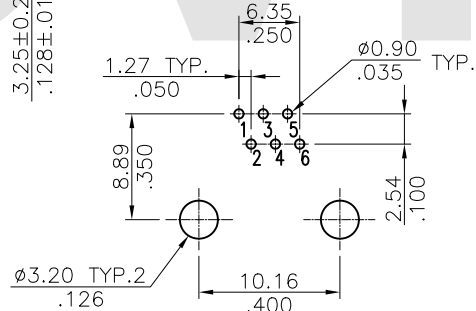




Recommended PC Board Layout

4 POSITION

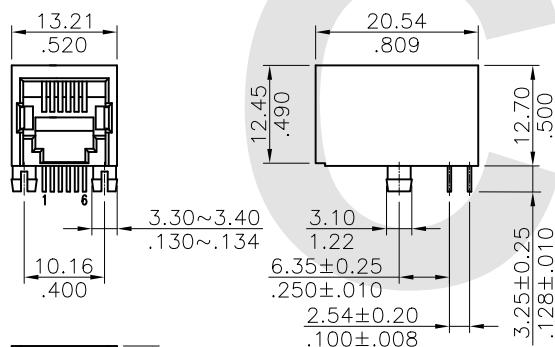


Recommended PC Board Layout

6 POSITION

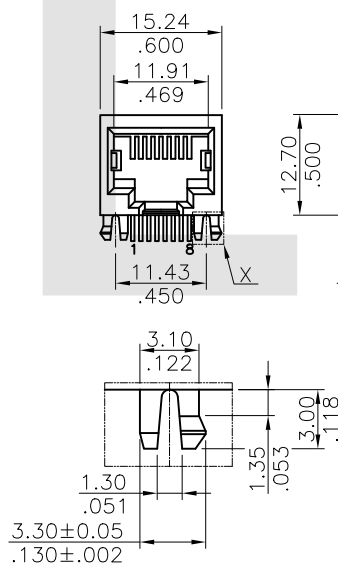

DETAIL X

8 POSITION

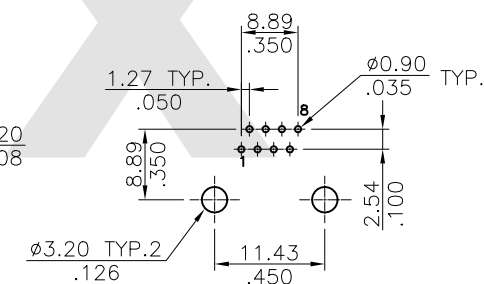

Recommended PC Board Layout

Notes:

- * Insulator : Glass filled Polyester UL 94V-0
- * Contact : Phosphor Bronze
- * For Tin-Lead Wave Flow Process

Ordering Code:

CJ36 66 3 1 1 00
① ② ③ ④ ⑤ ⑥

① Series No.

② Contacts:

44= 4P4C ; 42= 4P2C

66= 6P6C ; 64= 6P4C

62= 6P2C

88= 8P8C

③ Plating option:

2= Gold flash plated over Nickel

3= 0.38μm(15μ") Gold plated over
1.27μm(50μ") Nickel

4= 0.76μm(30μ") Gold plated over
1.27μm(50μ") Nickel

④ Ports: 1= 1 port

⑤ Insulator Color: 1= Black

⑥ Other options: 00= Standard

Tin-Lead Process

RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: BOARD MOUNT SIDE ENTRY TELEPHONE JACK
③						TOLERANCE UNLESS OTHERWISE SPECIFIED	
②						.X ± 0.25 / .010 X" ± 1"	MATERIAL:
①	Karen	6/22-15'	ECNT115131\ECRT115049	CHECKED BY:	Eisley	6/23-15'	FINISH:
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	6/23-15'	

CIVILUX CORP
2015.06.25
ISSUED

DRAWN BY: Karen

6/22-15'

ENGINEER: Sun

6/23-15'

CHECKED BY: Eisley

6/23-15'

APPROVED BY: Eisley

6/23-15'



瀚荃股份有限公司
CivLux Corporation

DRAWING NO.	CJ3601SC	PART NO.	CJ36***1*00
SCALE	1 / 1	SHEET	1 OF 1