


Material:

Insulation: Glass filled polyester UL 94V-0

Contact: Phosphor Bronze

Shield: Brass with Nickel plated

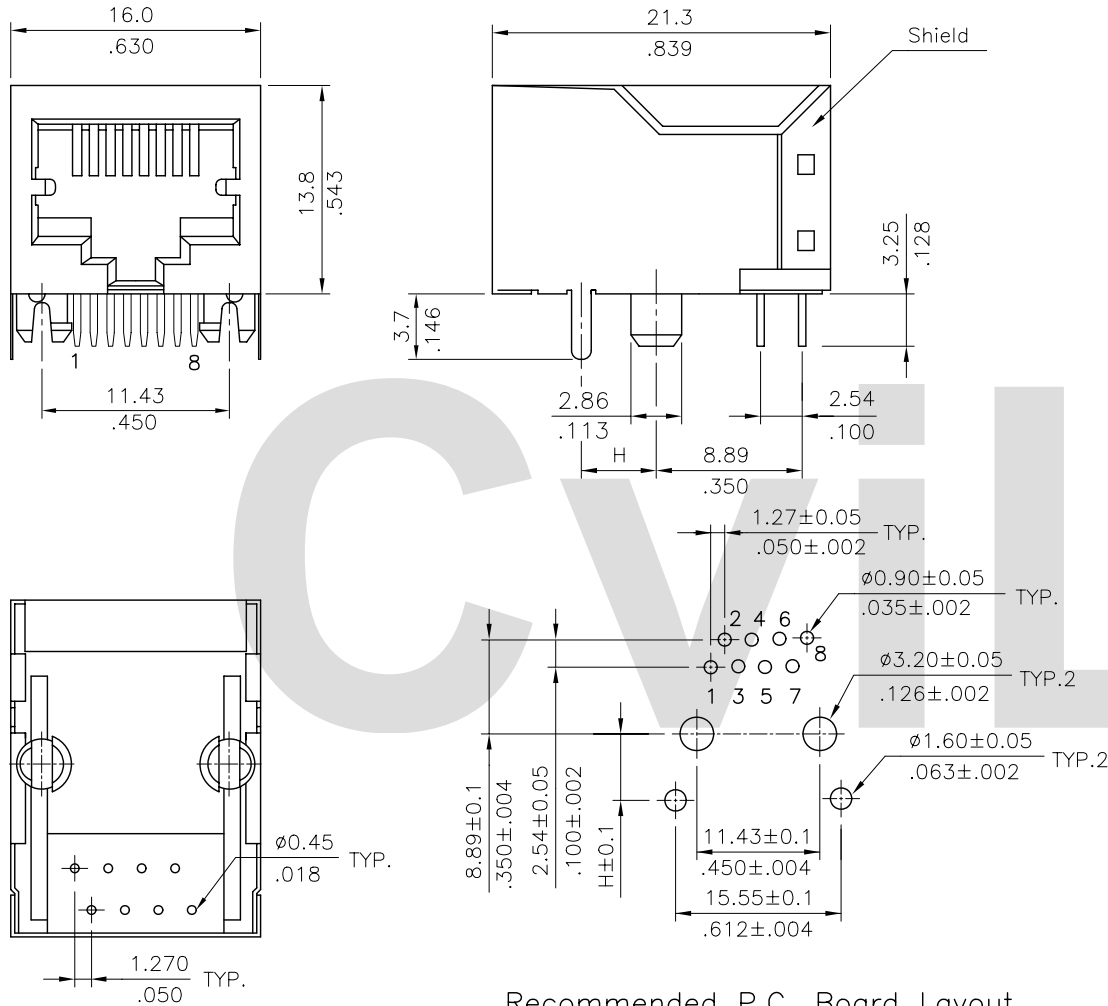

Recommended P.C. Board Layout


Ordering Code:

CJ48 88 2 1 1 0 A
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Contacts: 88= 8P8C
- ③ Plating option:
 2= Gold flash plated over 1.27 μ m(50 μ "") Nickel
 3= 0.38 μ m(15 μ "") Gold plated over 1.27 μ m(50 μ "") Nickel
 4= 0.76 μ m(30 μ "") Gold plated over 1.27 μ m(50 μ "") Nickel
 5= 1.27 μ m(50 μ "") Gold plated over 1.27 μ m(50 μ "") Nickel
- ④ Ports: 1= 1 port
- ⑤ Insulator Color: 1= Black
- ⑥ Panel Ground code:
 0= Non-Panel Ground
- ⑦ Dim. H size options:
 A= 4.57mm
 B= 3.65mm
 C= 3.05mm

CVILUX CORP.
 2004.06.03
 ISSUED

RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: 1 PORT 8 POSITION BOARD MOUNT SIDE ENTRY SHIELDED TELEPHONE JACK	 瀚荃股份有限公司 CviLux Corporation		
③				DRAWN BY: Sun	5/28-04'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:			
②				ENGINEER: David	5/31-04'	.X ± 0.30/.012 X' ± 1"	CUSTOMER: F3E021	DRAWING NO. CJ4801SI	PART NO. CJ4888*110*	
①	SUN	5/17/04'	ECN04199/ECR04043-0	CHECKED BY: David	5/31-04'	.XX ± 0.20/.008 .X' ±		SCALE 2 / 1	SHEET 1 OF 1	
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	5/31-04'	.XXX ± 0.08/.003 .XX' ±				