




Notes:

- \* Insulation: Nylon 6T+30% G.F., UL 94V-0
- \* Contact: Phosphor Bronze
- \* For Lead Free Wave Processes

Ordering Code:

$\frac{CB22}{①}$   $\frac{**}{②}$   $\frac{2}{③}$   $\frac{H}{④}$   $\frac{1}{⑤}$   $\frac{00}{⑥}$

- ① Series No.
- ② NO. of Circuits:
- ③ Plating code:  
2= Gold flash plated over  
1.27 $\mu$ m(50 $\mu$ ) Nickel
- ④ Tail Style: H= Right Angle
- ⑤ Color: 1= Black
- ⑥ Options: 00= Standard

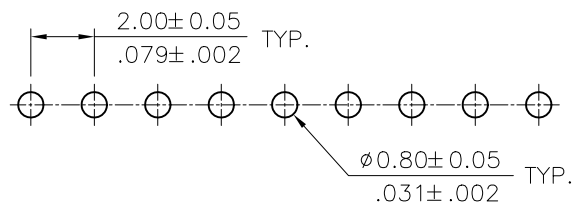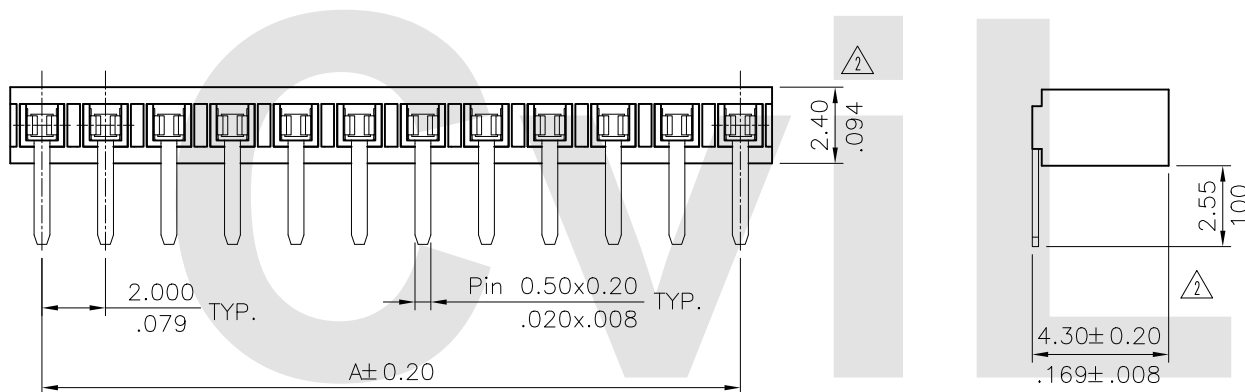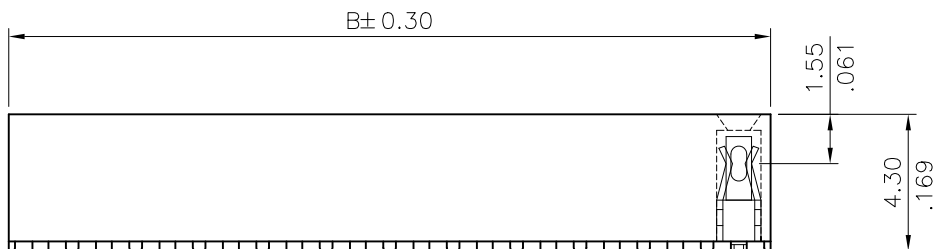


A = 2.00 \* No. of Spaces  
 B = A + 2.00  
 \* Available in 2 through 40 circuits

Lead Free Process

RoHS Compliant

Recommended P.C. Board Layout

④					DATE	UNIT: mm / inch	TITLE: 2.00MM(.079") SINGLE ROW BOARD MOUNT CONNECTOR	 瀚荃股份有限公司 CviLux Corporation
③					DRAWN BY: Sandy	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
②	Sandy	10/4-16'	ECNT116225		ENGINEER: Sun	.X ± 0.30 / .012 X' ± 1'	FINISH:	DRAWING NO. CB2202SC PART NO. CB22**2H100
①	Sun	12/17/04	ECN04505		CHECKED BY: Eisley	.XX ± 0.20 / .008 X' ±		SCALE 6 / 1 SHEET 1 OF 1
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley	.XXX ± 0.10 / .004 XX' ±		

