

Material:

Insulation: Glass filled polyester UL 94V-0

Contact: Phosphor Bronze

Ordering Code:

$\frac{CJ97}{①} \frac{66}{②} \frac{2}{③} \frac{2}{④} \frac{1}{⑤} \frac{00}{⑥}$

① Series No.

② Contacts: 66= 6P6C ; 64= 6P4C
62= 6P2C





③ Plating option:

2= Gold flash plated over Nickel
3= $0.38\mu\text{m}(15\mu\text{'})$ Gold plated over
 $1.27\mu\text{m}(50\mu\text{'})$ Nickel
4= $0.76\mu\text{m}(30\mu\text{'})$ Gold plated over
 $1.27\mu\text{m}(50\mu\text{'})$ Nickel

④ Ports: 2 ports

⑤ Insulator Color: 1= Black

⑥ Grounding pegs options:
00= Standard

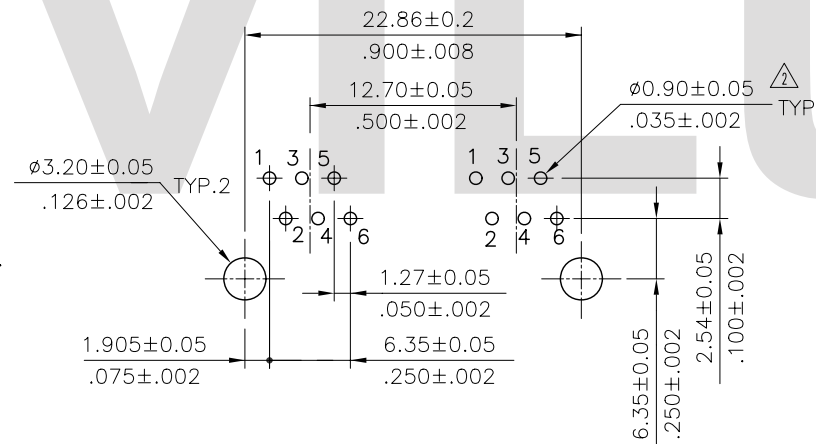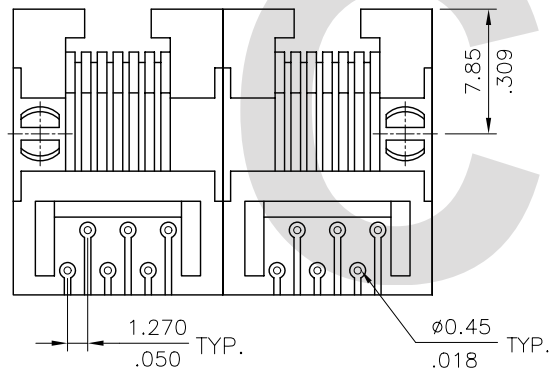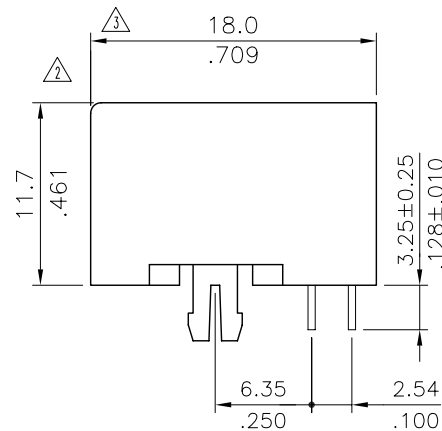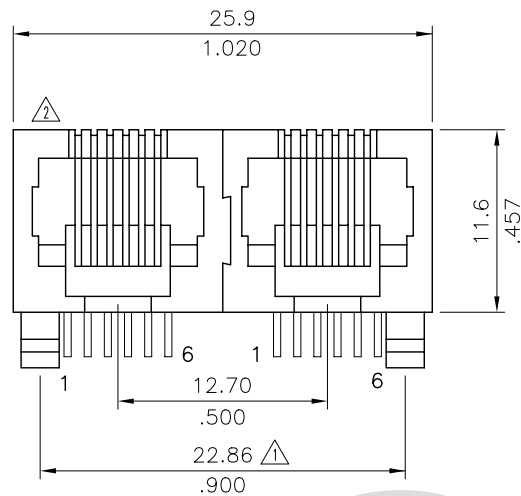

Recommended P.C. Board Layout

Lead Free Process

RoHS Compliant



④					DATE	UNIT: mm / inch	TITLE: 6 POSITION SIDE ENTRY VERY LOW PROFILE GANG JACK	 瀚荃股份有限公司 CviLux Corporation			
③	Karen	10/8-08'	ECN08505	DRAWN BY:	Karen	10/08-08'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
②	Karen	9/10-08'	ECN08434/ECR08069-0	ENGINEER:	Eisley	10/13-08'	.X ± 0.30 / .012 X' ± 1"	DRAWING NO. CJ9703SE PART NO. CJ976**2100			
①	SUN	12/02/03'	ECN03435	CHECKED BY:	Alex	10/13-08'	.XX ± 0.20 / .008 .X' ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	10/13-08'	.XXX ± 0.08 / .003 .XX' ±	FINISH:			
								SCALE	2 / 1	SHEET	1 OF 1