

Material:

Insulation: Glass filled polyester UL 94V-0, Color Black

Contact: Phosphor Bronze

Shield: Brass with Nickel plated

Ordering Code

CJA9 88 B D 1 0 A
① ② ③ ④ ⑤ ⑥ ⑦

① Series No.

② Contacts: 88=8P8C

③ Plating option:

B= Selective 0.38 μ m(15 μ) Gold plated over 1.27 μ m(50 μ) Nickel

C= Selective 0.76 μ m(30 μ) Gold plated over 1.27 μ m(50 μ) Nickel

E= Selective 1.27 μ m(50 μ) Gold plated over 1.27 μ m(50 μ) Nickel

F= Selective 0.15 μ m(6 μ) Gold plated over 1.27 μ m(50 μ) Nickel

④ Ports: 6=6 ports, 8=8 port, C=12 ports, D=16 ports

⑤ Insulator Color: 1= Black

⑥ Panel Ground code:


0= Non-Panel Ground (12 and 16 Ports Not Available)

S= Panel Ground on 4 Side


⑦ Other options: A= With Inner Shield

B= Without Inner Shield

E $\pm$ 0.1

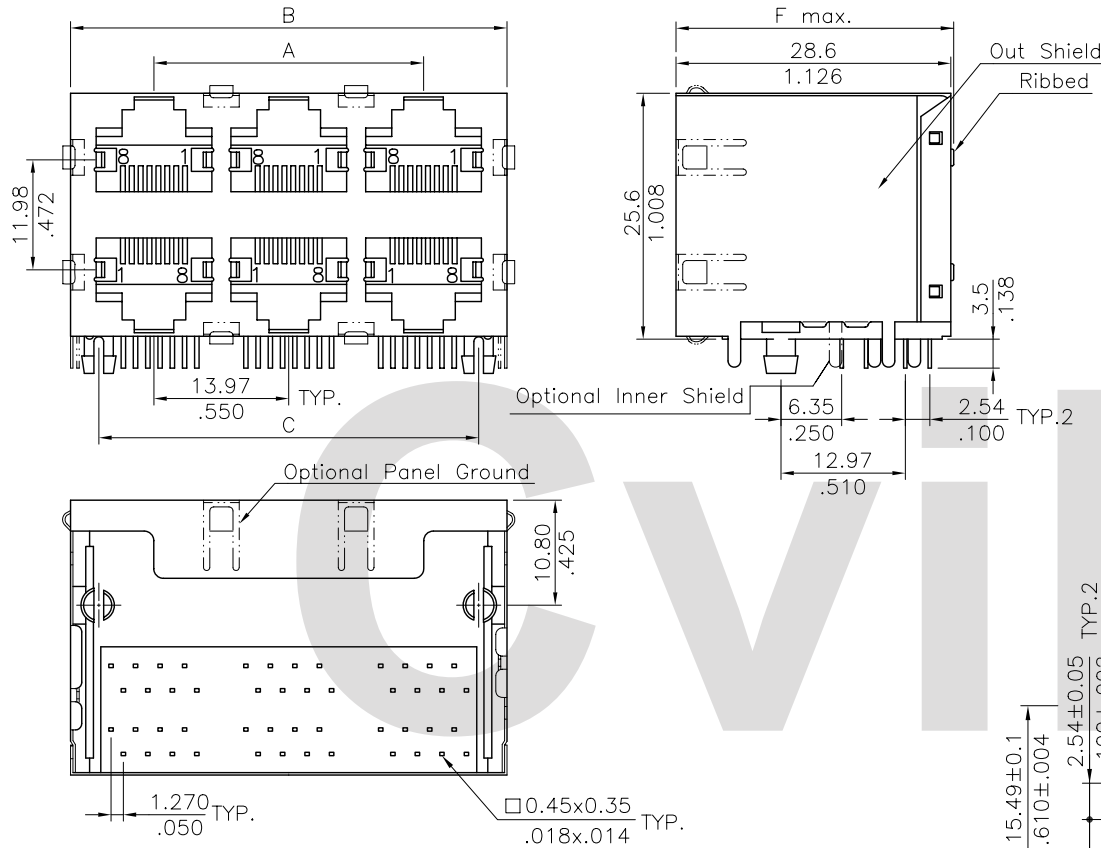

Ports	Dimension					
	A	B	C	D	E	F
6	27.94(1.100)	45.2(1.780)	39.37(1.550)	43.43(1.710)	44.95(1.770)	29.5(1.161)
8	41.91(1.650)	59.2(2.331)	53.34(2.100)	57.40(2.260)	58.92(2.3200)	29.5(1.161)
12	69.85(2.750)	87.2(3.433)	81.28(3.200)	85.34(3.360)	86.86(3.420)	29.8(1.173)
16	97.79(3.850)	115.2(4.535)	109.22(4.300)	113.28(4.460)	114.80(4.520)	30.0(1.181)

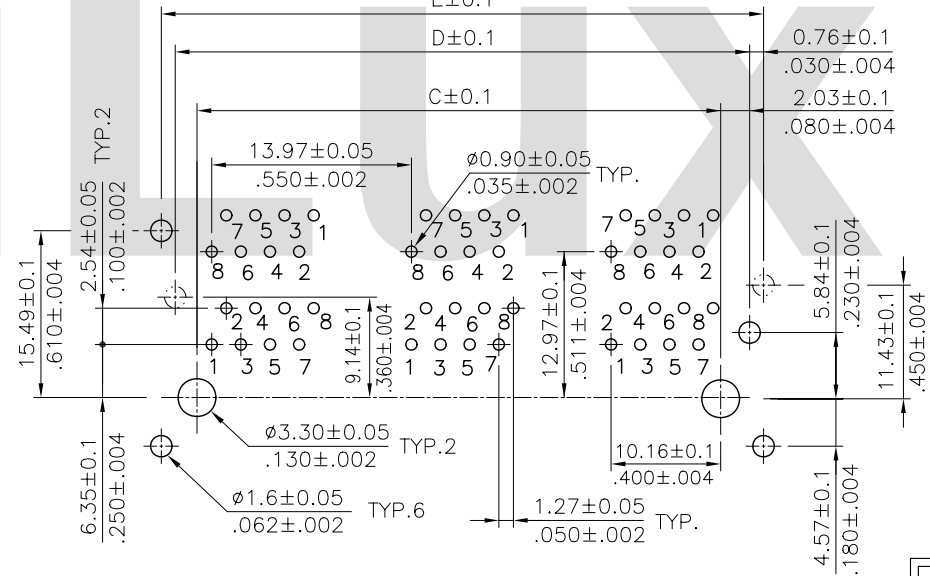

Recommended P.C. Board Layout

RoHS Compliant

④				CVILUX CORP. 2004.11.23 ISSUED		DATE	UNIT: mm / inch		TITLE: 8 POSITION STACKE TYPE SIDE ENTRY SHELD TELEPHONE	 瀚荃股份有限公司 CviLux Corporation				
③					DRAWN BY:	Sun	11/16-04'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
②					ENGINEER:	Eisley	11/18-04'	.X ±0.30/.012	X' ± 1"		MATERIAL:			
①	SUN	11/4/04'	ECN04439		CHECKED BY:	David	11/19-04'	.XX ±0.20/.008	.X' ±		FINISH:			
SYM	NAME	DATE	REVISIONS		APPROVED BY:	Alex	11/19-04'	.XXX ±0.08/.003	.XX' ±		DRAWING NO.	CJA901SG	PART NO.	CJA988**1**
											SCALE	2 / 1	SHEET	1 OF 1