


Materials:

- * Insulator: Polycarbonate UL 94V-2
- * Contact: Phosphor Bronze
- * Shield: Brass, Nickel plated
- △ * Available for stranded and solid wire conductor from AWG #24~#26

Ordering Code:

CJP2 88 3 1 0 R S
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
② Contacts: 88= 8P8C
③ Plating option:
2= Gold flash plated over 1.27μm(50μ") Nickel
3= 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
4= 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
5= 1.27μm(50μ") Gold plated over 1.27μm(50μ") Nickel
④ Latch style: 1= Standard
⑤ Insulator Color: 0= Nature(Clear)
⑥ Cable type: F= Flat-oval Cable
R= Round Cable
⑦ Other option: S= With Shield

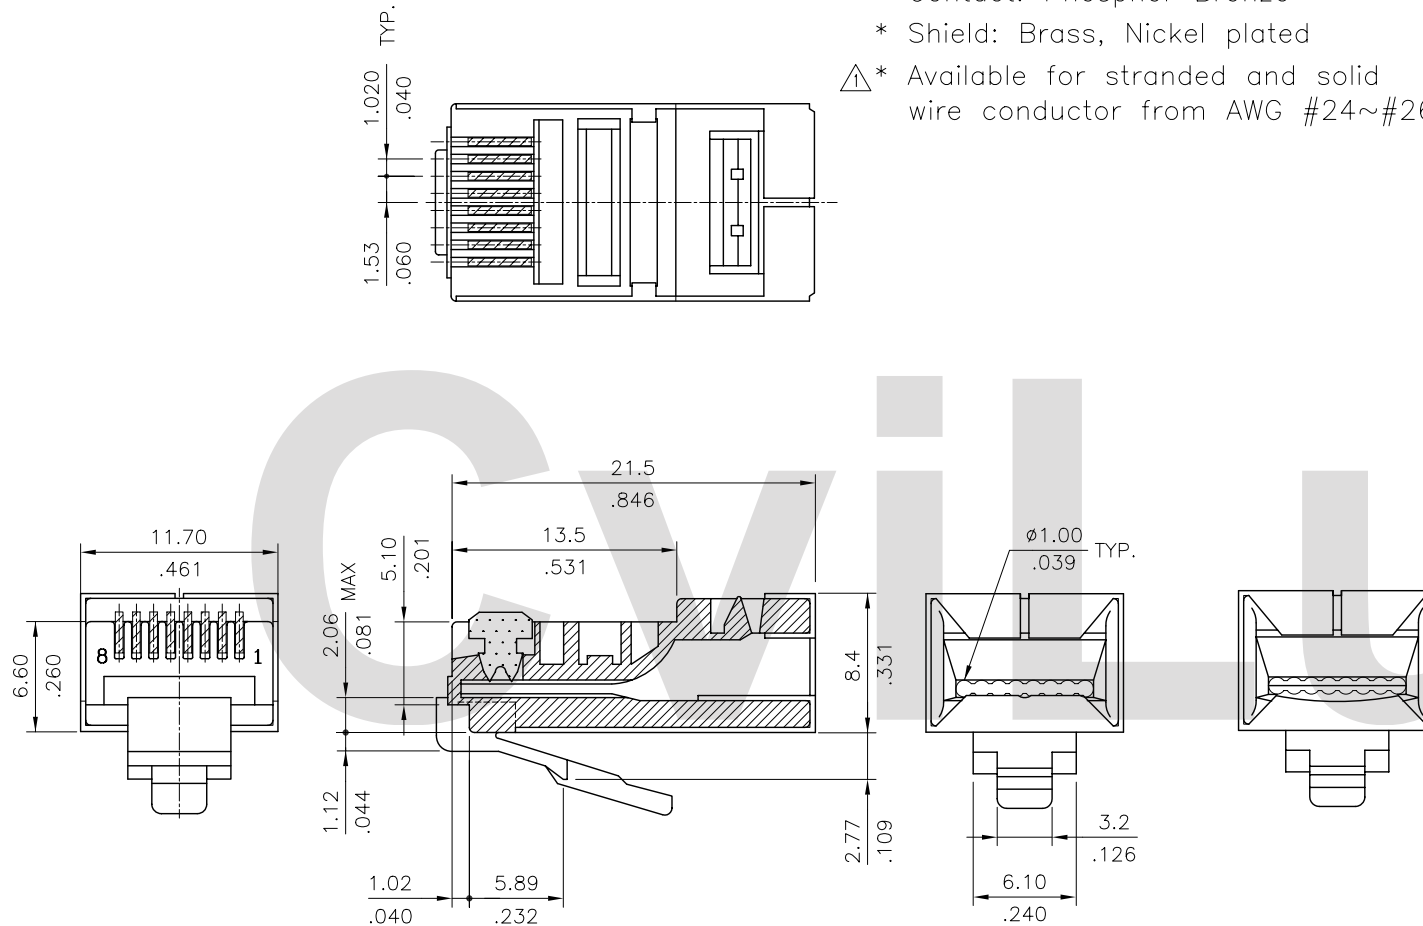

Flat-oval Cable
(P/N: CJP288*10FS)

Round Cable
(P/N: CJP288*10RS)

RoHS Compliant

△4					DATE	UNIT: mm / inch	TITLE: STANDARD 8 POSITION SHIELDED TYPE MODULAR PLUG	 瀚荃股份有限公司 CviLux Corporation			
△3					DRAWN BY: Sandy	4/4-07'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
△2					ENGINEER: Eisley	4/11-07'	.X ± 0.25/.010 X' ± 1'	DRAWING NO. CJP201SE PART NO. CJP288*10*S			
△1	Sandy	4/4-07'	ECN07134/ECR07051-0		CHECKED BY: Eisley	4/11-07'	.XX ± 0.15/.006 .X' ±				
SYM	NAME	DATE	REVISIONS		APPROVED BY: Alex	4/11-07'	.XXX ± 0.08/.003 .XX' ±	FINISH:			
									SCALE	2 / 1	SHEET 1 OF 1

CVILUX CORP.
2007.04.16
ISSUED