

Ordering Code:

CB72 ** * M 1 ** -*0
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② NO. of Circuits:
- ③ Plating code:
 - A= Selective Gold flash plated on contact and 1.27μm (50μ") Nickel underplating over all
 - C= Selective 0.76μm(30μ") Gold plated on contact and 1.27μm (50μ") Nickel underplating over all
 - D= Selective 0.25μm(10μ") Gold plated on contact and 1.27μm (50μ") Nickel underplating over all
- ④ M=SMT Type
- ⑤ Color: 1= Black
- ⑥ Options: 00= Standard; P0= With Pegs
- ⑦ Packing Options: T0= Tube Packing(6~ 80 Pin)
R0= Tape & Reel Packing(6~ 58 Pin)

DIM.D	pin
0.10	06~50P
0.12	52~80P

Material:


- * Insulation: Nylon 6T UL 94V-0
- * Contact: Phosphor Bronze

A = 2.54 * No. of Spaces

B = A + 2.54





C = A - 2.54

* Available in 6 through 80 circuits

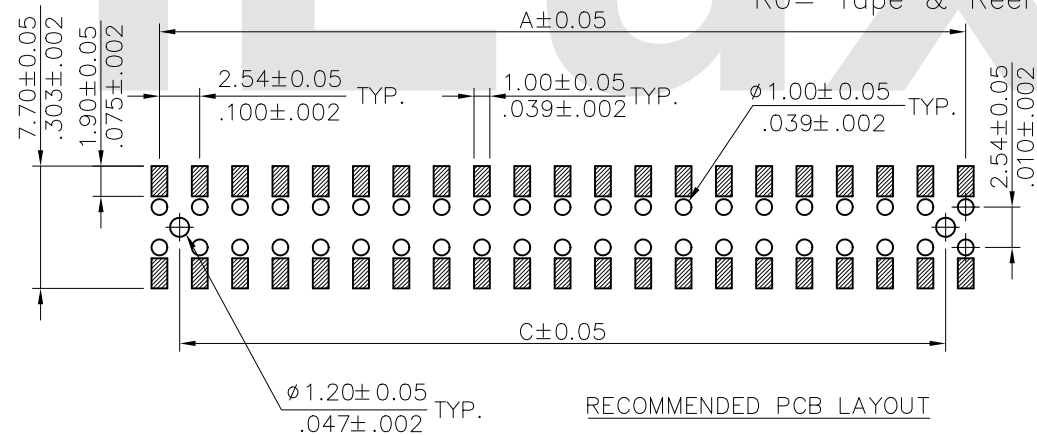

Lead Free Process
 RoHS Compliant


<table border="1"> <tr><td>4</td></tr> <tr><td>3</td></tr> <tr><td>2</td></tr> <tr><td>1</td></tr> </table>	4	3	2	1		<table border="1"> <tr><td>DATE</td><td></td></tr> <tr><td>DRAWN BY:</td><td>Sandy</td></tr> <tr><td>ENGINEER:</td><td>Sun</td></tr> <tr><td>CHECKED BY:</td><td>Eisley</td></tr> <tr><td>APPROVED BY:</td><td>Eisley</td></tr> </table>	DATE		DRAWN BY:	Sandy	ENGINEER:	Sun	CHECKED BY:	Eisley	APPROVED BY:	Eisley	<table border="1"> <tr><td>UNIT:</td><td>mm / inch</td></tr> <tr><td>TOLERANCE UNLESS OTHERWISE SPECIFIED</td><td></td></tr> <tr><td>.X ± 0.30/.012</td><td>X' ± 1'</td></tr> <tr><td>.XX ± 0.20/.008</td><td>X" ±</td></tr> <tr><td>.XXX ± 0.10/.004</td><td>.XX ±</td></tr> </table>	UNIT:	mm / inch	TOLERANCE UNLESS OTHERWISE SPECIFIED		.X ± 0.30/.012	X' ± 1'	.XX ± 0.20/.008	X" ±	.XXX ± 0.10/.004	.XX ±	<table border="1"> <tr><td>TITLE:</td><td>2.54MM(.100") SMT TYPE DUAL ROW CONNECTOR</td></tr> <tr><td>MATERIAL:</td><td></td></tr> <tr><td>FINISH:</td><td></td></tr> </table>	TITLE:	2.54MM(.100") SMT TYPE DUAL ROW CONNECTOR	MATERIAL:		FINISH:		<p>瀚荃股份有限公司 CviLux Corporation</p>	<table border="1"> <tr><td>DRAWING NO.</td><td>CB7202SA</td><td>PART NO.</td><td>CB72***M1**-T0 CB72***M1**-R0</td></tr> <tr><td>SCALE</td><td>4 / 1</td><td>SHEET</td><td>1 OF 2</td></tr> </table>	DRAWING NO.	CB7202SA	PART NO.	CB72***M1**-T0 CB72***M1**-R0	SCALE	4 / 1	SHEET	1 OF 2
	4																																											
	3																																											
	2																																											
1																																												
DATE																																												
DRAWN BY:	Sandy																																											
ENGINEER:	Sun																																											
CHECKED BY:	Eisley																																											
APPROVED BY:	Eisley																																											
UNIT:	mm / inch																																											
TOLERANCE UNLESS OTHERWISE SPECIFIED																																												
.X ± 0.30/.012	X' ± 1'																																											
.XX ± 0.20/.008	X" ±																																											
.XXX ± 0.10/.004	.XX ±																																											
TITLE:	2.54MM(.100") SMT TYPE DUAL ROW CONNECTOR																																											
MATERIAL:																																												
FINISH:																																												
DRAWING NO.	CB7202SA	PART NO.	CB72***M1**-T0 CB72***M1**-R0																																									
SCALE	4 / 1	SHEET	1 OF 2																																									
SYM	NAME	DATE	REVISIONS																																									

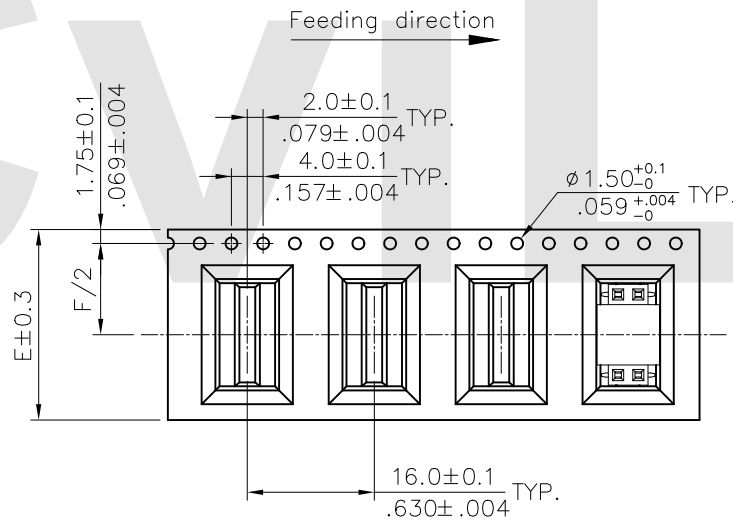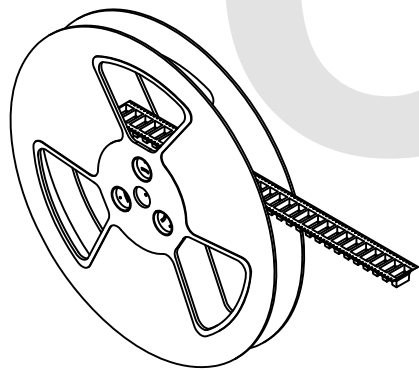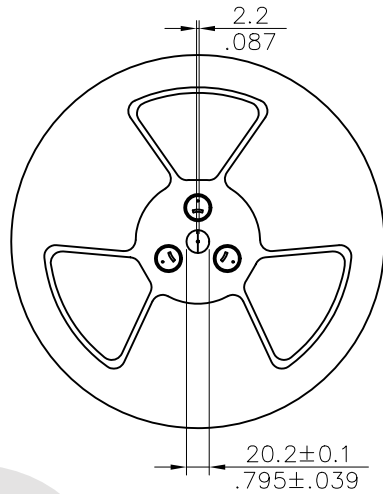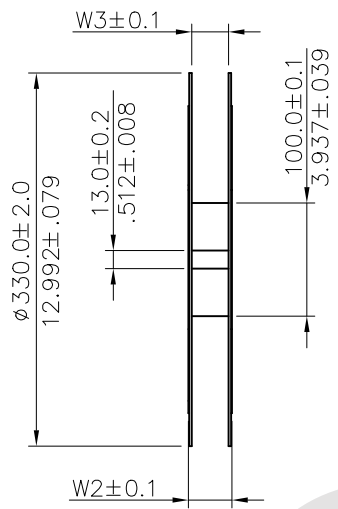

WIDTH : 24 mm Carrier

- NOTE:
 1. 10 sprocket hole pitch cumulative tolerance ± 0.2
 2. Carrier camber is 1mm in 100mm
 3. All dimensions meet EIA-481-2 requirements
 4. Quantity : 400 PCS/Reel

Circuits	Dimension			
	E	F	W2	W3
6-10	24.0(0.944)	23.00(0.906)	29.1(1.146)	24.5(0.965)
12-14	32.0(1.260)	28.40(1.118)	37.0(1.457)	32.5(1.280)
16-22	44.0(1.732)	40.40(1.591)	49.1(1.933)	44.5(1.752)
24-32	56.0(2.205)	52.40(2.063)	61.1(2.406)	56.5(2.224)
34-44	72.0(2.835)	68.40(2.693)	77.1(3.035)	72.5(2.854)
46-58	88.0(3.465)	84.40(3.323)	93.1(3.665)	88.5(3.484)

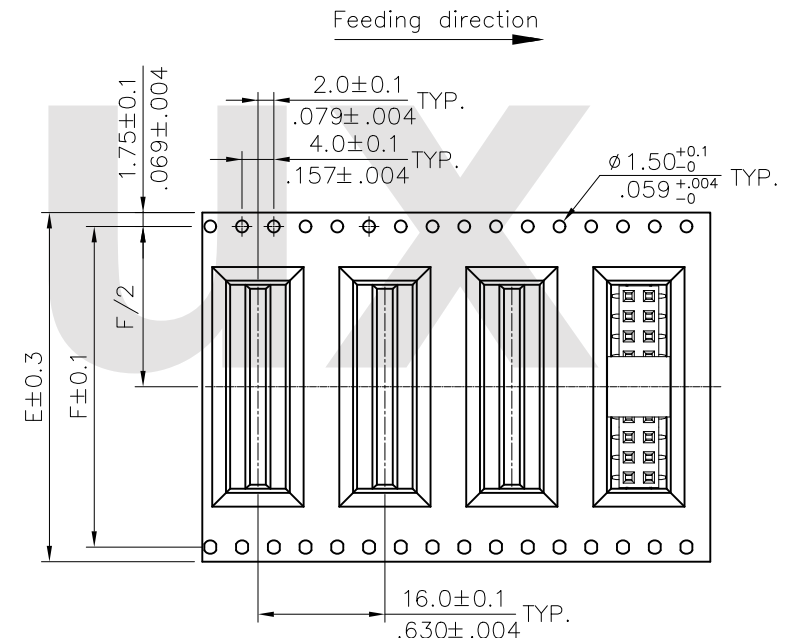

WIDTH : 32, 44, 56, 72, 88 mm Carrier

4								DATE	UNIT: mm / inch	TITLE: 2.54MM(.100") SMT TYPE DUAL ROW CONNECTOR	 瀚荃股份有限公司 CviLux Corporation	
3			DRAWN BY: Sandy		7/18-16'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:		DRAWING NO. CB7202SA PART NO. CB72***M1**-R0
2			ENGINEER: Sun		7/20-16'	X ±	X' ±			FINISH:		
1			CHECKED BY: Eisley		7/21-16'	XX ±	X ±					
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley	7/21-16'	XXX ±	XX ±				