







Note:

- * Insulation material: Nylon 66,
- * Panel mount version is for use with 0.80mm(.031") or 2.00mm(.079") thick panels
- * Panel should be punched in the direction of connector insertion

Ordering Code:

CP-01 ② ** 0 * S
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Type of Connector: 2= Plug
- ③ No of Circuits:
- ④ Plating Code: 0= Non plating
- ⑤ Variation: F= UL 94V-2 WITH EARS (Glow wire available)
E= UL 94V-2 WITHOUT EARS (Glow wire available)
- ⑥ Option: S= Single Row

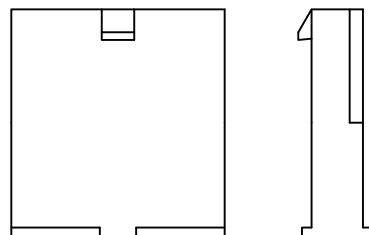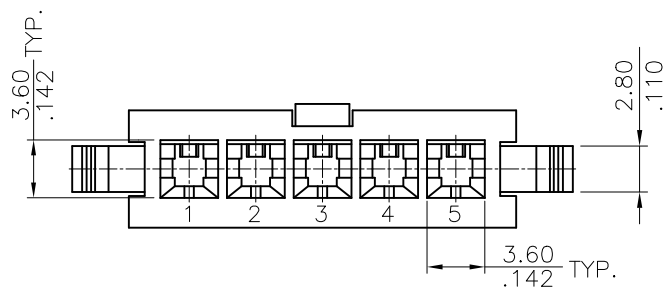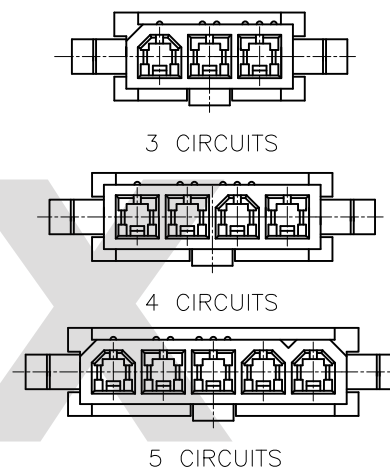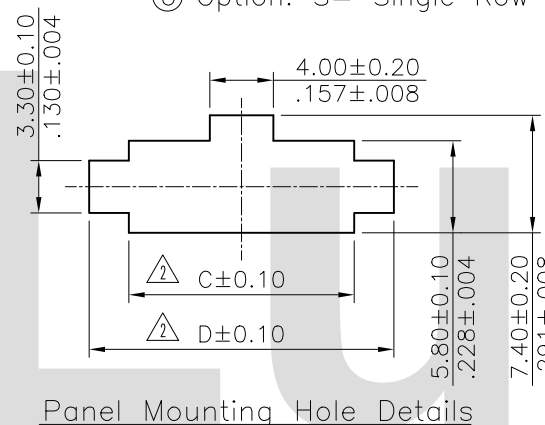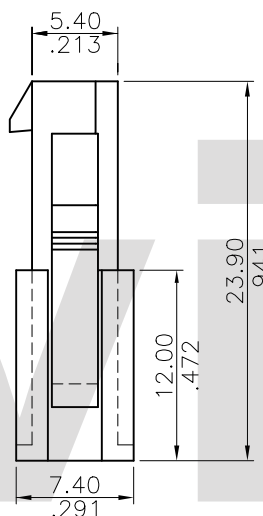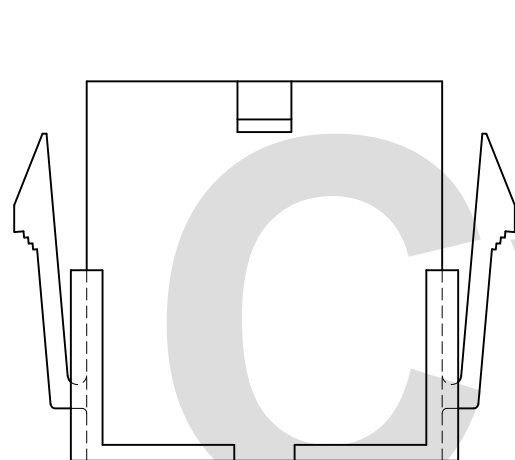

WITHOUT EARS

CIRCUIT PATTERN SCHEDULE

Circuits	Dimension			
	A	B	△ C	△ D
3	8.40(.331)	13.9(.547)	14.2(.559)	19.2(.756)
4	12.60(.496)	18.1(.713)	18.4(.724)	23.4(.921)
5	16.80(.661)	22.3(.878)	22.6(.890)	27.6(1.087)

RoHS Compliant

CIVILUX CORP
2014.02.14
ISSUED

SYM	NAME	DATE	REVISIONS	APPROVED BY:	DATE	UNIT: mm / inch	TOLERANCE UNLESS OTHERWISE SPECIFIED
△4							
△3							
△2	Karen	1/29-14'	ECNT114018	ENGINEER:	Karen	1/29-14'	.X ± 0.38/.015 X' ± 1'
△1	Eisley	7/24/08"	ECN08350	CHECKED BY:	Sun	2/05-14'	.XX ± 0.25/.010 .X' ±
				APPROVED BY:	Eisley	2/06-14'	.XXX ± 0.10/.004 .XX' ±

TITLE:	4.20mm PITCH PLUG CONN. (SINGLE ROW)
MATERIAL:	
FINISH:	

瀚荃股份有限公司 CviLux Corporation			
DRAWING NO.	CP0146AC	PART NO.	CP-012**0*S
SCALE	2 / 1	SHEET	1 OF 1