Material & Finish :

* Insulation: Nylon 66 , Color Nature
* Contact: Brass

Circuits	Dimension	
	A	B
4	4.20(.165)	15.2(.598)
6	8.40(.331)	19.4(.764)
10	16.80(.661)	27.8(1.094)
14	25.20(.992)	36.2(1.425)
18	33.60(1.323)	44.6(1.756)
24	46.20(1.819)	57.2(2.252)

Ordering Code:

CP-01 ① 4 ② ** ③ * ④ H ⑤ 0 ⑥

① Series No.
② Type of Connector:
4= Right angle PCB mount header
③ No of Circuits:
④ Plating Code: 1= Tin over Nickel
2= Gold flash plated over Nickel
3= 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
4= 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
⑤ Variation: H= UL 94V-2, BMI type (Glow wire available)
⑥ Option: 0= Standard

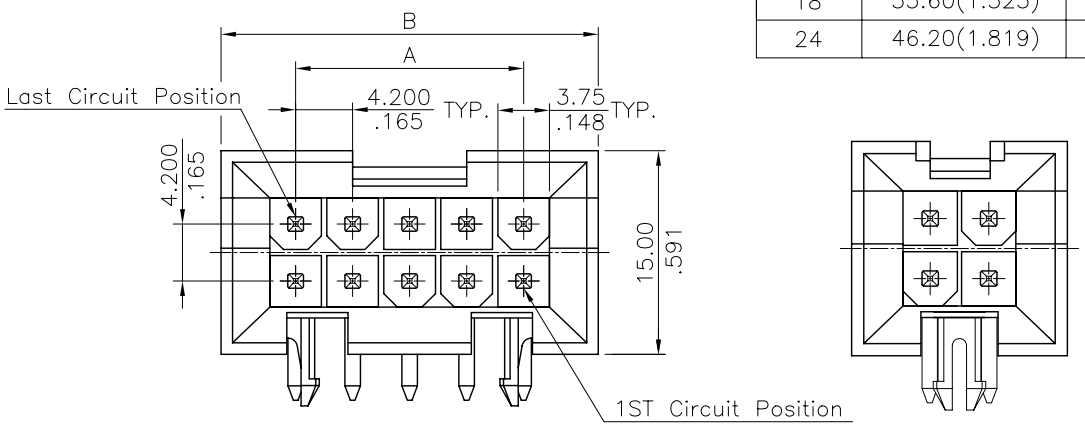

4 CIRCUITS
P/N:CP-01404**0

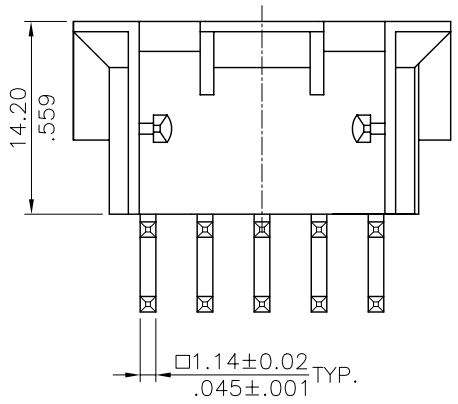

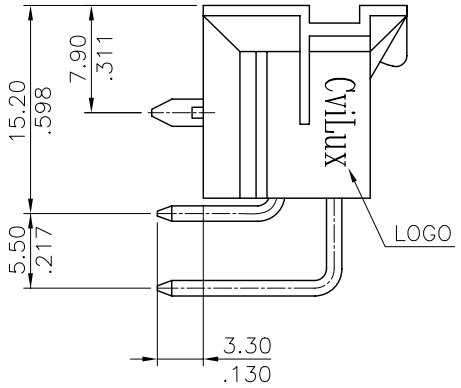

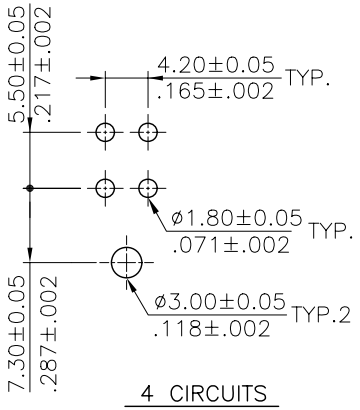

4 CIRCUITS

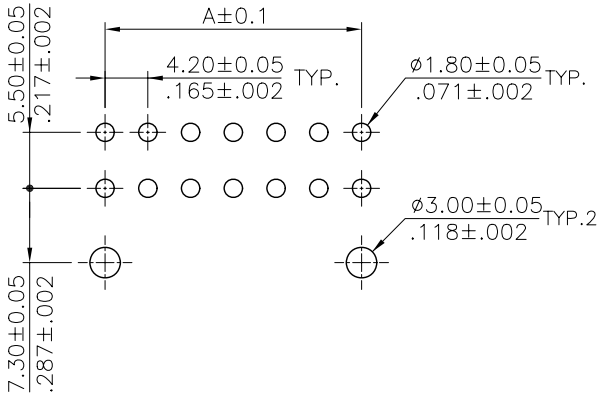

Recommended P.C. Board layout

RoHS Compliant

SYM	NAME	DATE	REVISIONS			DATE
4			CVILUX CORP. 2007.07.10 ISSUED			
3				DRAWN BY:	Sandy	7/06-07'
2				ENGINEER:	Eisley	7/06-07'
1				CHECKED BY:	David	7/06-07'
				APPROVED BY:	David	7/06-07'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ± 0.38/.015	X.° ± 1°
.XX ± 0.25/.010	.X° ±
.XXX ± 0.10/.004	.XX° ±

TITLE: CP-014 SERIES BMI RIGHT ANGLE TYPE CONN.

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CP0152AA	PART NO.	CP-014***H0
SCALE	2 / 1	SHEET	1 OF 1