




Note:

- * Insulation material: Nylon 66, Color Nature
- * Panel mount version is for use with 0.80mm(.031") or 2.00mm(.079") thick panels
- * Panel should be punched in the direction of connector insertion



Ordering Code:

CP-01 ① ② ** ③ ④ ⑤ * ⑥ S

- ① Series No.
- ② Type of Connector: 2= Plug
- ③ No of Circuits:
- ④ Plating Code: 0= Non plating
- ⑤ Variation: 0= UL 94V-2 WITH EARS
2= UL 94V-0 WITH EARS
1= UL 94V-2 WITHOUT EARS
3= UL 94V-0 WITHOUT EARS
- ⑥ Option: S= Single Row

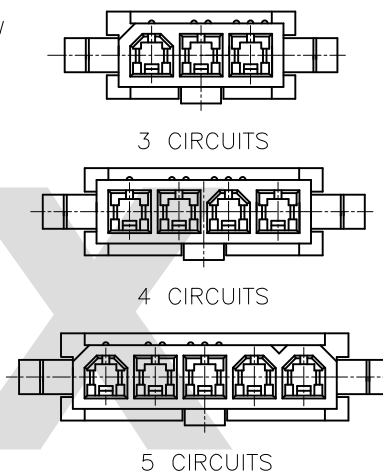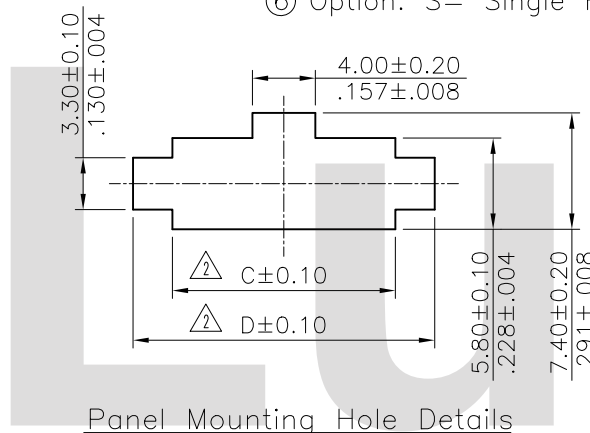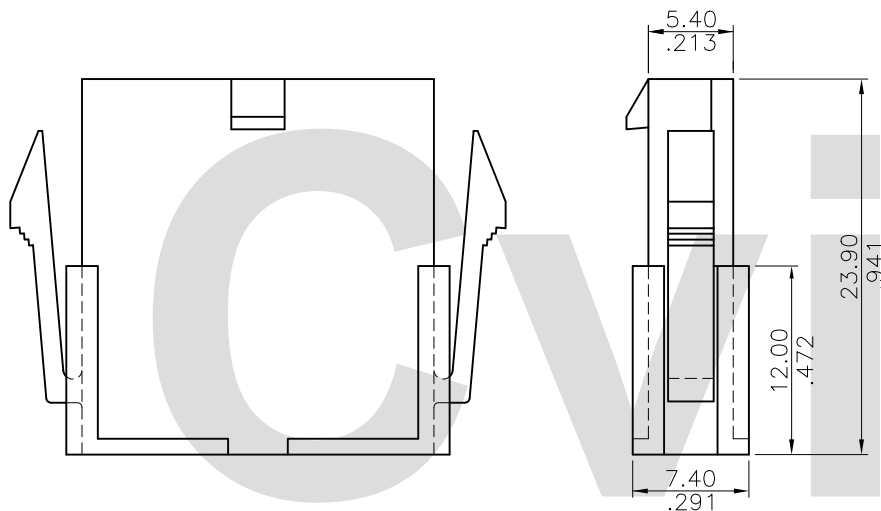

CIRCUIT PATTERN SCHEDULE

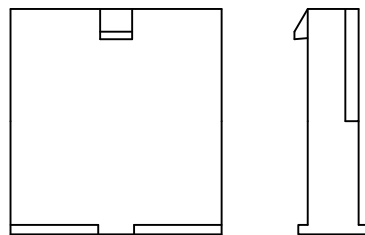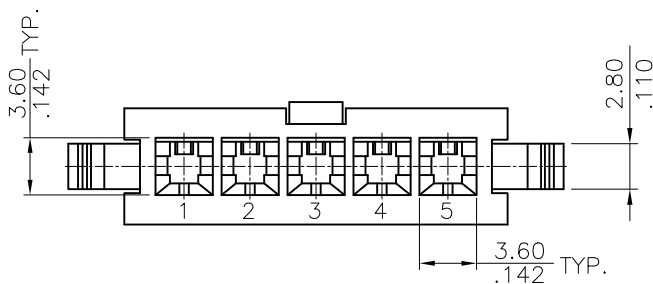

WITHOUT EARS

Circuits	Dimension			
	A	B	△ C	△ D
3	8.40(.331)	13.9(.547)	14.2(.559)	19.2(.756)
4	12.60(.496)	18.1(.713)	18.4(.724)	23.4(.921)
5	16.80(.661)	22.3(.878)	22.6(.890)	27.6(1.087)

RoHS Compliant

SYM	NAME	DATE	REVISIONS	APPROVED BY:	DATE	UNIT: mm / inch	TITLE: 4.20mm PICH PLUG CONN. (SINGLE ROW)	CviLux Corporation				
④								瀚荃股份有限公司 CviLux Corporation				
③												
②	Karen	1/29-14'	ECNT114018	ENGINEER:	Karen Sun	1/29-14'		MATERIAL:	DRAWING NO.	CP0179SC	PART NO.	CP-012**0*S
①	Eisley	7/24/08"	ECN08350	CHECKED BY:	Eisley	2/06-14'			FINISH:	SCALE	2 / 1	SHEET
				APPROVED BY:	Eisley	2/06-14'						

CVILUX CORP
 2014.02.14
 ISSUED