

Circuits	Dim.A	Dim.B
2	4.00(.157)	9.8(.386)
3	8.00(.315)	13.8(.543)
4	12.00(.472)	17.8(.701)
5	16.00(.630)	21.8(.858)



Material:

Insulator: Nylon 66 UL 94V-0

Ordering Code:

CP04 03 S L0 0 0  
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Circuits: 2,3,4,5 PIN
- ③ S= Connector Housing
- ④ L0= With Latch Type
- △⑤ Color option: 0= Color White(Nature)  
9= Color Gray
- ⑥ Other option: 0= Standard

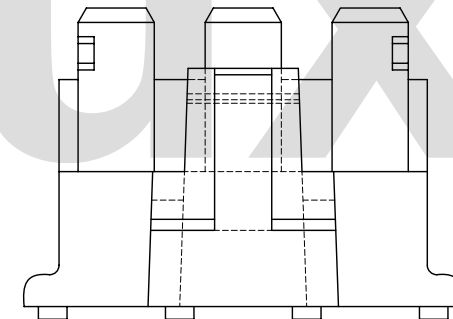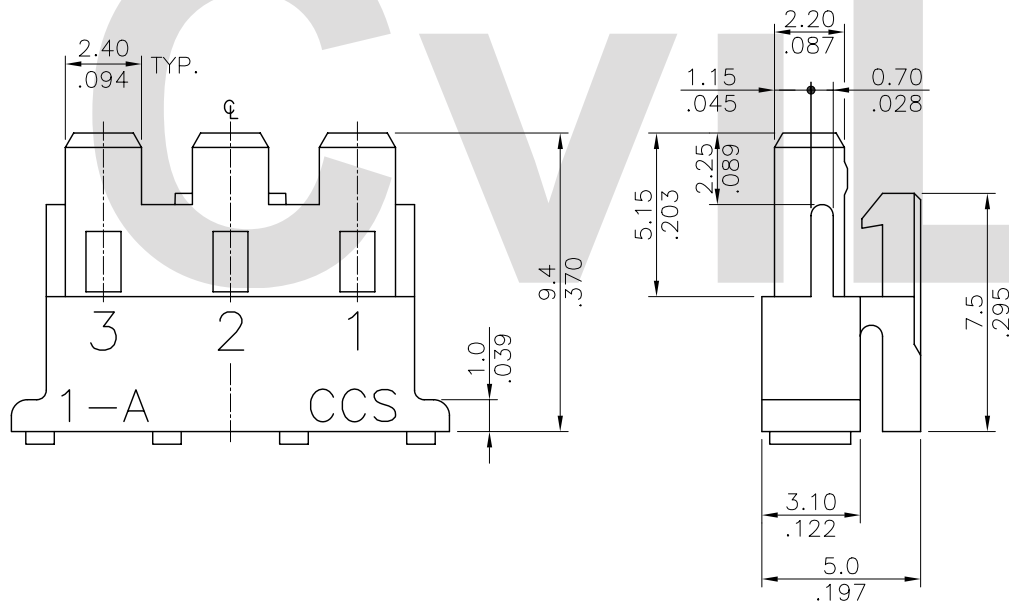

BACK VIEW

RoHS Compliant



SYM	NAME	DATE	REVISIONS	APPROVED BY:	DATE	UNIT: mm / inch	TITLE:	CviLux Corporation			
4							4.0mm PITCH HOUSING	瀚荃股份有限公司 CviLux Corporation			
3				DRAWN BY: Jim	1/8 07'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
2	Jim	1/5 07'	ECN07009	ENGINEER: Eisley	1/8 07'	.X ± 0.30/.012 X' ± r'	MATERIAL:	DRAWING NO.	CP0420SC	PART NO.	CP04**SLO*0
1	Clark	08/09-06	ECN06283	CHECKED BY: David	1/8 07'	.XX ± 0.20/.008 .X' ±	FINISH:	SCALE	4 / 1	SHEET	1 OF 1
				APPROVED BY: Alex	1/8 07'	.XXX ± 0.10/.004 .XX' ±					