


Material: Nylon 66 UL 94V-0 Color Nature




| P/N | DIM. A | DIM. B | DIM. C | DIM. D |
|-------------|------------|------------|------------|------------|
| CP042BSB000 | 8.0(.315) | 16.2(.638) | 11.6(.457) | 10.4(.409) |
| CP042CSB000 | 12.0(.472) | 20.2(.795) | 15.6(.614) | 14.4(.472) |
| CP042DSB000 | 16.0(.630) | 24.2(.953) | 19.6(.772) | 18.4(.724) |
| CP042ESB000 | 13.0(.512) | 21.2(.835) | 16.6(.654) | 15.4(.606) |

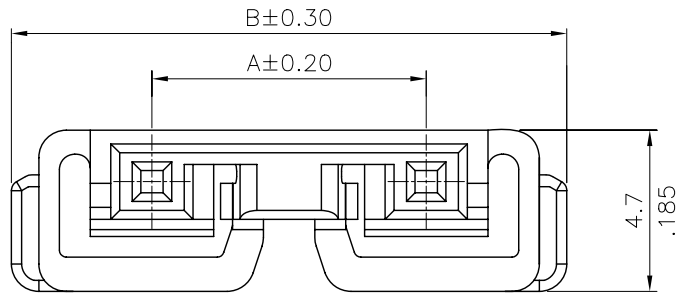

Ordering Code:

CP04 2B S B0 0 0
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Circuits: 2 PIN
 B=8.0mm , C=12.0mm
 D=16.0mm , E=13.0mm
- ③ S= Connector Housing
- ④ B0= With Latch Type B
- ⑤ Color option: 0= Color White(Nature)
- ⑥ Other option: 0= Standard

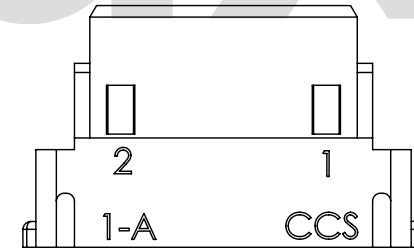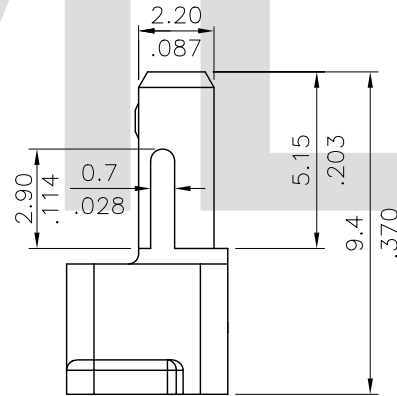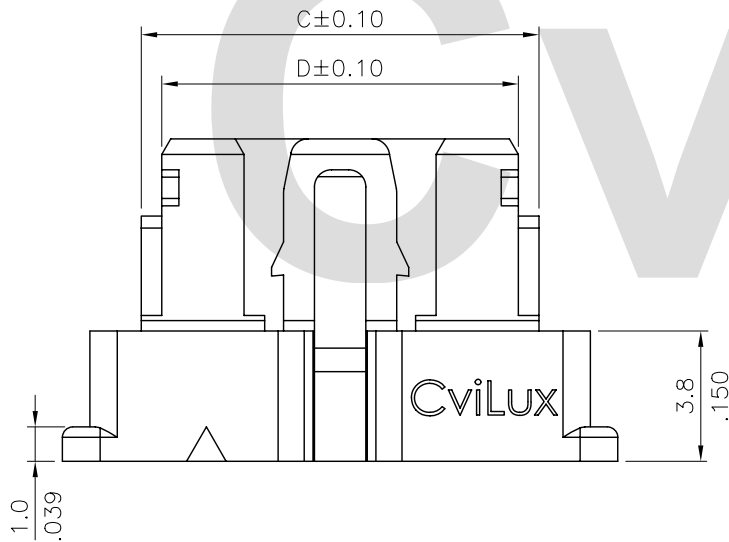

Back View Scale 3/1

RoHS Compliant

| | | | | | | | |
|------------------|---|--|-----------|--------------------------------------|---------------------------|--------------------------------|----------------------|
| 4 3 2 1 | CVILUX CORP. 2006.10.17 ISSUED | DRAWN BY: Eisley ENGINEER: Eisley CHECKED BY: David APPROVED BY: Alex | DATE | UNIT: mm / inch | TITLE: | 瀚荃股份有限公司 CviLux Corporation | |
| | | | 09/22-06' | TOLERANCE UNLESS OTHERWISE SPECIFIED | CP04 HOUSING(Lock B Type) | | |
| | | | 09/22-06' | .X ± 0.30/.012 X.* ± r | MATERIAL: | | |
| | | | 09/22-06' | .XX ± 0.20/.008 .X.* ± | FINISH: | | |
| SYM | NAME | DATE | REVISIONS | 09/22-06' | .XXX ± 0.10/.004 .XX.* ± | DRAWING NO. CP0431SA | PART NO. CP04**SB000 |
| | | | SCALE | 4 / 1 | SHEET 1 OF 1 | | |