


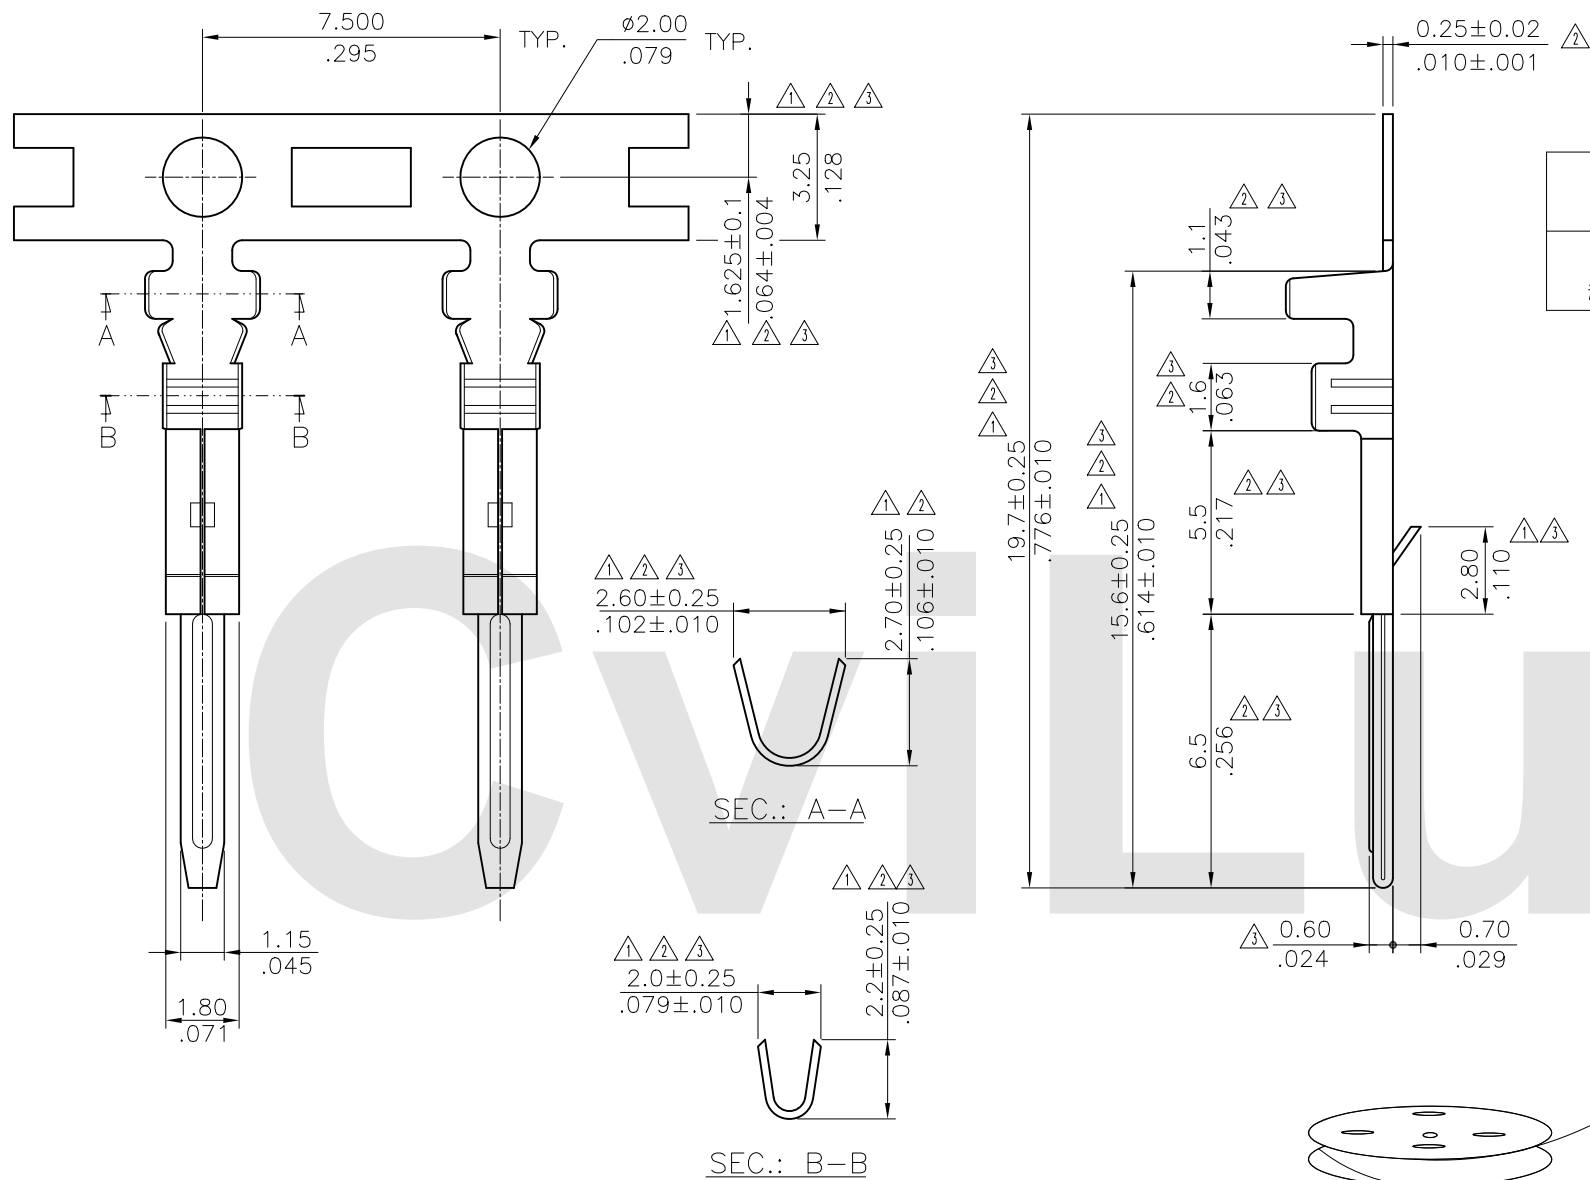


Wire Range	Insulation Diameter	Reel Q'ty
AWG #22~#28	1.70 (.067) MAX.	7000 PCS.

Ordering Code:

CP06 T02 1 B E P
① ② ③ ④ ⑤ ⑥

- ① Series No.
② Accept wire gage:
T02= AWG#22 ~ #28
③ Plating code:
1= 2.03 μm (80 μ) Min. Tin over
0.76 μm (30 μ) Nickel
④ Material: B= Brass
⑤ Plating method: E= Pre-tinned
⑥ Style: P= Plug terminal

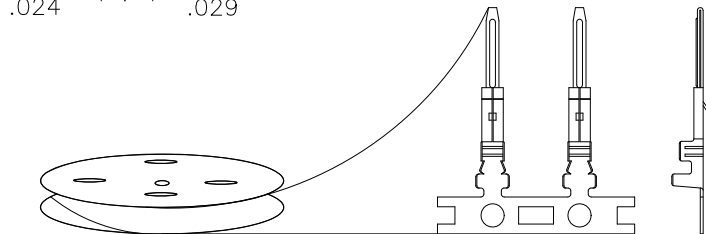

④ PULL OUT DIRECTION(PLATED)

RoHS Compliant

④	Karen	6/17-15'	ECNT115140/ECRT115017	CVILUX CORP 2015.07.02 ISSUED			DATE	UNIT: mm / inch		TITLE: CRIMP TERMINAL	 瀚荃股份有限公司 CviLux Corporation	
③	SUN	12/14/05	ECR05122-0/ECN05435		DRAWN BY:	Karen	6/22-15'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:
②	SUN	5/12/05	ECR05043-0/ECN05168		ENGINEER:	Sun	6/23-15'	.X ± 0.20/.008	X' ± 1'	FINISH:		
①	SUN	10/11/04	ECR04090-0/ECN04393		CHECKED BY:	Eisley	6/23-15'	.XX ± 0.10/.004	X' ±			
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	6/23-15'	.XXX ± 0.05/.002	.XX' ±			DRAWING NO. CP0605SH	PART NO. CP06T021BEP
											SCALE 5 / 1	SHEET 1 OF 1