





2 CIRCUITS



3 CIRCUITS





4 CIRCUITS

\* Material: Nylon 66 UL 94V-0  
Color Nature



Ordering Code:

CP11 \*\* S 0000  
① ② ③ ④



- ① Series No.
- ② Contacts: No of Circuits
- ③ Contact type: S= Receptacle
- ④ Other option: 0000= Standard





4 CIRCUITS  
(P/N: CP1104S000A)



6 CIRCUITS

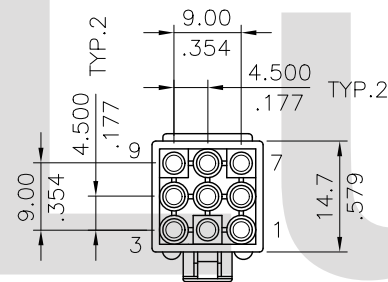

9 CIRCUITS

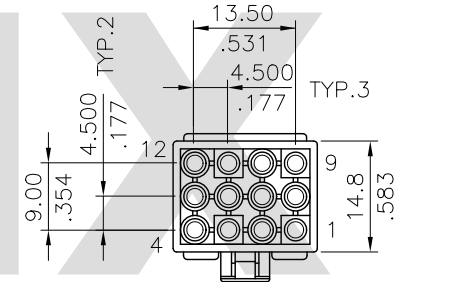

12 CIRCUITS

④				 <b>2010.11.30</b> <b>ISSUED</b>		DATE	UNIT: mm / inch	TITLE:	 瀚荃股份有限公司 CviLux Corporation	
③	Una	11/11-10'	ECN10365		DRAWN BY:	Una	11/11-10'	TOLERANCE		WIRE TO WIRE POWER CONNECTOR
②	Sun	9/22-09'	ECR09122-0/ECN09457		ENGINEER:	Clark	11/17-10'	UNLESS OTHERWISE SPECIFIED		MATERIAL:
①	Bill	12/06-07	ECR07140-0/ECN07385		CHECKED BY:	David	11/17-10'	.X ± 0.30/.012 X.* ± 1"		FINISH:
SYM	NAME	DATE	REVISIONS		APPROVED BY:	David	11/17-10'	.XX ± 0.20/.008 X.* ±		
							.XXX ± 0.10/.004 XX.* ±		DRAWING NO. CP1102SF PART NO. CP11**S0000 SCALE 1 / 1 SHEET 1 OF 1	