


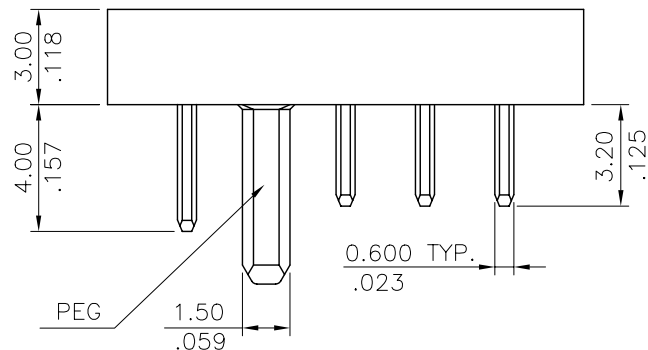

Circuits	Dimension	
	A	B
3	7.50(.295)	12.5(.492)
4	10.0(.393)	15.0(.590)
5	12.5(.492)	17.5(.688)
6	15.0(.590)	20.0(.787)

Material:

* Insulation: High temperature plastic
UL 94V-0 Color Black

* Contact: 0.60t Copper alloy

Ordering Code:

CP20 04 P 9 H 1 A
① ② ③ ④ ⑤ ⑥ ⑦

① Series No.

② No. of Circuits: 3 to 6




③ P= PLUG

④ Plating: 9= 5μ" Min. Gold over
80μ" Nickel

⑤ Type: H= Right Angle

⑥ Color: 1= Black

⑦ Other option: A= With Peg

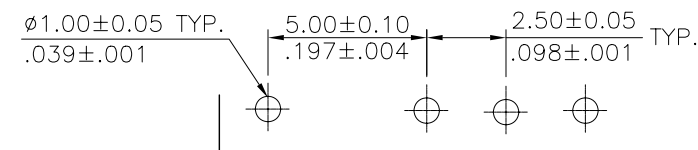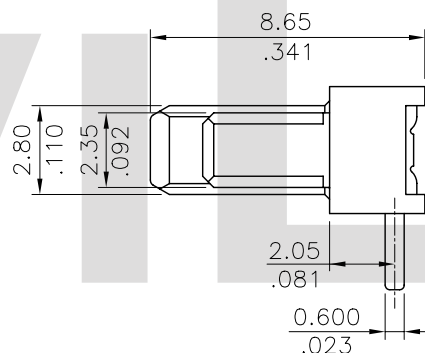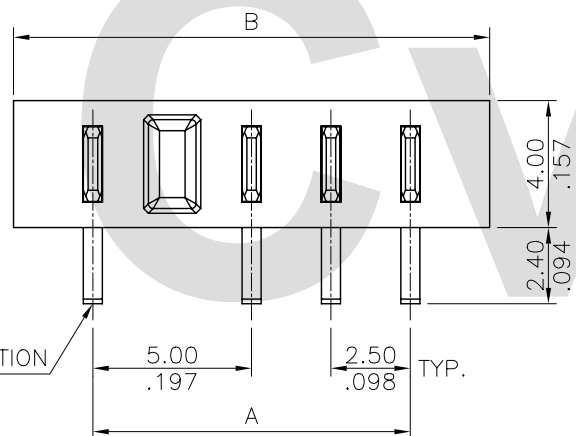

Recommended P.C Board Layout

4				CVILUX CORP. 2005.02.22 ISSUED			DATE	UNIT: mm / inch	TITLE: 2.50(.098)MM PITCH BATTERY MALE CONNECTOR (A TYPE)	瀚荃股份有限公司 CviLux Corporation				
3					DRAWN BY:	Lynn	02/15-05'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
2					ENGINEER:	Eisley	02/21-05'	.X ± 0.30/.012	X' ± 1"		MATERIAL:			
1	LYNN	02/15-05	ECN04520		CHECKED BY:	David	02/21-05'	.XX ± 0.20/.008	X" ±		CUSTOMER:	DRAWING NO.	CP2001SA	PART NO.
Sym	NAME	DATE	REVISIONS		APPROVED BY:	Alex	02/21-05'	.XXX ± 0.10/.004	XX' ±		SCALE	4 / 1	SHEET	1 OF 1