

Circuits	Dimension			
	A	B	C	D
4	7.50(.295)	11.5(.453)	10.50(.413)	14.5(.571)
5	10.0(.394)	14.0(.551)	13.00(.512)	17.0(.669)
6	12.5(.492)	16.5(.650)	15.50(.610)	19.5(.768)
7	15.0(.591)	19.0(.748)	18.00(.706)	22.0(.866)


Material:

- * Insulation: High temperature plastic
UL 94V-0 Color Black
- * Contact: 0.20t Copper alloy


Ordering Code:


CP20 ** S 9 V 1 B
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② No. of Circuits: 4 to 7
- ③ S= Receptacle
- ④ Plating: 9= 5μ" Min. Gold over 80μ" Nickel
- ⑤ Type: V= Straight
- ⑥ Color: 1= Black
- ⑦ Other option: B= Without hole

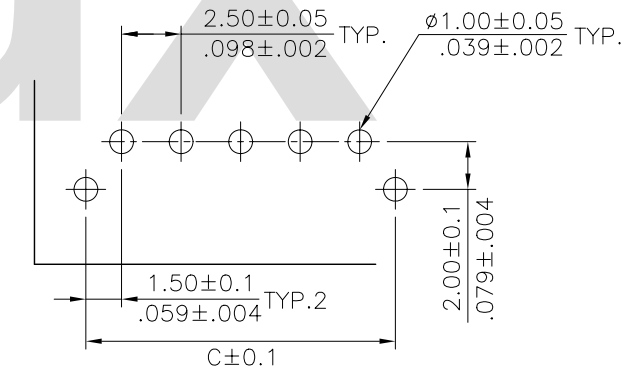

Recommended P.C Board Layout

④					DATE	UNIT: mm / inch	TITLE: 2.50(.098)MM PITCH BATTERY FEMALE CONNECTOR	 瀚荃股份有限公司 CviLux Corporation
③					DRAWN BY: Lynn	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
②					ENGINEER: Eisley	.X ± 0.30/.012 X' ± 1'	CUSTOMER:	DRAWING NO. CP2004SA PART NO. CP20**S*V1B
①	LYNN	02/15-05	ECN04520		CHECKED BY: David	.XX ± 0.20/.008 X' ±		SCALE 3 / 1 SHEET 1 OF 1
SYM	NAME	DATE	REVISIONS		APPROVED BY: Alex	.XXX ± 0.10/.004 .XX' ±		


 CVILUX CORP
 2005.02.22
 ISSUED