


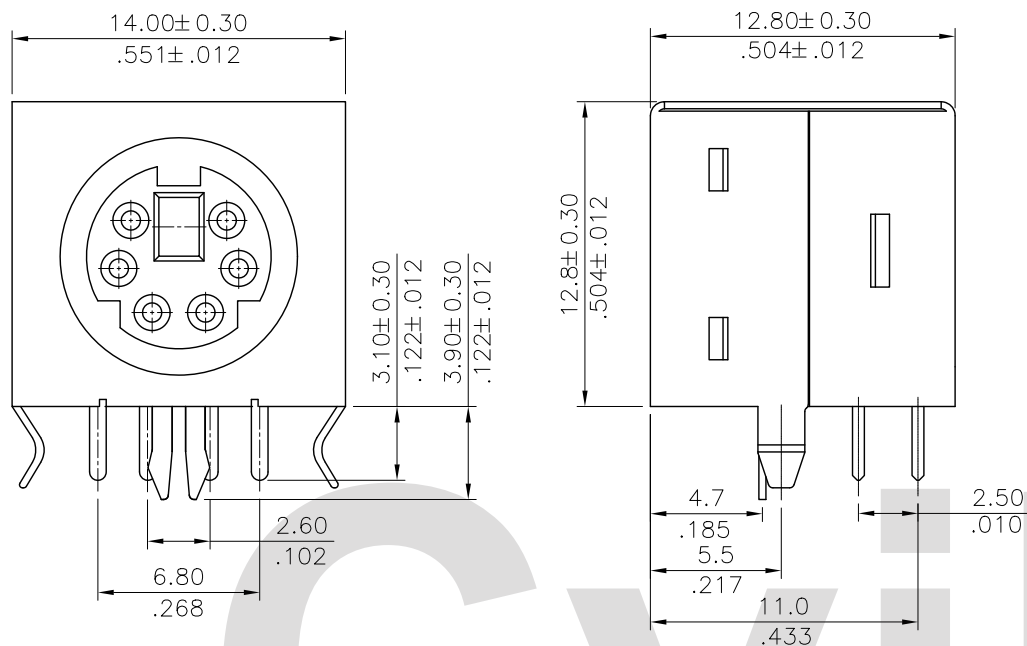

Materials :

- * Insulator: Glass filled polyester UL 94V-0
- * Contact: Brass
- * Shell: Copper Alloy with 50~80μ" Nickel over 50μ" Cu
- * Solder tail plating : Tin plated over Nickel

Ordering Code

CE54 06 S A 6 K0-C

① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Contacts: 03~08 Circuits
- ③ Connector type: S=Receptacle
- ④ Contact area plating:
A=Selective Gold flash plated over 1.27μm(50μ") Nickel
B=Selective 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
C=Selective 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
- ⑤ Color code:1=Black, 6=Green, 8=Purple
- ⑥ Other option: K0-C=With grounding pegs

Circuits	3	4	5	6	7	8
Arrangement of Contact						
P.C Board Layout						
Tolerance .X ±0.10/.004 .XX ±0.05/.002						

Lead Free Process

RoHS Compliant

4	3	2	1	DATE	UNIT: mm / inch	TITLE:	瀚荃股份有限公司 CviLux Corporation			
				DRAWN BY: Enya	2/8-13'	SOCKET WITH PEGS				
				ENGINEER: Eisley	2/8-13'	MATERIAL:				
				CHECKED BY: Eisley	2/8-13'	FINISH:				
SYM	NAME	DATE	REVISIONS	APPROVED BY: David	2/8-13'		DRAWING NO.	CE5406SB	PART NO.	CE54**S**K0-C
							SCALE	3 / 1	SHEET	1 OF 1

CIVILUX CORP
2013.02.20
ISSUED