


| Part No. | Wire Range | Insulation Diameter | Reel Q'ty |
|-------------|-------------|---------------------|------------|
| CP31T031BES | AWG #20~#24 | 2.48 (.098) MAX. | 5,000 PCS. |
| CP31T041BES | AWG #16~#20 | 3.30 (.130) MAX. | 3,500 PCS. |


Ordering Code:

CP31 T0* 1 B E S
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Accept wire gage:
 T03= AWG #20 ~ #24
 T04= AWG #16 ~ #20
- ③ Plating code:
 1= 2.03μm(80μ") Tin over 0.76μm(30μ") Nickel
- ④ Material : B= Brass
- ⑤ Plating method: E= Pre-tinned
- ⑥ Style: S= Receptacle terminal

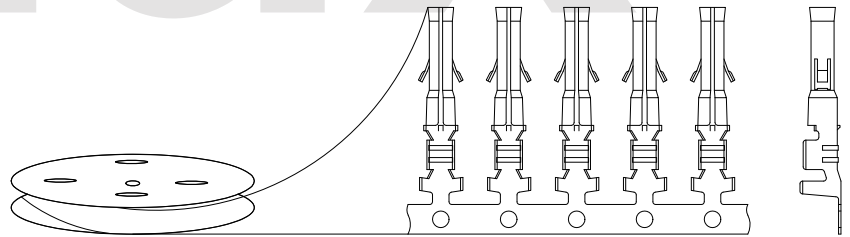

② PULL OUT DIRECTION(PLATED)

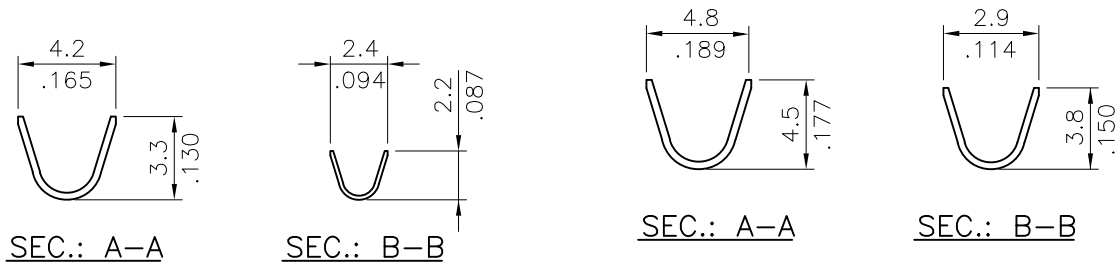

SEC.: A-A
 SEC.: B-B
 (P/N: CP31T031BES)

SEC.: A-A
 SEC.: B-B
 (P/N: CP31T041BES)

RoHS Compliant

| SYM | NAME | DATE | REVISIONS | APPROVED BY: | DATE | UNIT: mm / inch | TITLE: | CviLux Corporation | | | |
|-----|-------|----------|-----------------------|--------------|--------|---|---------------------|--------------------------------|-------|-------|--------|
| ④ | | | | | | UNIT: mm / inch | CRIMP CLIP TERMINAL | 瀚荃股份有限公司 CviLux Corporation | | | |
| ③ | | | | | | TOLERANCE UNLESS OTHERWISE SPECIFIED | MATERIAL: | | | | |
| ② | Karen | 6/13-15' | ECNT115140/ECRT115017 | CHECKED BY: | Eisley | .X ± 0.20/.008 | | SCALE | 3 / 1 | SHEET | 1 OF 1 |
| ① | Casey | 6/17/04' | ECN04237 | CHECKED BY: | Eisley | .XX ± 0.10/.004 | | | | | |
| | | | | APPROVED BY: | Eisley | .XXX ± 0.05/.002 | | | | | |

CVILUX CORP
2015.07.02
ISSUED