Material :
* Insulation : Nylon 66 UL 94V-2
* Contact : Pre-tinned Brass

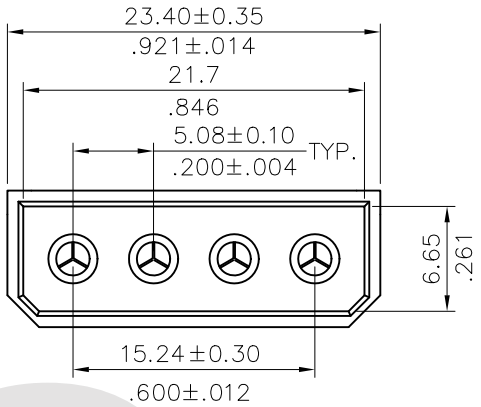

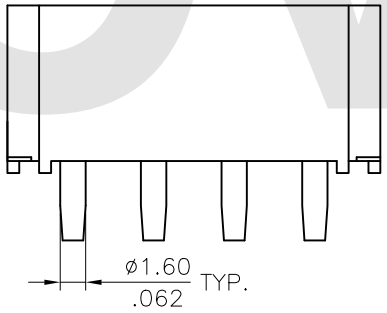

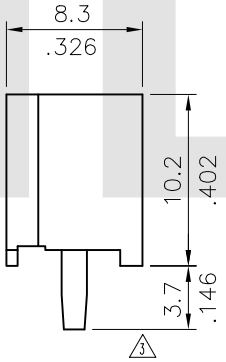

Ordering Code:

CP33 ① 04 ② P ③ 1 ④ V ⑤ 00 ⑥

① Series No.
② No. of Circuite: 4 Circuits
③ Concact type: P= Male
④ Contact plated:
1= Tin over 1.27μm (50μ") Nickel
⑤ Tail style: V= Straight
⑥ Option: 00=Color Nature (Standard)
10=Color Black

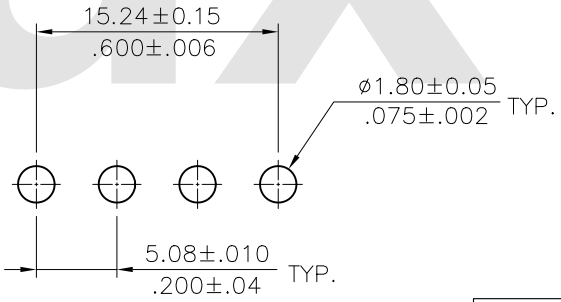

Recommended P.C Board layout

Tin-Lead Process

RoHS Compliant

CVILUX CORP
2016.02.18
ISSUED

SYM	NAME	DATE	REVISIONS
4			
3	Karen	2/01-16'	ECNT116018/ECRT116003
2	Jim	12/20/06'	ECR06113-0/ECN06475
1	SUN	4/30/04'	ECN04150

		DATE
DRAWN BY:	Karen	2/2-16'
ENGINEER:	Sun	2/3-16'
CHECKED BY:	Eisley	2/4-16'
APPROVED BY:	Eisley	2/4-16'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ± 0.25 / .010	X.° ± 3°
.XX ± 0.15 / .006	.X° ±
.XXX ± 0.08 ± .003	.XX° ±

TITLE: 5.08MM(.200") STRAIGHT POWER HEADER CONNECTORS

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CP3302SF	PART NO.	CP3304P1V**
SCALE	2 / 1	SHEET	1 OF 1