


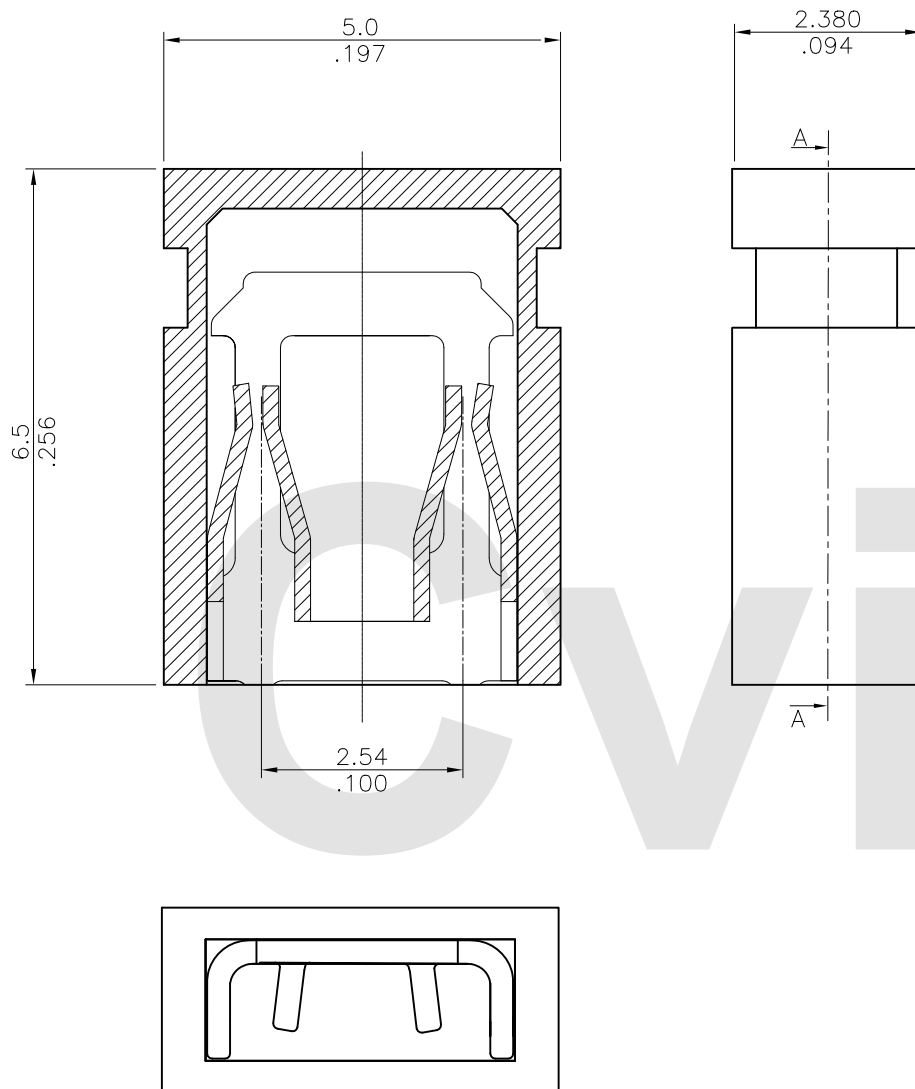

Material:

* Insulation: PBT, UL 94V-0

△ * Contact: Brass

△ Ordering Code:

CS0163 2 A 1 00
① ② ③ ④ ⑤

① Series No.

② Plating option:

1= 3.05μm(120μ") Min. Tin
over 0.76μm(30μ") Nickel

2= Gold flash plated over
1.27μm(50μ") Nickel

③ Contact type:

A= Closed ead

④ Color code:

1= Black, 2= Brown

3= Red, 7= Blue

⑤ Option:

00= Standard



RoHS Compliant

△6	Karen	9/03-15'	ECNT115201/ECRT115071		DATE	UNIT: mm / inch	TITLE: 2.54MM(.100") CLOSED TOP SHUNT	 瀚荃股份有限公司 CviLux Corporation			
△5	Sun	7/10-14'	ECRB114040/ECNT114127	DRAWN BY:	Karen	9/03-15'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
△4	Enya	5/8-13'	ECR13036-0/ECN13103-0	ENGINEER:	Sun	9/04-15'	.X ± 0.35 / .010 X" ± 1"	DRAWING NO. CS0105SG PART NO. CS0163*A*00			
△3	Sandy	5/5/09'	ECN09224	CHECKED BY:	Eisley	9/04-15'	.XX ± 0.20 / .008 .X" ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	9/04-15'	.XXX ± 0.10 / .004 .XX" ±	SCALE 10 / 1 SHEET 1 OF 1			