Material:

* Insulation: PPS UL 94V-0
  Color Black
* Pin:
  Outer sleeve: Brass, machined
  Outer sleeve Plating: 200u" Tin Plated over 60~80u" Nickel
  Inner 4 finger contact: Beryllium Copper, heat treated
  Inner 4 finger contact Plating: Gold Flash plated

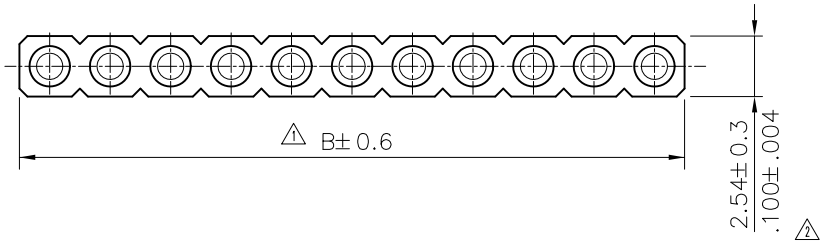

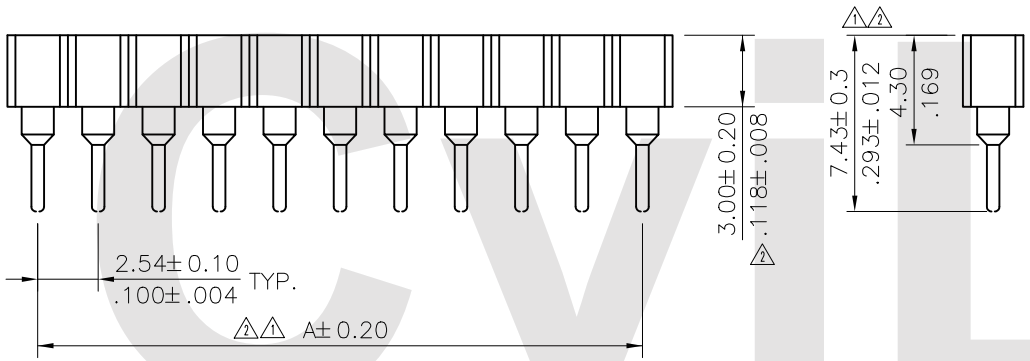

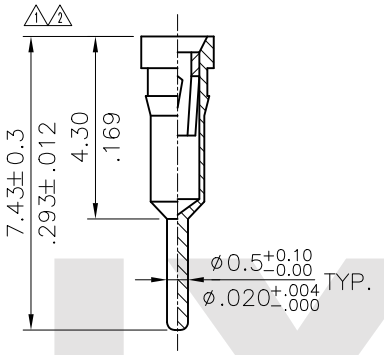

Pin detail

A = 2.54 * No. of Spaces
B = A + 2.54
* Available in 2 through 40 circuits

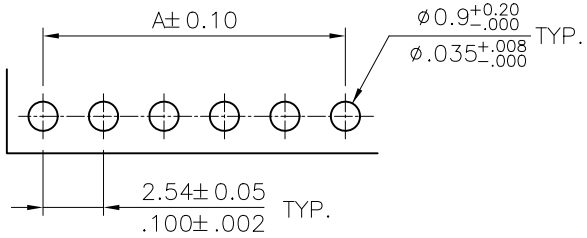

Recommended P.C. Board Layout

Ordering Code

CS10	**	D	1	000
①	②	③	④	⑤

① Series No.
② Circuits:
③ Plating Code :
D= Gold Flash plated over Nickel
④ Color : 1= Black
⑤ Option : 000= Standard

RoHS Compliant

CVILUX CORP
2016.12.15
ISSUED

SYM	NAME	DATE	REVISIONS
⚠4			
⚠3			
⚠2	Ken	11/28-16'	ECNT116299/ECRT116087
⚠1	Enya	11/9-12'	ECN12274-0/ECR12086-0

		DATE
DRAWN BY:	Ken	12/06-16'
ENGINEER:	Sun	12/06-16'
CHECKED BY:	Eisley	12/08-16'
APPROVED BY:	Eisley	12/08-16'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ± 0.20 / .008	X.° ± 1°
.XX ± 0.15 / .006	.X° ±
	.XX° ±

TITLE: 2.54MM(.100") SIP I.C. SOCKET

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CS1001SC	PART NO.	CS10**D1000
SCALE	3 / 1	SHEET 1 OF 1	