



Material: Phosphor Bronze

Wire Range	Insulation Diameter	Reel Q'ty
AWG #24~#28	1.45 (.055) MAX.	10,000 PCS.


Ordering Code:

CT02 T02 1 P E 0
① ② ③ ④ ⑤ ⑥


- ① Series No.
- ② Type: T02= AWG #22~#28
- ③ Plating: 1= 2.03 μ m(80 μ "") Min. Tin over 0.76 μ m(30 μ "") Nickel
- ④ Material: P= Phosphor Bronze
- ⑤ Plating method: E= Pre-tinned
- ⑥ Option: 0= Standard

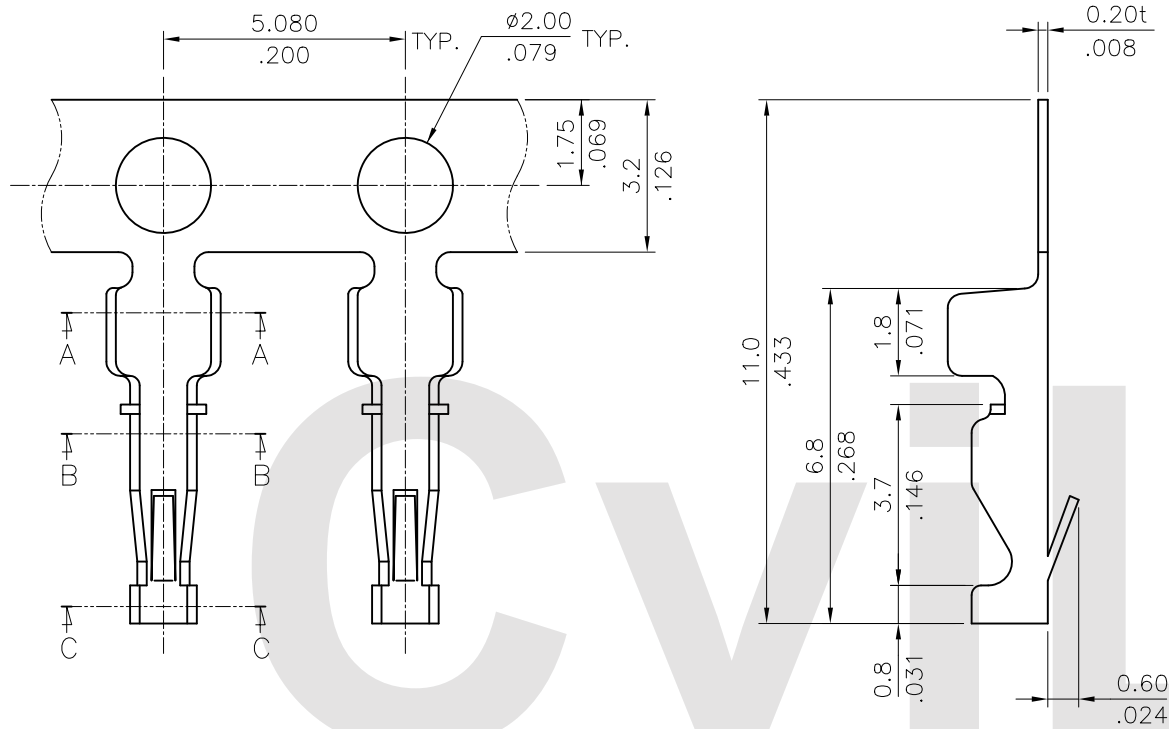


SEC.:A-A




SEC.:B-B



SEC.:C-C

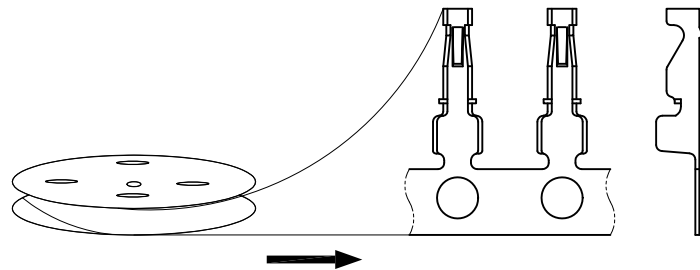

① PULL OUT DIRECTION(PLATED)

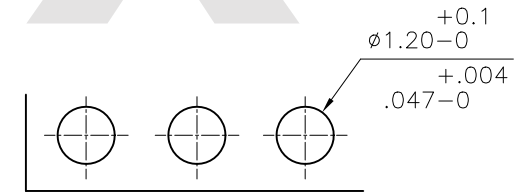

Recommended P.C. Board Layout

RoHS Compliant

4				CVILUX CORP 2015.07.02 ISSUED			DATE	UNIT: mm / inch		TITLE: BOARD IN TERMIANL	 瀚荃股份有限公司 CviLux Corporation	
3					DRAWN BY:	Karen	6/22-15'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
2					ENGINEER:	Sun	6/23-15'	.X ± 0.20 / .008	X" ± 1"	MATERIAL:		
1	Karen	6/13-15'	ECNT115140/ECRT115017		CHECKED BY:	Eisley	6/23-15'	.XX ± 0.10 / .004	X" ±			FINISH:
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	6/23-15'	.XXX ± 0.05 / .002	.XX" ±			DRAWING NO. CT0202SB	PART NO. CT02T021PE0
											SCALE 6 / 1	SHEET 1 OF 1