

Ordering Code:

CU05 S C H 1 F 00
① ② ③ ④ ⑤ ⑥ ⑦

① Series No.

② S= Socket

③ Plating option:


C= Selective 0.76μm(30μ") Gold plated
over 1.27μm(50μ") Nickel

④ Tail Style: H= Right angle



⑤ Insulator color: 0= White, 1= Black, 9= Gary

⑥ Type: F= Flat type

⑦ Option: 00= Standard

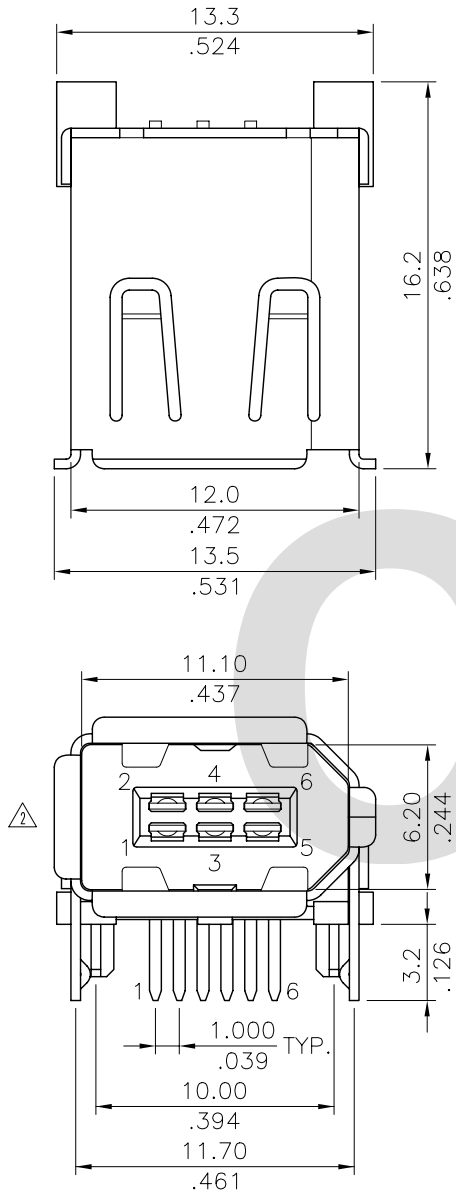

Material:
* Insulation: Glass filled polyester UL 94V-0
* Contact: Brass
* Shell: Brass
△ * Shell Plating: 80μ Nickel over 50μ Cu

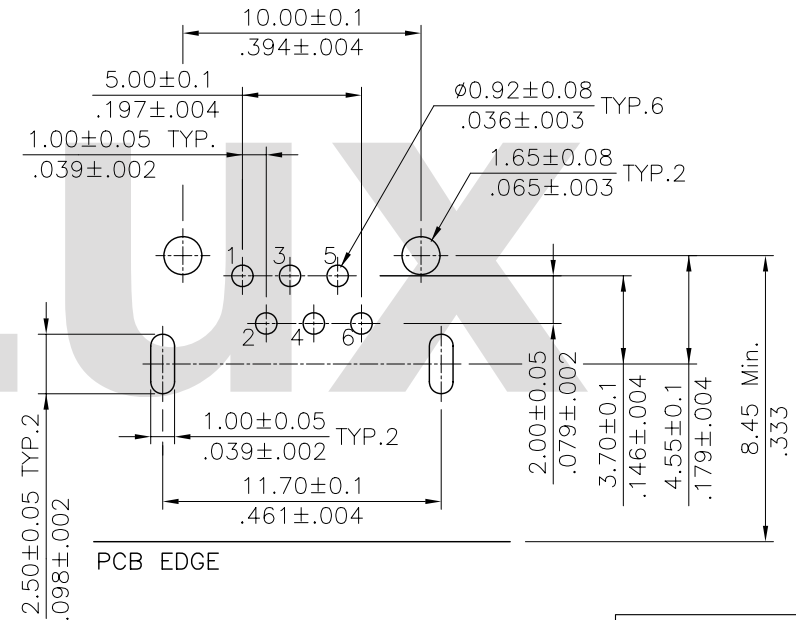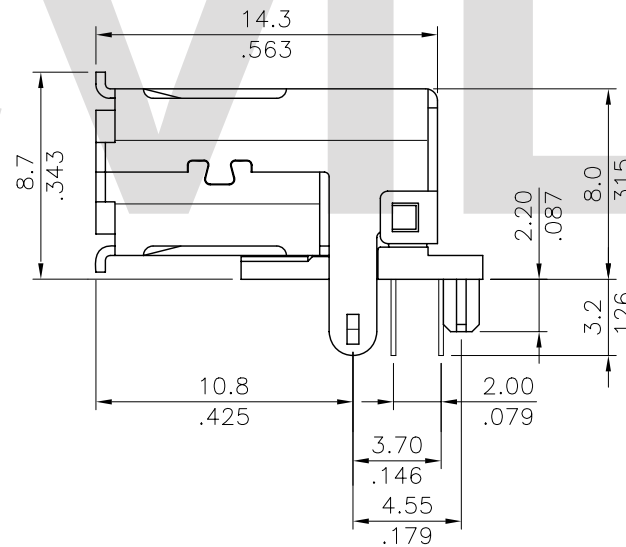

Recommended P.C. Board Layout

Lead Free Process

RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: IEEE 1394 FLAT R/A DIP RECEPTACLE CONNECTOR	 瀚荃股份有限公司 CviLux Corporation			
③					DRAWN BY: Karen	8/21-09'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
②	Karen	8/19-09'	ECN09422		ENGINEER: Eisley	8/24-09'	.X ±0.30/.012 X' ± .1'	MATERIAL:	DRAWING NO. CU0501SF	PART NO. CU05SCH*F00	
①	Sun	7/01/05'	ECR05062-0/ECN05231		CHECKED BY: David	8/24-09'	.XX ±0.20/.008 X' ± .1'	FINISH:	SCALE 3 / 1	SHEET 1 OF 1	
SYM	NAME	DATE	REVISIONS		APPROVED BY: David	8/24-09'	.XXX ±0.10/.004 X' ± .1'				

CIVILUX CORP
2009.09.01
ISSUED