
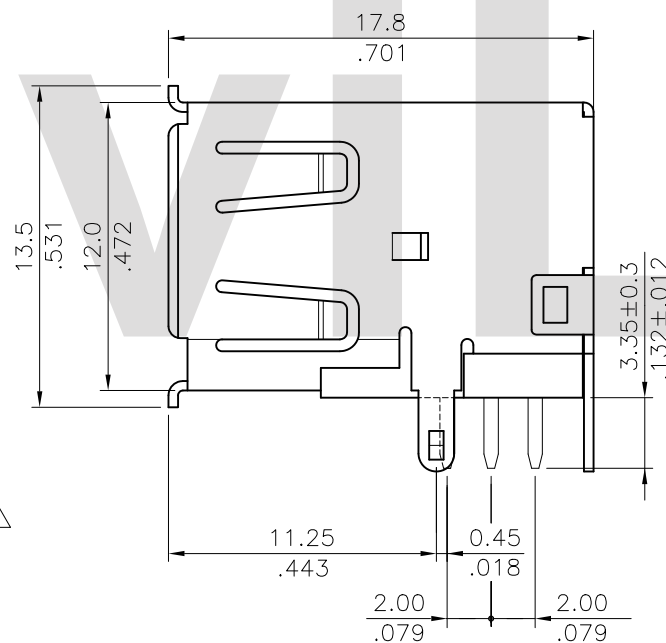
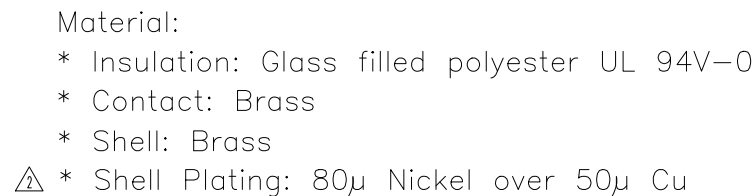


- ① Series No.
- ② S= Socket
- ③ Plating option:
C= Selective 0.76μm(30μ") Gold plated
over 1.27μm(50μ") Nickel
- ④ Tail Style: H= Right angle
- ⑤ Insulator color: 0= White, 1= Black, 9= Gary
- ⑥ Type: U= Upright type
- ⑦ Option: 00= Standard



Recommended P.C. Board Layout

Lead Free Process

RoHS Compliant

4				CVILUX CORP 2014.05.29 ISSUED			DATE	UNIT: mm / inch		TITLE: IEEE 1394 UPRIGHT R/A DIP RECEPTACLE CONNECTOR	 瀚荃股份有限公司 CviLux Corporation			
3	Sandy	5/20-14'	ECRT114028/ECNT114095		DRAWN BY:	Sandy	5/20-14'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
2	Sun	7/01/05'	ECR05062-0/ECN05231		ENGINEER:	Sun	5/21-14'			.X ±0.30/.012		X* ± 1"	MATERIAL:	
1	SUN	11/23/04	ECR04112-0/ECN04472		CHECKED BY:	Eisley	5/23-14'	.XX ±0.20/.008	X* ±					FINISH:
SYM	NAME	DATE	REVISIONS		APPROVED BY:	Eisley	5/23-14'			.XXX ±		.XX* ±		
											DRAWING NO.	CU0502SH	PART NO.	CU05SCH*U00
											SCALE	3 / 1	SHEET	1 OF 1