Materials:

* Insulator: Glass filled PBT UL 94V-0
  Color Ivory(Nature)
* Shell: Zinc alloy with Nickel plated
△3 * Contact: Brass

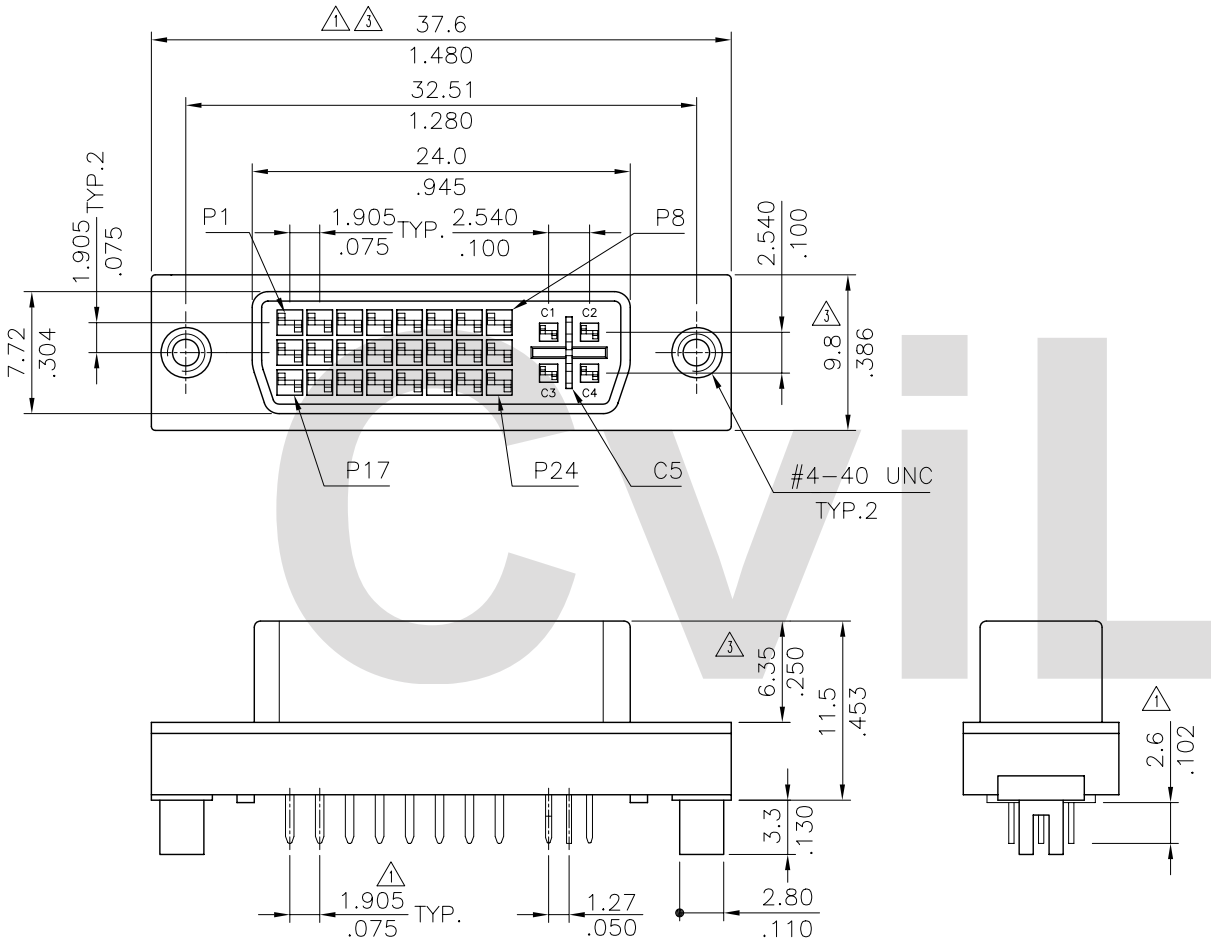

Ordering Code:

CU07 29 S * V I F
① ② ③ ④ ⑤ ⑥ ⑦

① Series No.
② Contacts: 29= 24+4+1
③ Contact type: S= Socket
④ Plating code:
A= Selective Gold flash plated over 1.27μm(50μ") Nickel
B= Selective 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
C= Selective 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
⑤ Tail style: V= Straight
⑥ Product type: I= Integrated Type
⑦ Option: F= #4-40 UNC Threaded insert

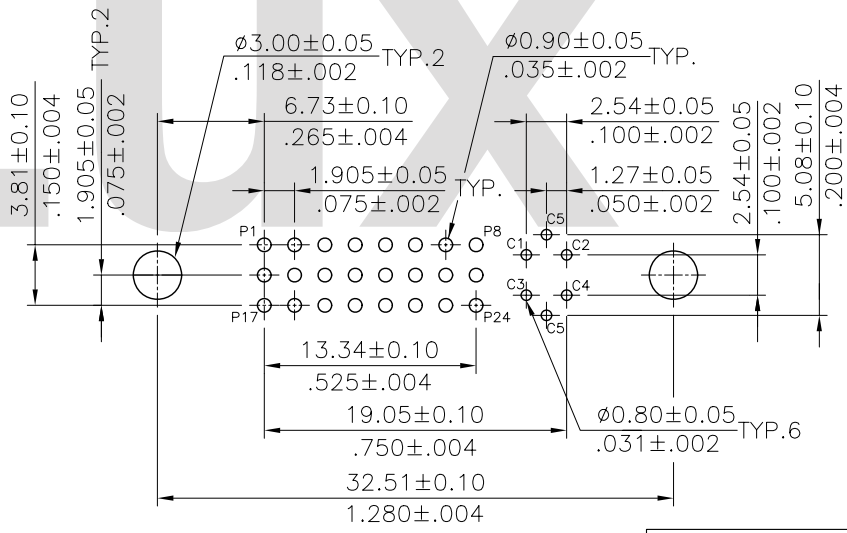

Recommended P.C Board Layout

RoHS Compliant

△4						DATE	UNIT: mm / inch	TITLE: DVI STRAIGHT RECEP. CONN. (INTEGRATED TYPE 24+4+1)
△3	Sandy	11/24-06'	ECN06421	DRAWN BY:	Sandy	11/24/06'	TOLERANCE UNLESS OTHERWISE SPECIFIED	
△2	Sun	9/30/05'	ECR05067-0/ECN05275	ENGINEER:	Eisley	11/27-06'	.X ± 0.30/.012 X.° ± 1°	MATERIAL:
△1	JASON	04/27-04	ECN04171, ECR04038-0	CHECKED BY:	David	11/27-06'	.XX ± 0.20/.008 .X° ±	FINISH:
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	11/27-06'	.XXX ± 0.10/.004 .XX° ±	

CVILUX CORP. 2006.12.04 ISSUED

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CU0706SD	PART NO.	CU0729S*VIF
SCALE	2 / 1	SHEET	1 OF 1