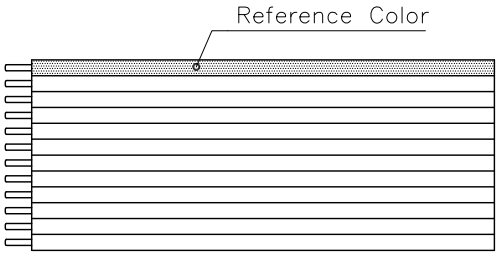

UL GRADE

UL STYLE: 2678
Rate temperatrue: −20°C To 105°C
Rate voltage: 150V
Flame Tast: UL−VW−1

PHYSICAL:
Insulation material: Polyvinyl chloride (PVC)

Color: Gray with Red strip

ELECTRICAL CHARACTERISTICS:
Impedance: 75Ω (Unblance)
Capacitance: 22.5 PF/ft
Inductance: .317 uH/ft
Propagation Delay: 1.7 ns/ft
Insulation resistance: 1G Ω/m Min.

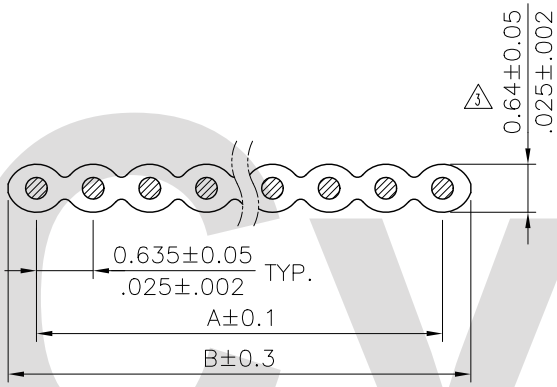

P/N: CW01**B9***



P/N: CW01**A9***

Circuits	Dimension	
	A	B
50	31.115(1.225)	31.76(1.250)
68	42.545(1.675)	43.19(1.700)
80	50.165(1.975)	50.805(2.000)

RoHS Compliant

SYM	NAME	DATE	REVISIONS
4			
3	Karen	8/18-11'	ECN11187/ECR11061-0
2	Sun	8/28/07'	ECR07128-3/ECN07353
1	Jim	9/22 06'	ECN06345

CVILUX CORP 2011.08.30 ISSUED

		DATE
DRAWN BY:	Karen	8/18-11'
ENGINEER:	Eisley	8/23-11'
CHECKED BY:	Eisley	8/23-11'
APPROVED BY:	David	8/23-11'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ±	X.° ± 1°
.XX ±	.X° ±
.XXX ±	.XX° ±

TITLE: 0.635MM(.025") PITCH RIBBON WIRE

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CW0101SE	PART NO.	CW01**A9000
SCALE	2 / 1	SHEET 1 OF 1	

CviLux