CviLux

Cl08 Series 2.00mm(.079") Wire to Board Connectors SMT & DIP Headers


- 3.0mm above the board
- O Insulation: High temperature plastic UL 94V-0, Color Black
- With metal fixed tabs to secure connector in place

ROHS Compliant
























 $A = 2.0 \times No.$ of Spaces B = A + 3.4 C = A + 2.6D = A + 0.4



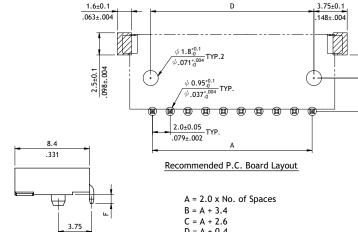

Ordering Code

0 2 6 6 0 NHC I 0 8 \mathbf{H} \mathbf{R}

- Series No.
- No. of Circuits: 03 to 17
- M = SMT Type
- Plating Code: 1 = Matte Tin over Nickel
 - 2 = Gold flash over Nickel
- **5** Type: H = Side Entry
- 6 Packing Options: R = Tape & Reel
- Other Options: 0 = DIM.E = 0.9 (Standard)
- 3 -NH = For Lead Free IR Process and Halogen-Free

C I 0 8 1 0

Series No.

.148

- 2 No. of Circuits: 03 to 10
- P = DIP Type
- 4 Plating Code: 1 = Matte Tin over Nickel
 - 2 = Gold flash over Nickel
- **6** Type: H = Side Entry
- Packing Options: R = Tape & Reel
- Other Options: 0 = DIM.E = 0.9; DIM.F = 1.0 (Standard)
- 3 -NH = For Lead Free IR Process and Halogen-Free