


CI01 Series 2.00mm(.079") Single Row Wire to Board DIP Headers

- Low profile, Pin kinked
- With locking slots
- Mate with CI01 Housing
- Insulator: Polyamide UL 94V-0, Color Nature
- With Tin plated 0.5mm square pin





Straight

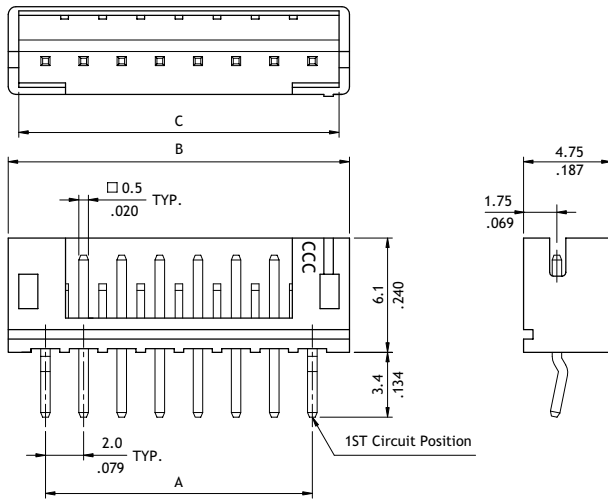

Circuits	Dimension		
	A	B	C
2	2.0(.079)	6.0(.236)	4.9(.193)
3	4.0(.157)	8.0(.315)	6.9(.272)
4	6.0(.236)	10.0(.394)	8.9(.350)
5	8.0(.315)	12.0(.472)	10.9(.429)
6	10.0(.394)	14.0(.551)	12.9(.508)
7	12.0(.472)	16.0(.630)	14.9(.587)
8	14.0(.551)	18.0(.709)	16.9(.665)
9	16.0(.630)	20.0(.787)	18.9(.744)
10	18.0(.709)	22.0(.866)	20.9(.823)
11	20.0(.787)	24.0(.945)	22.9(.902)
12	22.0(.866)	26.0(1.024)	24.9(.980)
13	24.0(.945)	28.0(1.102)	26.9(1.059)
14	26.0(1.024)	30.0(1.181)	28.9(1.138)
15	28.0(1.102)	32.0(1.260)	30.9(1.217)
16	30.0(1.181)	34.0(1.338)	32.9(1.295)

Right Angle

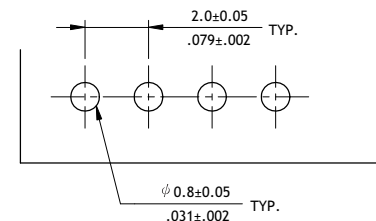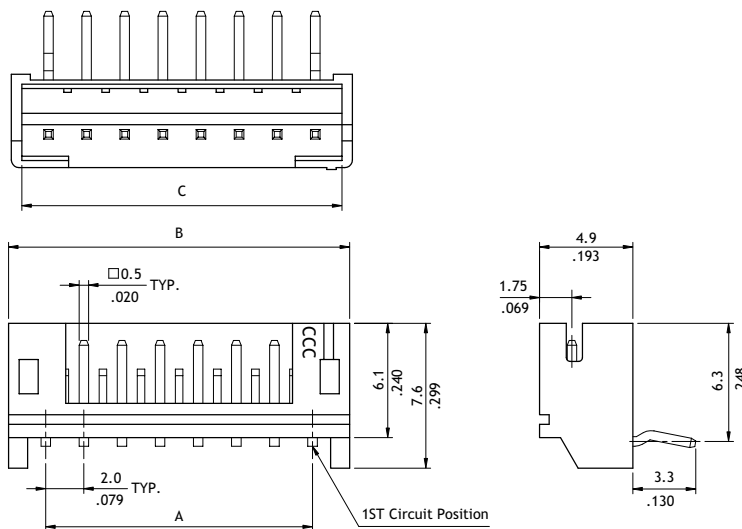

Recommended P.C. Board Layout

Ordering Code

① CI01 ② 16 ③ P ④ 1 ⑤ V K0 - ⑦ NH

- ① Series No.
- ② No. of Circuits: 02 to 16
- ③ P = DIP Type
- ④ Plating Code: 1 = Matte Tin over Nickel
- ⑤ Type: V = Straight
H = Right Angle
- ⑥ Other Options: 00 = Without Pin Kinked
K0 = With Pin Kinked (Standard)
*Special options consult manufacturer
- ⑦ -LF = For Lead Free soldering process
-NH = For Lead Free soldering process and Halogen-Free