
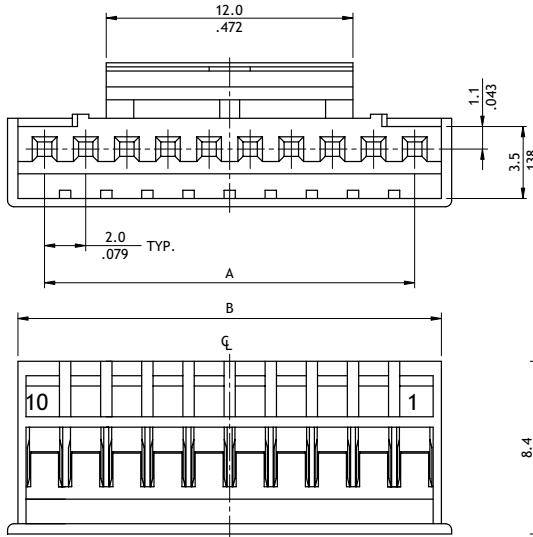




CI01 Series 2.00mm(.079") Single Row Wire to Board Housing & SMT Header

- With locking latch provide secure mating
- Fixed tabs provide PCB hold-down
- Insulator: Polyamide UL 94V-0, Color Nature
- Housing mate with CI06 Terminal (P/N: CI06T011PE0)


RoHS Compliant

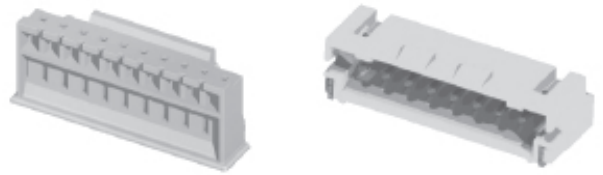

| Circuits | Dimension | |
|----------|-------------|-------------|
| | A | B |
| 10 | 18.0(.709) | 20.6(.811) |
| 12 | 22.0(.866) | 24.6(.969) |
| 14 | 26.0(1.024) | 28.6(1.126) |
| 16 | 30.0(1.181) | 32.6(1.283) |

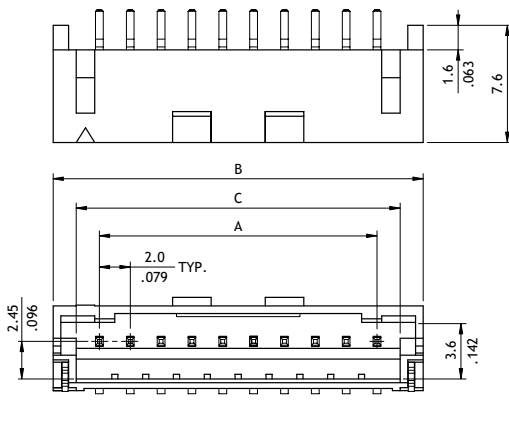

A = 2.0 x No. of Spaces
B = A + 6.0
C = A + 3.0

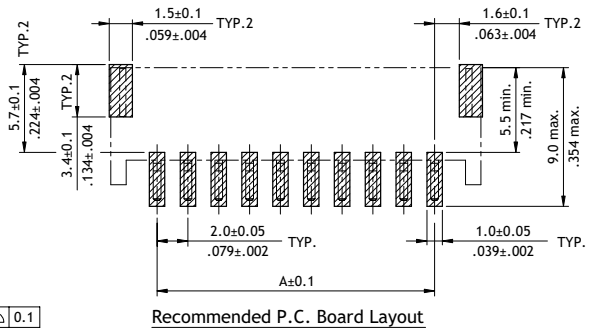

Ordering Code

① CI ② 01 ③ 16 ④ S ⑤ 00L ⑥ 0

- ① Series No.
- ② No. of Circuits: 10, 12, 14, 16
- ③ S = Housing
- ④ Latch Options:
00L = With Locking Latch
- ⑤ Other Options:
0 = Standard (Color Nature)
*Special options consult manufacturer

① CI ② 01 ③ 16 ④ M ⑤ 1 ⑥ H ⑦ R ⑧ 0 - NH

- ① Series No.
- ② No. of Circuits: 10, 12, 14, 16
- ③ M = SMT Type
- ④ Plating Code: 1 = Matte Tin over Nickel
- ⑤ Type: H = Side Entry
- ⑥ Packing Options: R = Tape & Reel ; T = Tube
- ⑦ Other Options: L = With Locking Latch
0 = Standard (for -LC type)
- ⑧ -NH = For Lead Free soldering process and Halogen-Free
-LC = For Lead Free soldering process