Material:

* Insulation: Nylon 6T UL 94V-0
  Color Nature
△3* Slider: Nylon 6T UL 94V-0, Color Brown
* Contact: Phosphor Bronze

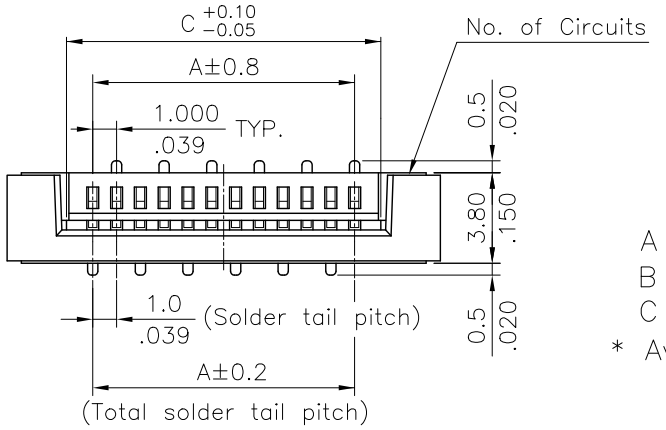

A = 1.00 * No. of Spaces
B = A + 7.2
C = A + 2.1
* Available in 4 through 32 circuits

Ordering Code

CF10	**	1	M	0	T	0	-	LF
①	②	③	④	⑤	⑥	⑦		⑧

①Series No.
②No. of Circuits
③Plating code:
1= Matte Tin plated over Nickel
④Contact type: M= SMT type
⑤Insulation Color: 0= Nature
⑥Packing : T= Tube Packaged
⑦Other option: 0= Standard
⑧-LF= For Lead Free IR Process

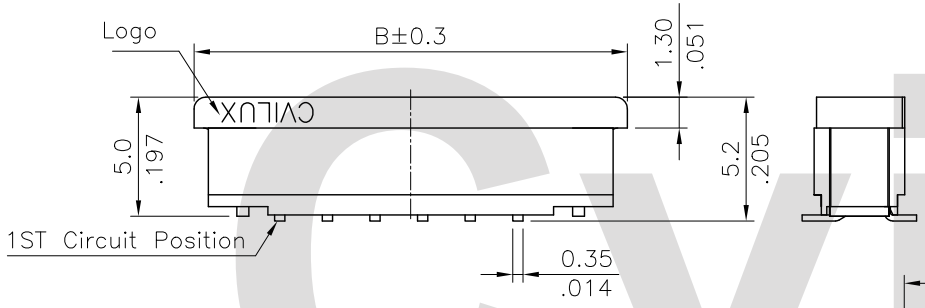

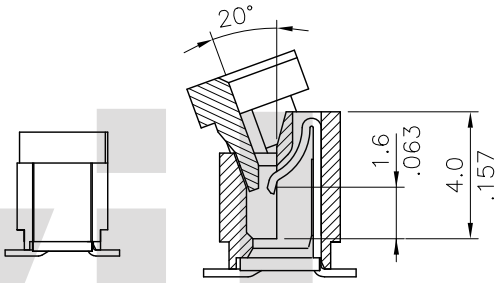

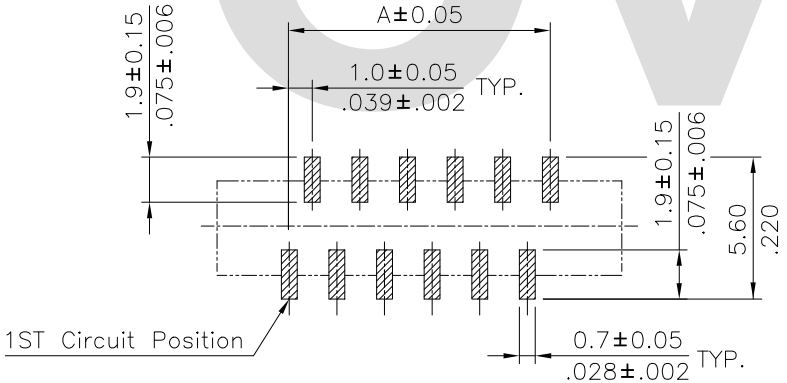

Recommended P.C. Board Layout

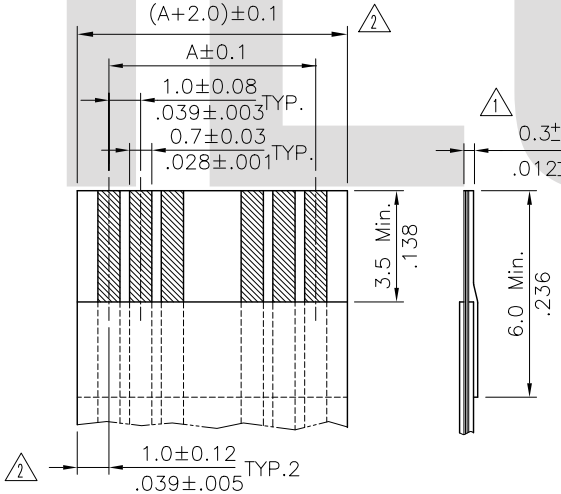

* ACCOMMODATED FFC

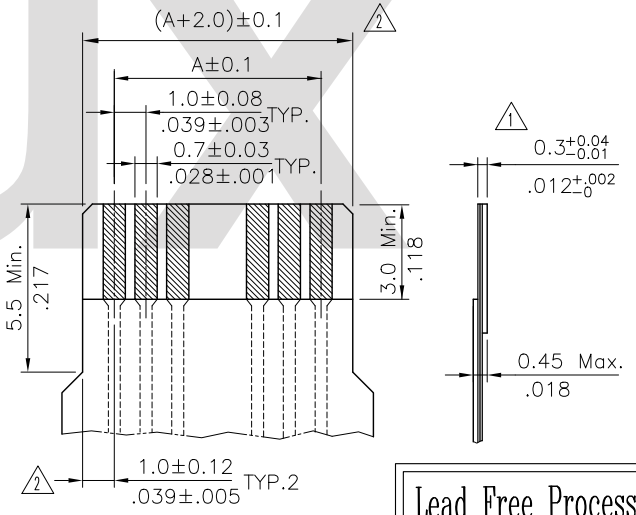

* ACCOMMODATED FPC

Lead Free Process

RoHS Compliant

SYM	NAME	DATE	REVISIONS
△4			
△3	Sandy	12/2-10'	ECN10391
△2	Bill	3/26-08'	ECR08027-0/ECN08145
△1	Sandy	9/22-07'	ECN07381/ECR07065-1

CVILUX CORP 2010.12.21 ISSUED

		DATE
DRAWN BY:	Sandy	12/2-10'
ENGINEER:	Clark	12/9-10'
CHECKED BY:	Eisley	12/10-10'
APPROVED BY:	David	12/10-10'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X ± 0.15/.006	X.° ± 1°
.XX ± 0.10/.004	.X° ±
.XXX ± 0.05/.002	.XX° ±

TITLE: 1.00mm(.039") SMT TYPE ZIF FFC/FPC CONNECTOR

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CF1017SD	PART NO.	CF10**1MOT0-LF
SCALE	3 / 1	SHEET 1 OF 1	