
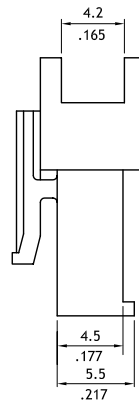
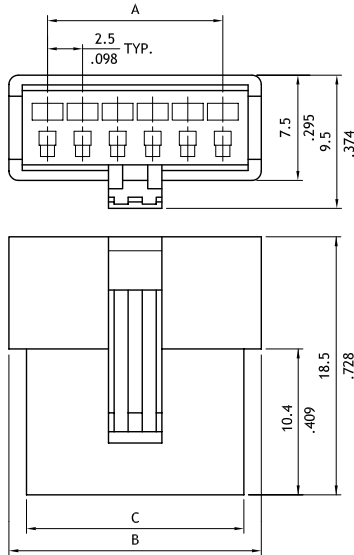




CP06 Series 2.50mm(.098") Plug Connectors

- With locking latch mounting ears
- Available in 2 through 12 circuits
- Can be used CP06 Crimp Terminal
- Nylon 66 UL 94V-2, Color Black


RoHS Compliant




Circuits	Dimension		
	A	B	C
2	2.5(.098)	8.2(.323)	5.5(.216)
3	5.0(.197)	10.7(.421)	8.0(.315)
4	7.5(.295)	13.2(.519)	10.5(.413)
5	10.0(.394)	15.7(.618)	13.0(.512)
6	12.5(.492)	18.2(.717)	15.5(.610)
7	15.0(.591)	20.7(.815)	18.0(.709)
8	17.5(.689)	23.2(.915)	20.5(.807)
9	20.0(.787)	25.7(1.012)	23.0(.905)
10	22.5(.886)	28.2(1.110)	25.5(1.004)
11	25.0(.984)	30.7(1.209)	28.0(1.102)
12	27.5(1.083)	33.2(1.307)	30.5(1.201)

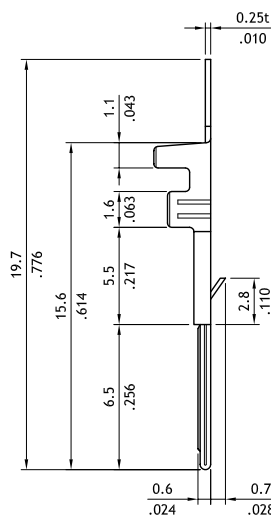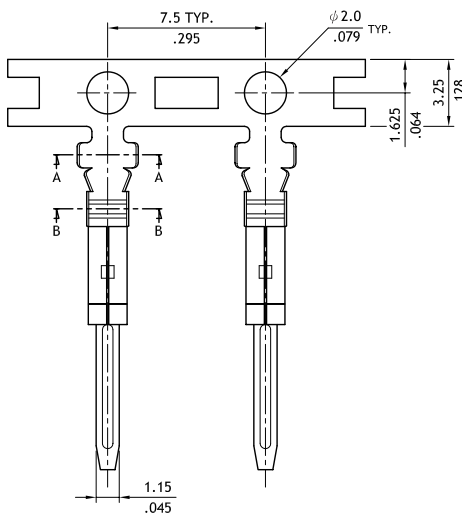

Wire Range	Insulation Diameter	Reel Qty
AWG #22-#28	1.70 (.067) MAX.	7000 PCS.



SEC.: A-A



SEC.: B-B

Ordering Code

1 CP06 2 12 3 P 4 001 5 0

- 1 Series No.
 - 2 No. of Circuits: 02 to 12
 - 3 Type: P = Plug
 - 4 Color: 001 = Color Black
 - 5 Other Options: 0 = Standard
- *Special options consult manufacturer

1 CP06 2 T02 3 1 4 B 5 E 6 P

- 1 Series No.
- 2 Wire Range: T02 = AWG #22 ~ #28
- 3 Plating: 1 = Tin over Nickel
- 4 Material: B = Brass
- 5 Plating method: E = Pre-tinned
- 6 Style: P = Plug Terminal