



CP33 Series 5.08mm (.200") IDC Plug Power Connectors




- Insulator displacement termination
- Option closed end daisy chain cover
- Mates with CP32 or CP33 plug connector
- Accept AWG #18 ~#22 wire
- Nylon 66 UL 94V-0 or V-2 Color Nature
- Contact: Tin plated Phosphor Bronze




RoHS Compliant




Part No.	Flame Class	Wire Range
CP3304S1000	94V-2	AWG #18-#20
CP3304S100A	94V-2	AWG #22
CP3304S100B	94V-0	AWG #18-#20
CP3304S100C	94V-0	AWG #22



Through Cover
P/N:CP33S00C201





One End Cover
P/N:CP33S00C202

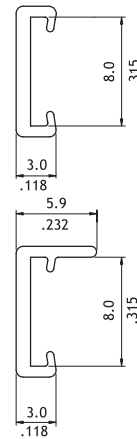

CP33 Series 5.08mm (.200") Board Mount Receptacle Power Connectors


- Optional mounting pegs
- Mates with CP32 or CP33 Receptacle connector
- Nylon 66 UL 94V-2, Color Nature
- Contact : Tin plated Phosphor Bronze



RoHS Compliant





P/N CP3304P1V00

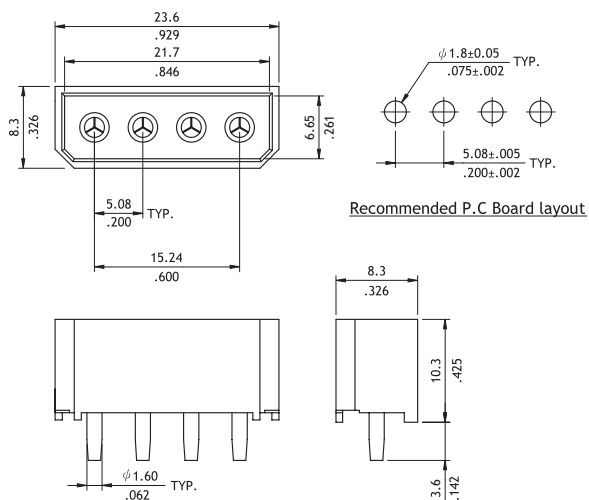

Recommended P.C Board layout

P/N CP3304P1H00

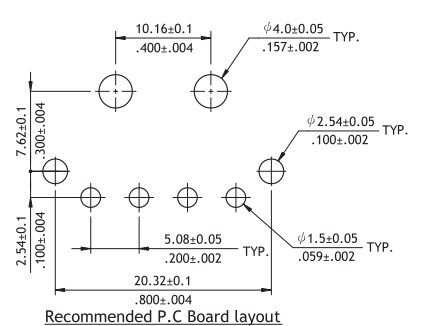

Recommended P.C Board layout