P/N CA32**V**00

Recommended P.C. Board Layout

S0 = Without Latch & Without Polarization

Straight Type:

CA30 & CA31 Series Flat Cable Assemblies

Compact and low profile IDC connector with 1.27mm pitch flat cable assembly combinations.

With full range connectors produced in house, Cvilux is fully equipped to provide cost-effective and high quality flat cble assemblies.

Furthermore, integrated production and assembly process can save your time to market and increase more profit.

Please check below sketch for all kinds of options and advice more details (length, stripped, red line positions, polarizing direction....etc.) we will follow up your request accordingly.

Consult CviLux sales person if customized assembly required.


TYPE A	TYPE B	TYPE C	TYPE D
CA30	CA30	CA30	CA30 CA30
TYPE E	TYPE F	TYPE G	TYPE H
CA30	CA30	CA30	CA30
CA30	CA30	CA30	CA30
TYPE J	TYPE K	TYPE M	TYPE N
CA31 CA30	CA31	CA31	CA31 CA30
TYPE P	TYPE Q	TYPE R	TYPE S
CA31 CA30	CA30	CA31 CA30	CA31 CA30


CA32 Series 1.27mm(.050") Female DIP Type Connectors Mate with CA30 connector

RoHS compliant 71


P/N CA32**H**0L










A= 1.27 x No. of Spaces



WITHOUT LATCH TYPE

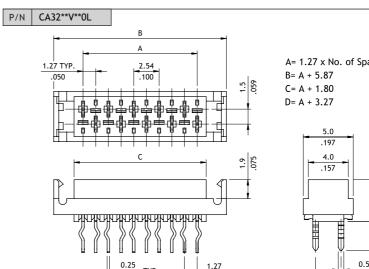







2 No. of Circuits: 04 to 26

Ontact Type: V = Straight

1 = Matte Tin over Nickel

H = Right Angle

*Optional plating available but MOQ requested

Series No.

A Plating Code:

6 Color: 3 = Red

C A 3 2

2 2 6

3 1

00 = Without Latch & With Polarization

0L = With Latch

00 = Without Latch

0L = With Latch

*Special options consult manufacturer