




**CA32 Series 1.27mm(.050") Female SMT Type Connectors**


- ⊙ Mate with CA30 connector
- ⊙ High temperature plastic UL 94V-0, color red




P/N CA32\*\*M\*\*0A

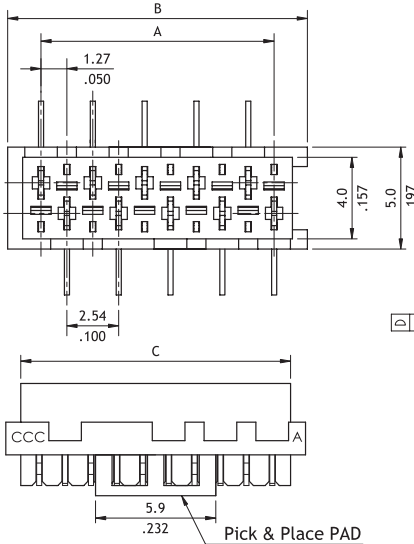



A = 1.27 x No. of Spaces  
 B = A + 3.28  
 C = A + 1.80  
 D = A + 3.97  
 E = A - 1.27

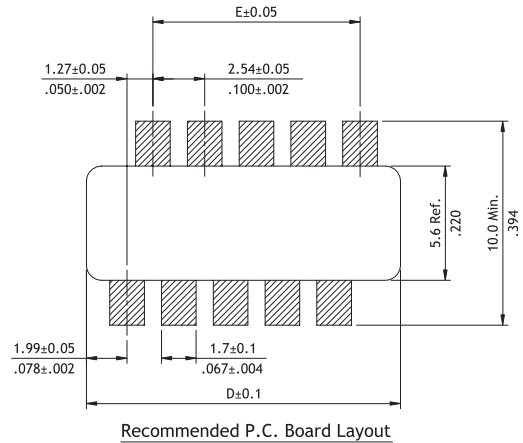

P/N CA32\*\*M\*\*0L

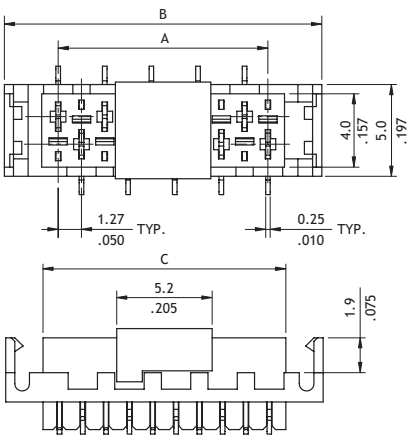

A = 1.27 x No. of Spaces  
 B = A + 5.87  
 C = A + 1.80  
 D = A + 3.27

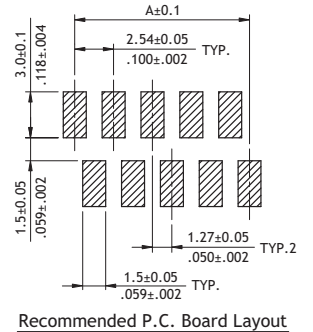

**Ordering Code**

**1** **2** **3** **4** **5** **6** **7**  
**CA32 26 M 130A**

- 1** Series No.
- 2** No. of Circuits: 04 to 26
- 3** Contact Type: M = SMT Type
- 4** Plating Code:  
 1 = Matte Tin over Nickel  
 \*Optional plating available but MOQ requested
- 5** Color: 3 = Red
- 6** Pad Options:  
 0 = With Pad (Reel Packing)
- 7** Other Options:  
 A = Middle mount type  
 0 = Top mount type (Without Latch)  
 L = Top mount type (With Latch)  
 \*Special options consult manufacturer

CA

IDC CONNECTORS