



CA33 Series 1.27mm(.050") IDC & Crimping Type Connectors

- Can be used CW03 1.27mm(.050") Center Spacing flat ribbon cable
- Mate with CA35 connectors
- Can be used CA33 crimp clip terminal
- Insulator: Glass Filled Polyester UL 94V-0, Color Nature

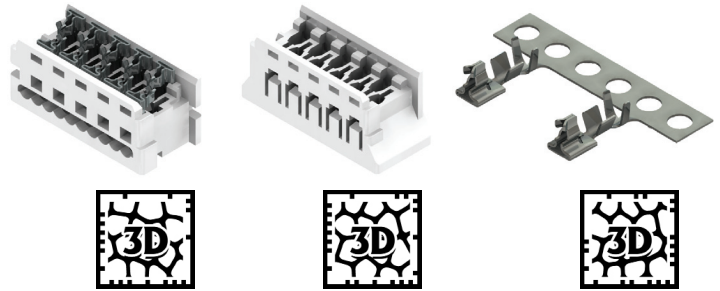


RoHS Compliant  


P/N CA33**P10I0-NH

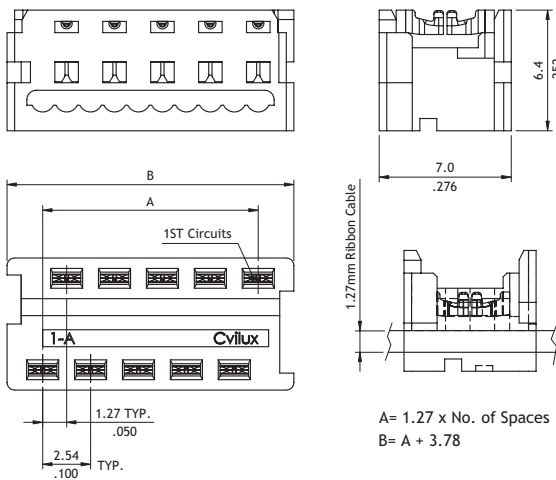

P/N CA33**S0000-NH

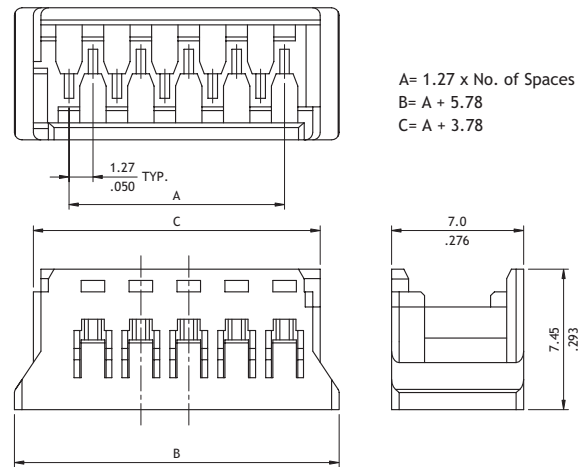

P/N CA33T011PE0

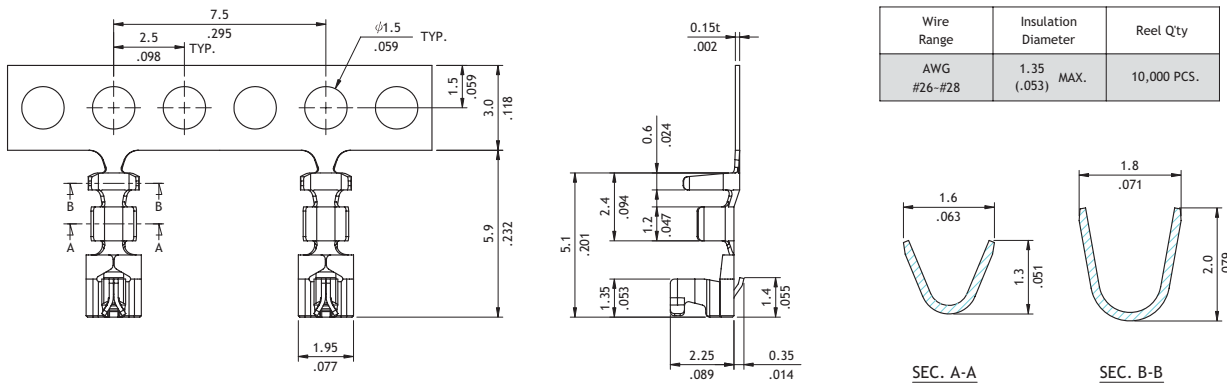

Ordering Code

- | | | | | | | | | | | | | | |
|---------------------|------------------------------------|--|--|----------------------------|-----------------------------|---|-----------------------------|---------------------|------------------------------------|------------------------------|----------------------------|--------------------------------------|-----------------------------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 1 | 2 | 3 | 4 | 5 | 6 |
| CA33 | 26 | P | 1 | 0 | I | 0 | -NH | CA33 | 26 | S00 | 0 | 0 | -NH |
| 1 Series No. | 2 No. of Circuits: 04 to 26 | 3 Contact Type:
P = Pin Header | 4 Plating:
1 = Tin over Nickel | 5 Color: 0 = Nature | 6 Type: I = IDC Type | 7 Other Options:
0 = Standard
(Tube Packing) | 8 -NH = Halogen-Free | 1 Series No. | 2 No. of Circuits: 04 to 26 | 3 Type: S00 = Housing | 4 Color: 0 = Nature | 5 Other Options: 0 = Standard | 6 -NH = Halogen-Free |