
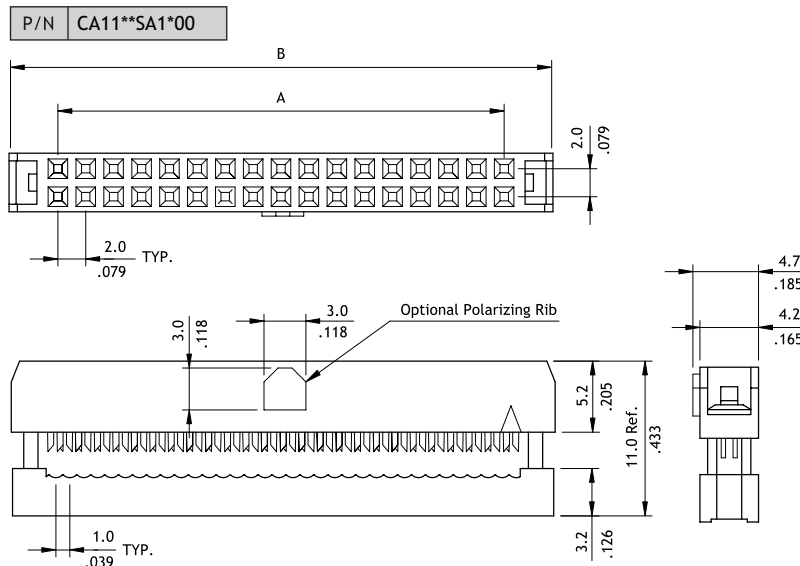



CA11 Series 2.00mm(.079") Center Spacing Flat Cable - IDC Sockets

- Mates with CH71, CH75 and CH74 Headers
- Can be used CW02 1.00mm(.039") Center Spacing flat ribbon cable

RoHS Compliant



Circuits	Dimension		
	A	B	C
6	4.0(.157)	11.2(.441)	11.2(.441)
8	6.0(.236)	13.2(.520)	13.2(.520)
10	8.0(.315)	15.2(.598)	15.2(.598)
12	10.0(.394)	17.2(.677)	17.2(.677)
14	12.0(.472)	19.2(.756)	19.2(.756)
16	14.0(.551)	21.2(.835)	21.2(.835)
20	18.0(.709)	25.2(.992)	25.2(.992)
22	20.0(.787)	27.2(1.071)	27.2(1.071)
24	22.0(.866)	29.2(1.150)	29.2(1.150)
26	24.0(.945)	31.2(1.228)	31.2(1.228)
30	28.0(1.102)	35.2(1.386)	35.2(1.386)
32	30.0(1.181)	37.2(1.465)	37.2(1.465)
34	32.0(1.260)	39.2(1.543)	39.2(1.543)
36	34.0(1.339)	41.2(1.622)	41.2(1.622)
40	38.0(1.496)	45.2(1.780)	45.2(1.780)
44	42.0(1.654)	49.2(1.937)	49.2(1.937)
50	48.0(1.890)	55.2(2.173)	55.2(2.173)
60	58.0(2.283)	65.2(2.567)	65.2(2.567)
64	62.0(2.441)	69.2(2.724)	69.2(2.724)

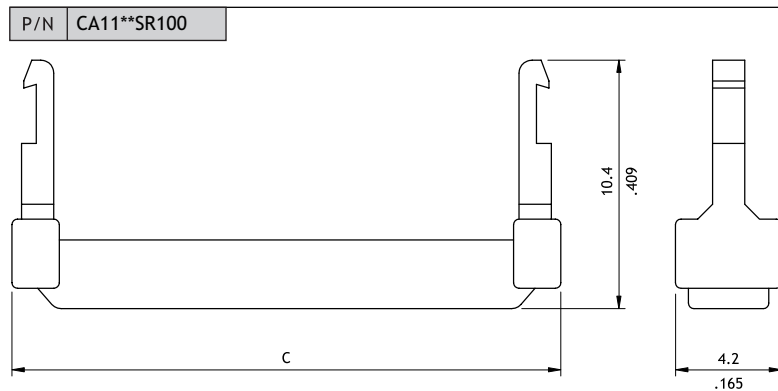

Strain Relief

Ordering Code

① CA ② 11 ③ 64 ④ S ⑤ A ⑥ 1 ⑦ 00

- ① Series No.
- ② No. of Circuits: See above table
- ③ Contact Type: S = Socket
- ④ Plating Code:
A = Selective Gold flash over Nickel
*Optional plating available
but MOQ requested

- ⑤ Color: 1 = Black
- ⑥ Other Options:
00 = With polarizing rib
(Standard)
A0 = Without polarizing rib
*Special options consult
manufacturer

① CA ② 11 ③ 64 ④ SR ⑤ 1 ⑥ 00

- ① Series No.
- ② Contacts: See above table
- ③ SR = Strain-Relief
- ④ Color: 100 = Black