



CF25 Series 0.50mm(.020")H=2.20 SMT ZIF One-Touch FFC/FPC Connectors

- 2.2mm above the board
- FFC/FPC zero insertion force and high retention force
- Insulator: High temperature plastic UL 94V-0, Color Nature
- Cover: High temperature plastic UL 94V-0, Color Black
- Actuator designed easy for FFC/FPC installation and reliable operation
- With metal fixed tabs to secure connector in place



RoHS Compliant   

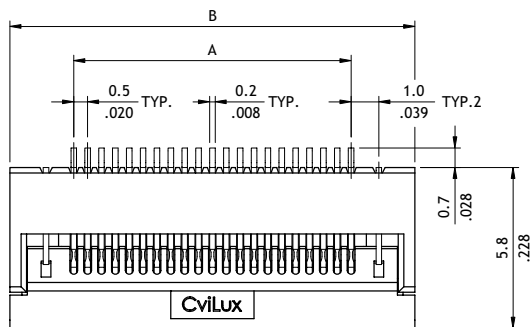

$$A = 0.5 \times \text{No. of Spaces}$$





$$B = A + 4.6$$

$$C = A + 1.1$$


$$D = A + 1.0$$

$$E = A + 2.6$$


$$F = A + 2.1$$

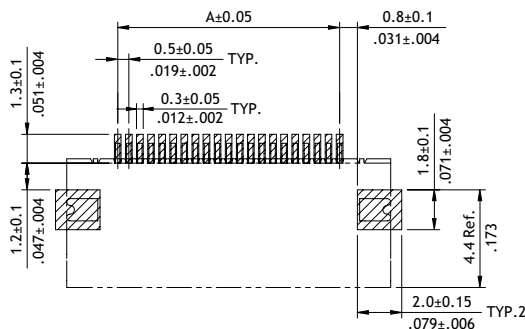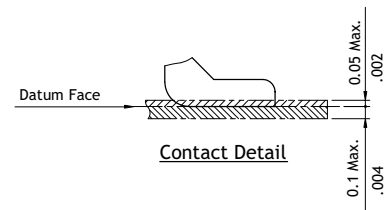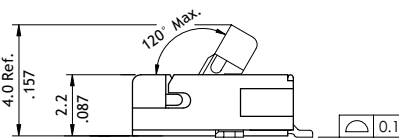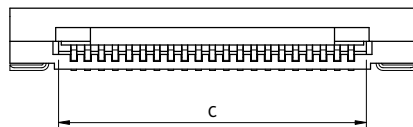

Recommended P.C. Board Layout

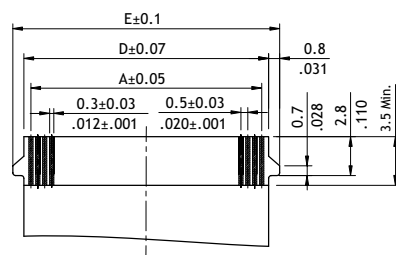

Accommodated FFC/FPC (TYPE1)

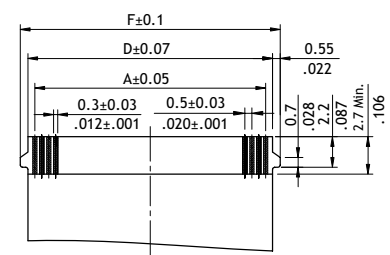

Accommodated FFC/FPC (TYPE2)

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨
CF 2 5 6 5 1 D 0 T E - 0 5 - NH

- ① Series No.
- ② Circuits: 05 to 65
Circuits not found above please consult manufacturer
- ③ Plating Code:
1 = Matte Tin over Nickel

- ④ Contact Style:
D = Downside contact
- ⑤ Color: 0 = Nature
- ⑥ Packing Options:
R = Tape & Reel
T = Tube

- ⑦ Other Options:
D: Accommodated FFC/FPC (Type 1)
E: Accommodated FFC/FPC (Type 2)
- ⑧ Pitch: 05 = 0.50 mm
- ⑨ -NH = For Lead Free IR process and Halogen-Free