




CH71 Series 2.00mm(.079") Dual Row Pin Headers

- With standoff prevent flux wicking
- Mate with CB74, CB76 and CB78 series

RoHS Compliant  






P/N CH71**2VA00-NH

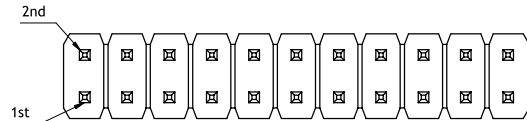


A = 2.0 x No. of Spaces
B = A + 2.0
Pin overall length 30.0mm max.

Option Code	Pin Dimension	
	C	D
00	3.9(.154)	2.8(.110)
01	6.8(.268)	3.0(.118)

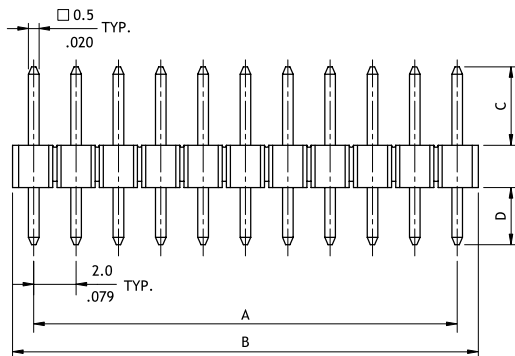




Recommended P.C. Board Layout

P/N CH71**2HA00-NH

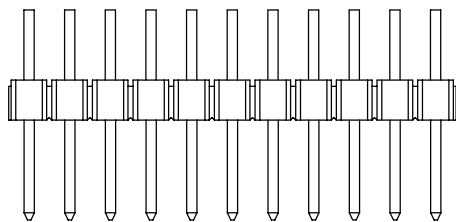

A = 2.0 x No. of Spaces
B = A + 2.0

Option Code	Pin Dimension		
	C	D	E
00	3.9(.154)	2.8(.110)	1.1(.043)
02	2.9(.114)	2.8(.110)	1.1(.043)

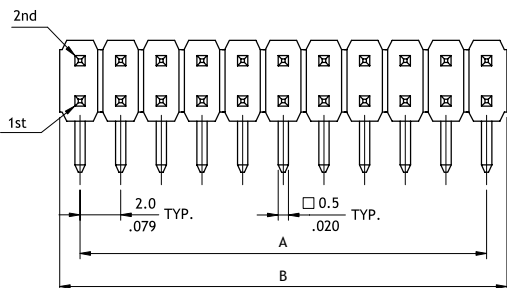

Recommended P.C. Board Layout

Ordering Code

① CH ② 7 ③ 1 ④ ⑤ ⑥ ⑦
CH 7 1 8 0 2 V A 0 0 - NH

- ① Series No.
- ② No. of Circuits: 02 to 80
- ③ Plating Code:
2 = Gold flash over Nickel
- ④ Tail: V = Straight DIP Type
H = Right Angle DIP Type

- ⑤ Insulator Material & Color:
A = Nylon 6T, Color Black
- ⑥ Other Options: 00 = Standard
*See option code table
*Consult manufacturer for customized pin length
- ⑦ -NH = For Lead Free soldering process and Halogen-Free