

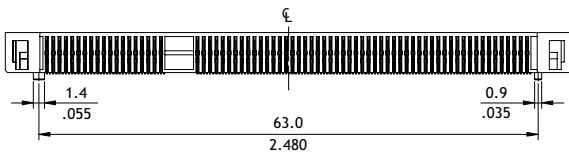



CS69 Series DDR1&DDR2 S.O DIMM Socket H=5.2

- Insulator: LCP UL 94V-0
- Contact: Copper Alloy
- Power supply: 1.8V & 2.5V


RoHS Compliant

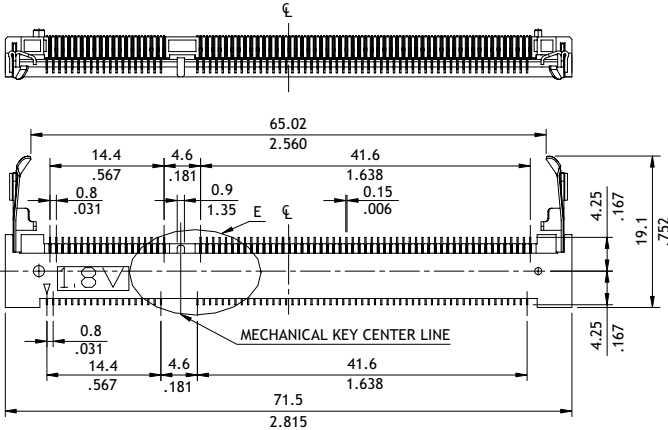

DETAIL E : TYPE1



DETAIL E : TYPE2

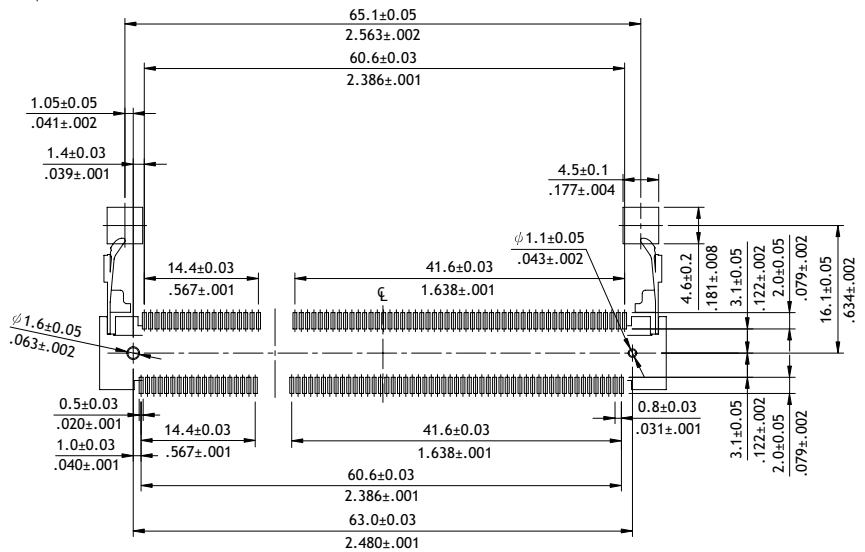

Recommended P.C. Board Layout

Ordering Code

① CS ② 6 ③ 9 ④ 1 ⑤ 4 ⑥ 4 ⑦ 2 ⑧ C ⑨ A ⑩ 0 ⑪ - ⑫ 0 ⑬ 0

- ① Series No.
- ② No. of Circuits: 144
- ③ Plating Code:
2 = Gold flash over Nickel
- ④ Height: A = 5.2mm
- ⑤ Type: A0 = Type 2 (Power supply 1.8V)
A1 = Type 1 (Power supply 2.5V)
- ⑥ Other Options:
00 = Standard (Tray Packing)
R0 = Tape & Reel