




CJ50 Series Board Mount Telephone Jacks

- Available from 2 ports and up
- Stacked assembly type
- With PCB pegs
- Insulator: Grey, Glass Filled polyester
- Flammability Rating: UL 94V-0
- Cavity confirms to FCC rules and regulations PART 68, SUBPART F

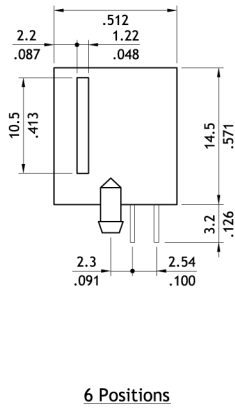


RoHS Compliant


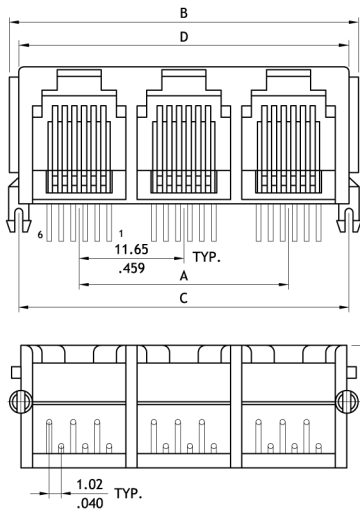


6 Positions

$A = 11.65 * (P-1)$
 $B = 11.65 * P + 2.50$
 $C = 11.65 * P + 0.5$
 $D = 11.65 * P + 0.5$
 P = Number of ports
 (from 2 ports thru up)

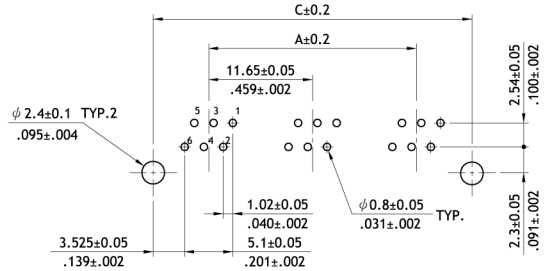


Recommended P.C. Board Layout

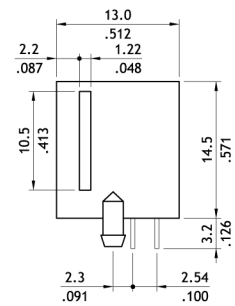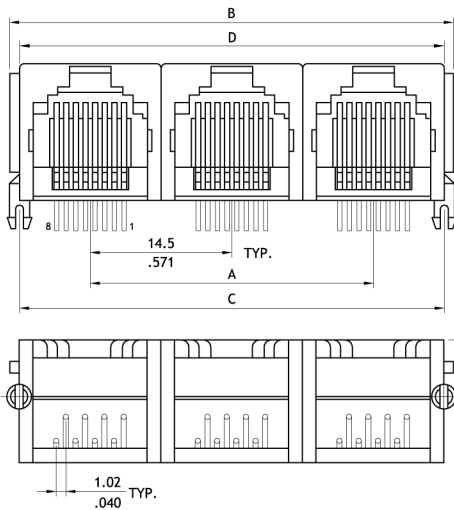

8 Positions

$A = 14.5 * (P - 1)$
 $B = 14.5 * P + 3.0$
 $C = 14.5 * P + 0.5$
 $D = 14.5 * P + 0.5$
 P = Number of ports
 (from 2 ports thru up)

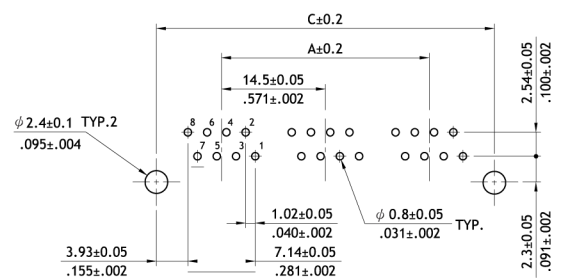

Recommended P.C. Board Layout

Ordering Code

1
2
3
4
5
6

CJ50 88 2 6 9 00

- 1** Series No.
- 2** No. of Circuits: 66 = 6P6C, 64 = 6P4C
62 = 6P2C, 88 = 8P8C
- 3** Plating Code:
2 = Gold flash over Nickel
*Optional plating available but MOQ requested
- 4** Ports: 2 to up ports
- 5** Color Code: 9 = Grey
- 6** Ground pegs options:
00 = Standard
*Special options consult manufacturer